

*** 2075 ***

MATERIAL :


- * Insulator : PBT UL94V-0
- * Contact : Phosphor Bronze
- * Shell : Phosphor Bronze

2075 S 0 * 0 2 * L
1 2 3 4 5 6 7



1. Series No.
2. S : Socket
3. 0 : Single Stack
4. Contact plating:

- F = Selective gold flash over 50?²" nickel
- R = Selective gold flash over 30?²" Pd-Ni plated over 50?²" nickel
- K = 30?²" selective gold plated over 50?²" nickel

5. Type:
0 : A Type
6. Type:
2 : H Type Right Angle And Spring
7. Color :
0 : Beige
1 : Black
2 : White



P.C.B. MOUNTING DIMENSIONS

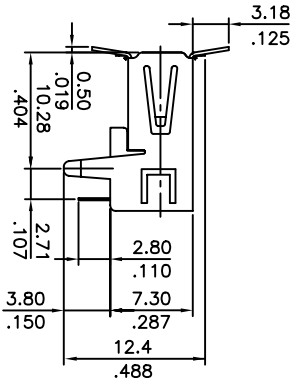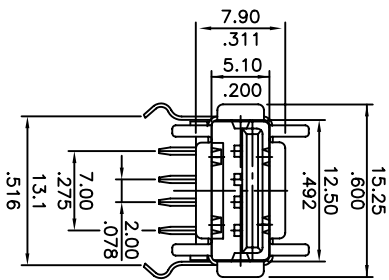

LEOCO LEOCO CORPORATION

GENERAL TOLERANCE

X. ± X. ± Z

.X ± 0.30 .X ±

.XX ± 0.20 .XX ±

.XXX ± 0.10 .XXX ±

APPROVED BY:

CHECKED BY:

DRAW BY:

PART NO.: 2075S0*02*L

TITLE: USB CONNECTOR

DRAWING NO.: 207506S

SCALE: 2:1

SIZE: A4

SHEET: 1/1

REV. D

REV.	ECO. NO.	CHG	APPD.	.XXX ±	0.10	.XXX ±			
D	E010143	Nick							
C	E000008	Nick							
B	E970450	POCA							
A	DWG REL.	POCA							

APPROVED BY:		PART NO.:	
CHECKED BY:		TITLE:	
DRAW BY:		DRAWING NO.:	
UNITS:		SCALE:	
mm / inch		2:1	
		SIZE:	
		A4	
		SHEET:	
		1/1	
		REV.:	
		D	