



PROD NO
SEE NOTES

1 | 2


3

4

- NOTES:**
MATERIALS:
 1. HOUSING : GLASS FILLED POLYESTER UL94V-0.
 COLOR : BLACK.
 2. CONTACT : COPPER ALLOY.
 3. SHIELD : COPPER ALLOY.
FINISH:
 1. CONTACT : SELECTIVE GOLD PLATED ON CONTACT AREA.
 150u" TIN-LEAD PLATED ON SOLDER TAILS AREA AND 50u" MIN. NICKEL UNDERPLATED ALL OVER.
 2. SHIELD : NICKEL PLATED.
OTHERS:
 1. PRODUCT SPEC : GS-12-271.
 2. PACKAGING SPEC : GS-14-891.

PART NUMBER: 10035266-65V12X

Gold Thickness:
 1-3u" 2-6u" 3-15u"
 4-30u" 5-50u"

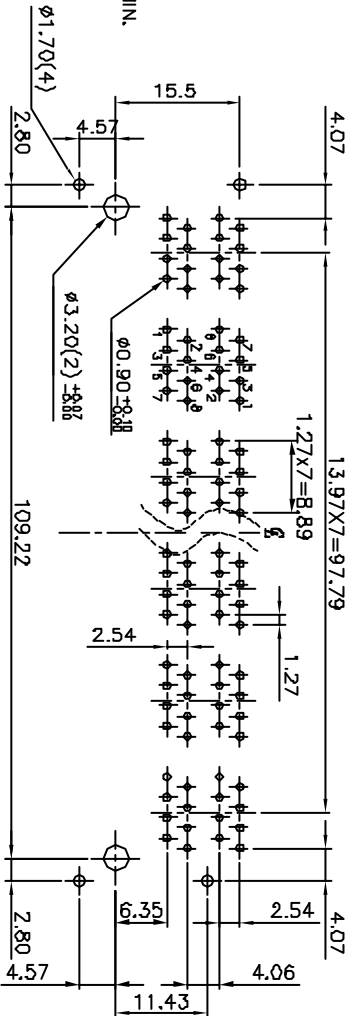

PC Board Thickness=1.60mm

PC Board Layout Component Side Shown

General Tolerance ±0.05

mat'l. code	tolerance unless otherwise specified	CUSTOMER COPY	title
lbr	.X ±.30	projection	R/A CAT5 D/D G/J ASSY 8 POS SHIELDED (2x8) product family Modular Jocks
A	.XX ±.15	MM	
	.XXX ±.05	scale	A4
	Ø ±.5	size	10035266
	dr JASMINE CHANG 10/19/03	sheet	2 of 2
	engr ALLEN CHANG 10/16/03	code	
	chr ROGER LIN 10/19/03		
	appd JAMES HSU 10/19/03		
sheet			
revision			
sheet			
index			

1 | 2

3

4

ACAD

code code
22526