
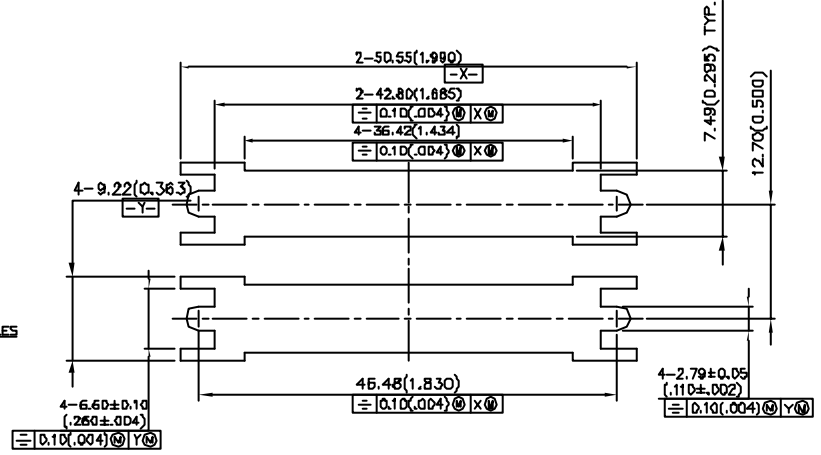
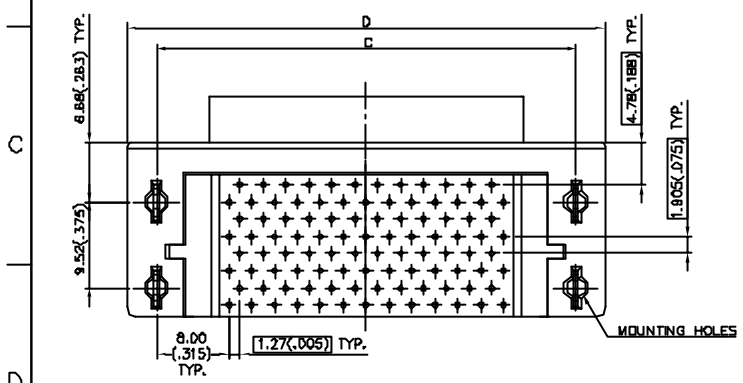


REV.	ZONE	LTR	DESCRIPTION	DATE	REVISOR	APPD
------	------	-----	-------------	------	---------	------

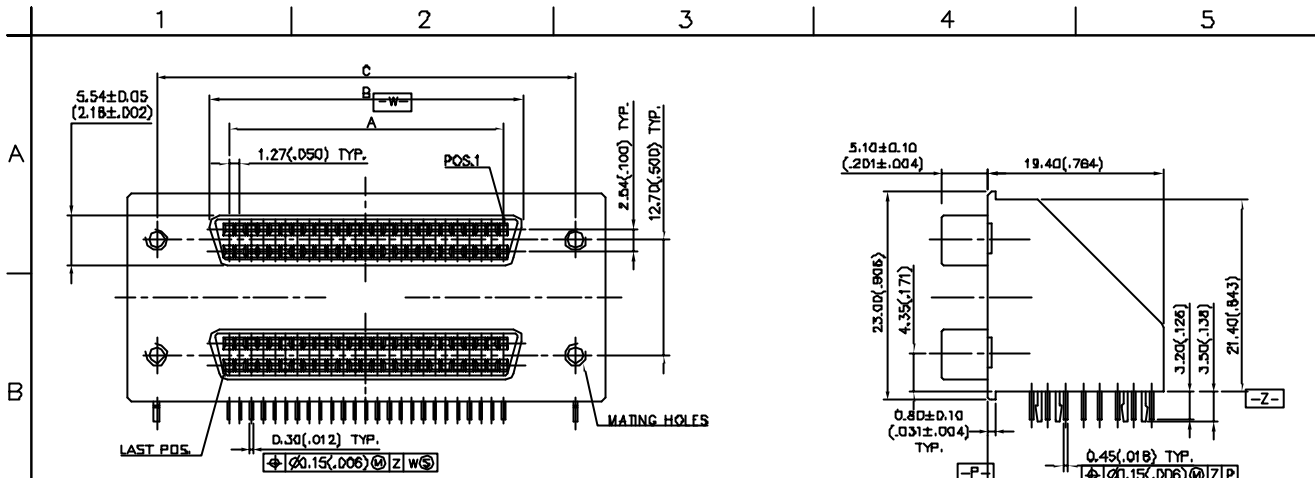

RECOMMENDED PANEL CUTOUT DIMENSIONS


ORDERING INFORMATION

BAN 050 5-3 * 3 * 2- **
 (1) (2) (3) (4) (5) (6) (7) (8) (9)

- SERIES NUMBER
 BAN: HIGH DENSITY 1.27mm(.050") SPACING
 DUAL-DECK MINI CONNECTOR R/A P.C.B TYPE
- NO. OF CONTACTS:
 EX 050: 50*2 POSITIONS
- CONTACT TYPE:
 S: SOCKET
- INSULATOR COLOR NUMBER
 3: BLACK
- CONTACTS FINISH
 0: SELECTED GOLD FLASH OVER 30u" NICKEL
 2: 15u" SELECTED GOLD OVER 50u" NICKEL
 3: 30u" SELECTED GOLD OVER 50u" NICKEL
 K: 6u" SELECTED GOLD OVER 50u" NICKEL
- METAL SHELL FINISH:
 3: NICKEL PLATED SHELL WITHOUT GROUNDING INDENTS
- SCREW TYPE:
 A. 2-56 UNC
 B. 4-40 UNC
 C. M2.6*0.45
- BRACKET TYPE:
 2: WITHOUT RAILS & LATCH BLOCKS
- SUFFIX NO:
 NONE: W/O "EDAINC" LOGO ON THE BRACKET AND HOUSING
 1D: W/ "EDAINC" LOGO ON THE BRACKET AND HOUSING

SPECIFICATION:

- INSULATOR MATERIAL: PBT WITH GLASS FIBER REINFORCED UL 94V-0
- SPACER: PBT WITH GLASS FIBER REINFORCED, UL 94-V0
- BRACKET MATERIAL: ZINC ALLOY, NICKEL PLATING OVER COPPER
- CONTACTS MATERIAL: PHOSPHOR BRONZE, GOLD PLATING ON CONTACT AREA, TIN-LEAD PLATING ON SOLDERING AREA, ALL OVER NICKEL UNDERPLATING
- HARPOON MATERIAL: PHOSPHOR BRONZE, TIN PLATING
- RATED CURRENT: 1A
- INSULATION RESISTANCE: 1000Ω MIN.
- CONTACT RESISTANCE: 35mΩ MAX.
- DIELECTRIC WITHSTANDING VOLTAGE: AC 500V FOR 1 MINUTE
- OPERATING TEMPERATURE: -25°C ~ +85°C.

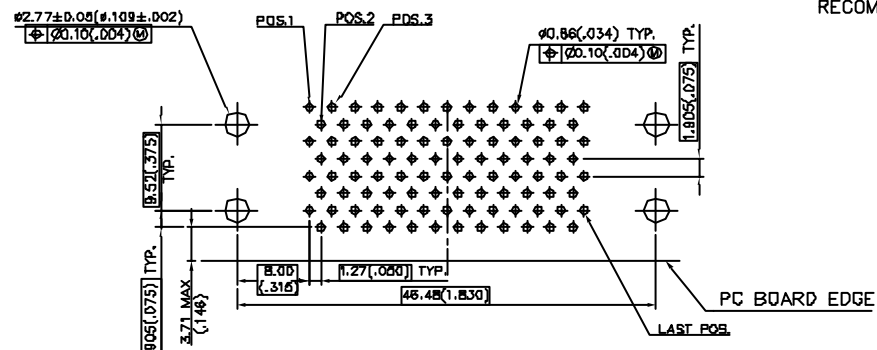


RECOMMENDED P.C.B. MOUNTING DIMENSIONS
 P.C.B THICKNESS 1.573±0.20(.062±.008)

53.00 (2.087)	46.48 (1.830)	34.70 (1.366)	30.48 (1.200)	BAN050S*
D	C	B	A± ^{0.13} _(.005)	PART NO.


TOLERANCE UNSPECIFIED				SCALE		UNIT	
.000	±0.13(.005)			1.67:1		MM(INCH)	
.00	±0.25(.010)			NAME		SHEET	
.0	±			MWLIN 10/26'99		BAN SERIES 1.27(.050) SCSI-II H.D. DUAL-DECK R/A P.C.B. TYPE CONNECTOR	
ANGLE	±			Checked		REV.	
Draw	±			胡森華		Drawing No. R-S18AN-2	
Designer	±			Approved		REV.	
Checked	±			JOHN		R-S18AN-2	

REV.	ZONE	LTR	DESCRIPTION	DATE	REVISOR	APPD
------	------	-----	-------------	------	---------	------

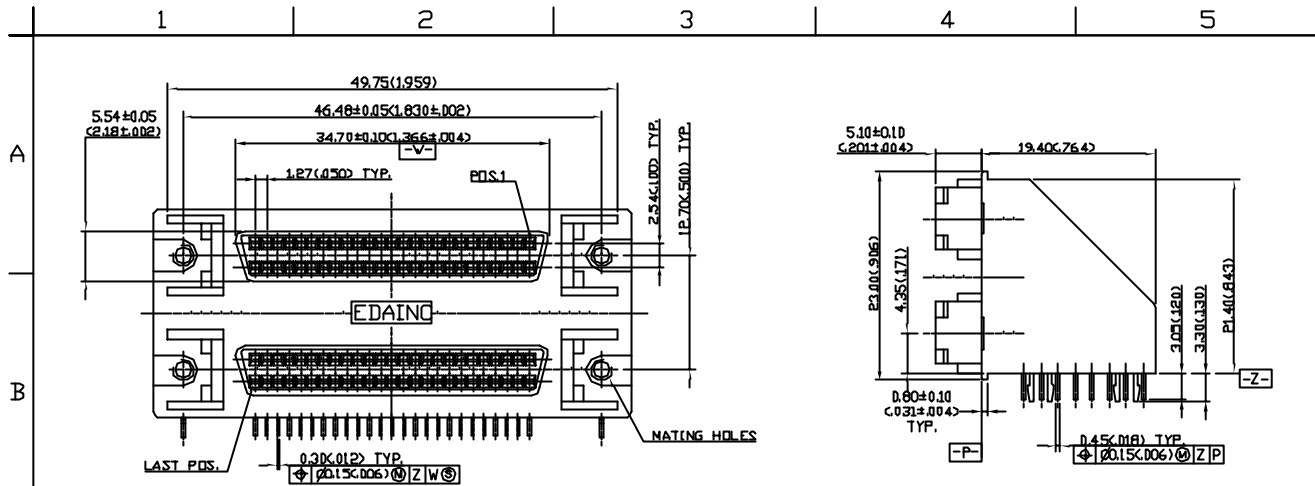


ORDERING INFORMATION
 8AN 050 S-3 2 3 A 1
 (1) (2) (3) (4) (5) (6) (7) (8)

- SERIES NUMBER
8AN-HIGH DENSITY 1.27mm(0.050") SPACING
DUAL-DECK MINI CONNECTOR R/A P.C.B. TYPE
- NO. OF CONTACTS:
EX 05060 POSITION
- CONTACT TYPE:
S: SOCKET
- INSULATOR COLOR NUMBER
3: BLACK
- CONTACTS FINISH
0: SELECTED GOLD FLASH OVER 30u" NICKEL
2: 15u" SELECTED GOLD OVER 50u" NICKEL
3: 30u" SELECTIVE J GOLD OVER 50u" NICKEL
- METAL SHELL FINISH:
3: NICKEL PLATED SHELL WITHOUT GROUNDING INDENTS
- SCREW TYPE:
A: 2-56 UNC
B: 4-40 UNC
C: M2.6*0.45
- BRACKET TYPE:
1: WITH RAILS & LATCH BLOCKS
- SUFFIX:
NONE: W/O "EDAINC" LOGO
10W: "EDAINC" LOGO

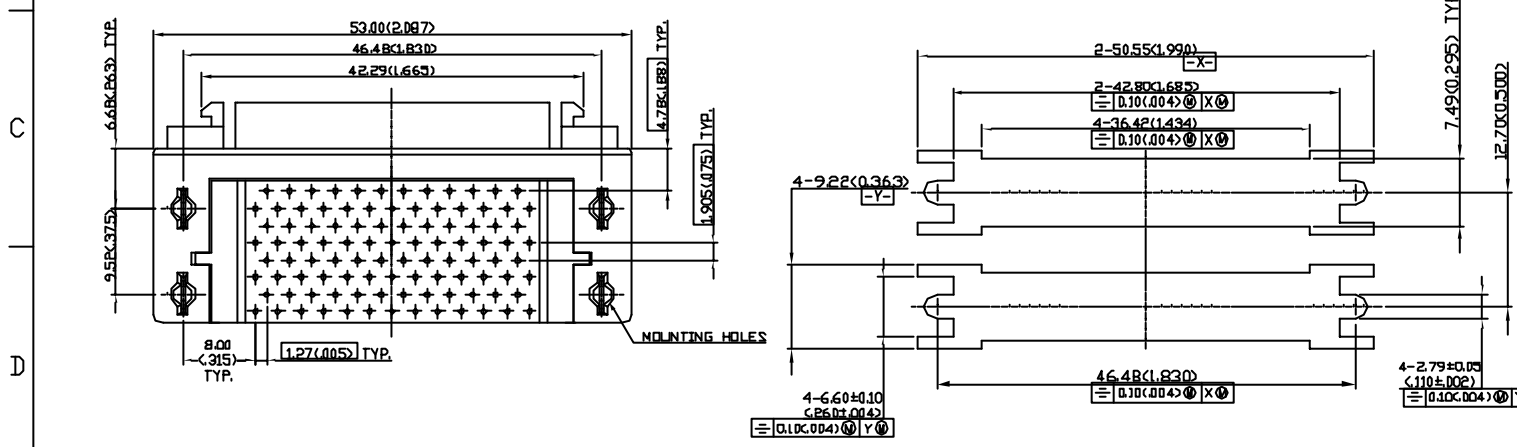

SPECIFICATION:
 INSULATOR MATERIAL: PBT WITH GLASS FIBER REINFORCED
 UL 94V-0
 SPACER: PBT WITH GLASS FIBER REINFORCED, UL 94-V0
 BRACKET MATERIAL: ZINC ALLOY, NICKEL PLATING OVER COPPER
 CONTACTS MATERIAL: PHOSPHOR BRONZE, GOLD PLATING
 ON CONTACT AREA, TIN-LEAD PLATING ON SOLDERING AREA,
 ALL OVER NICKEL UNDERPLATING
 HARPOON MATERIAL: PHOSPHOR BRONZE, TIN PLATING
 RATED CURRENT: 1A
 INSULATION RESISTANCE: 1000MΩ MIN.
 CONTACT RESISTANCE: 35mΩ MAX.
 DIELECTRIC WITHSTANDING VOLTAGE: AC 500V FOR 1 MINUTE
 OPERATING TEMPERATURE: -25°C → +85°C.

RECOMMENDED PANEL CUTOUT DIMENSIONS

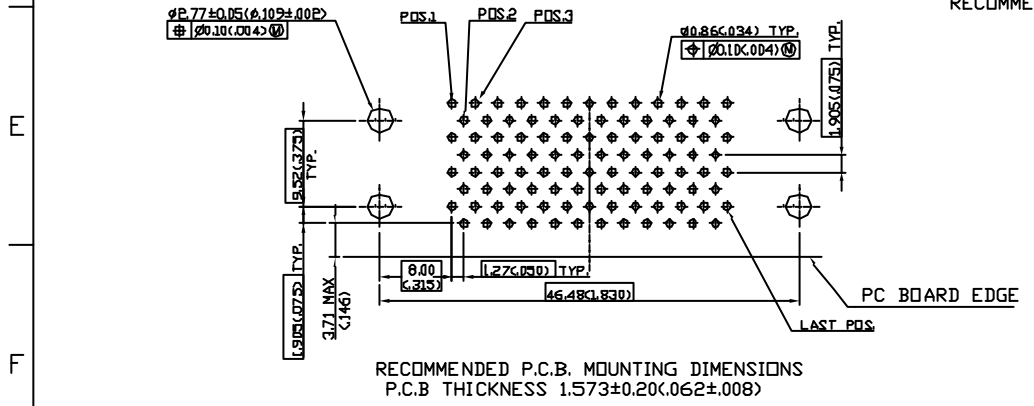

RECOMMENDED P.C.B. MOUNTING DIMENSIONS
 P.C.B. THICKNESS 1.573±0.20(0.062±0.008)

TOLERANCE UNSPECIFIED	±0.13(0.005)
0.0	±0.25(0.010)
0.0	±
0.0	±
ANGLE	±°
Draw	Bill 6/27/99
Designer	Bill
Checked	PeterHu
Approved	Jahn

FREEPORT

SCALE 1.67:1 UNIT MM(INCH)

NAME 8AN SERIES 1.27(0.050) SCSI-II H.D. DUAL-DECK R/A P.C.B. TYPE CONNECTOR SHEET 1/1

Drawing No. R-S18AN-0 REV. 0