

Real Time Clock Oscillation Circuit

[S-35190A/S-35390A] 8pin TSSOP(3.0x4.4) 0.65mm pitch

Measurement conditions : 5.0V , 3.0V





Model : SSP-T7
 Frequency : Fo=32.768kHz
 Frequency tolerance : dF/Fo= +/-20x10⁶
 Load capacitance : CL=7.0pF
 Equivalent series resistance : R1=65kohm max
 Max. Drive level : DL=1x10⁶W max
 Recommended drive level : DL=0.1x10⁶W typ

FEATURES

- 1.Ultra thin type with 1.4mm Max.
- 2.SMD type suitable for automatic & high density surface mounting.
- 3.Plastic mold package containing highly reliable tubular type quartz crystal.
- 4.Excellent shock and heat resistance.
- 5.Cellular phones,PDA,Radio communication equipment, Portable applications etc.

RECOMMENDED SOLDERING PATTERN

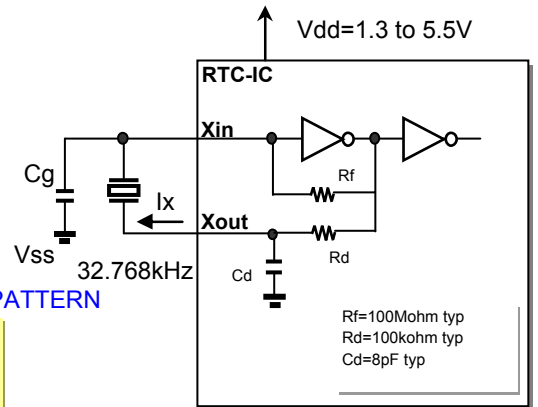

$$CL = CgCd / (Cg + Cd) + Cs$$

Remark) Ix : current through crystal

MODEL:SSP-T7 7.0pF with S35190A/S35390A at 25°C

Key specifications	Vdd=3.0V	Vdd=5.0V	Remarks
Current control resistance : Rd (k ohm)	Built-in	Built-in	Control drive level & secure phase margin
Capacitance at gate : Cg (pF)	8	8	Optimal capacity in response to CL
Capacitance at drain : Cd (pF)	Built-in	Built-in	(CL = Cd // Cg + stray capacitance)

Circuit characteristics (at 25°C)	Vdd=3.0V	Vdd=5.0V	Remarks
Matching Accuracy : df / f (x10 ⁻⁶)	0.2	0.2	Frequency offset volume at specified Vdd
Voltage Fluctuation : +/-df / V (x10 ⁻⁶)	0.0	0.0	Vdd +/-10% (Standard operating voltage range)
Drive Level : DL (x10 ⁶ W)	0.01	0.01	DL=Ix ² Re < 1x10 ⁶ W, Re=R1(1 + Co / CL) ²
Negative resistance : - RL (kohm)	677	677	5 times larger than R _{1MAX}
Oscillation allowance : M (times)	10.4	10.4	Judgemental standard of oscillation stability
Voltage of oscillation start : Vstart (V)	0.53	0.53	
Voltage of oscillation stop : Vstop (V)	0.48	0.48	
Oscillation start up time : Ts (sec)	0.30	0.28	Time to reach 90% of output level

Temperature characteristics of circuit		Vdd=3.0V	Vdd=5.0V	Remarks
at -40°C	Variation : df / T (x10 ⁻⁶)	-140	-140	Typ.Tp=25°C (K = -3.5x10 ⁻⁸ / °C ²)
at +85°C	Variation : df / T (x10 ⁻⁶)	-132	-132	Typ.Tp=25°C (K = -3.5x10 ⁻⁸ / °C ²)

The above mentioned value is only for your reference. The value is for the arbitrary samples and does not guarantee the product's characteristics. Please review and check above parameters at customer's end.

Seiko Instruments USA Inc.


2990, West Lomita Blvd., Torrance, CA 90505, U.S.A
 Telephone : +1 310-517-7771 Facsimile : +1 310-517-7792
 Email : crystals@siu-la.com

Seiko Instruments GmbH

Siemensstrasse 9, D-63263 Neu-Isenburg, Germany
 Telephone : +49-6102-297-0 Facsimile : +49-6102-297-320
 Email : info@seiko-instruments.de

Seiko Instruments Inc.

1-8, Nakase, Mihama-ku, Chiba-shi, Chiba 261-8507, Japan
 Facsimile : +81-43-211-8030
 E-mail : component@sii.co.jp









Seiko Instruments Inc.
 Phone: +81-43-211-1207(Direct)

Real Time Clock Oscillation Circuit

[S-35190A/S-35390A] 8pin TSSOP(3.0x4.4) 0.65mm pitch
 Measurement conditions : 5.0V , 3.0V



Test Data

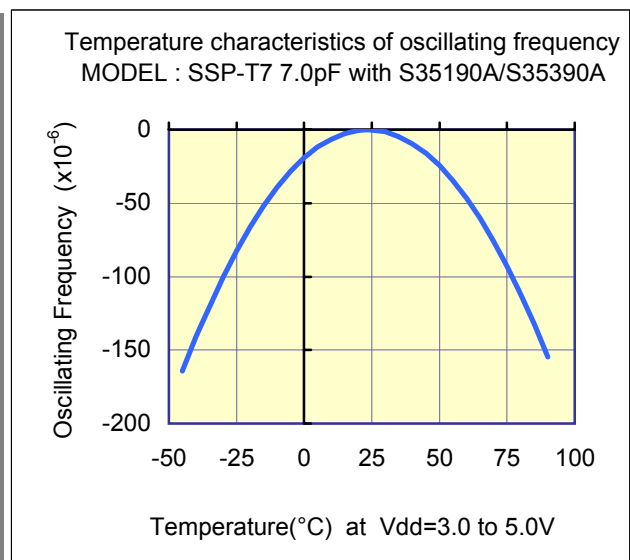
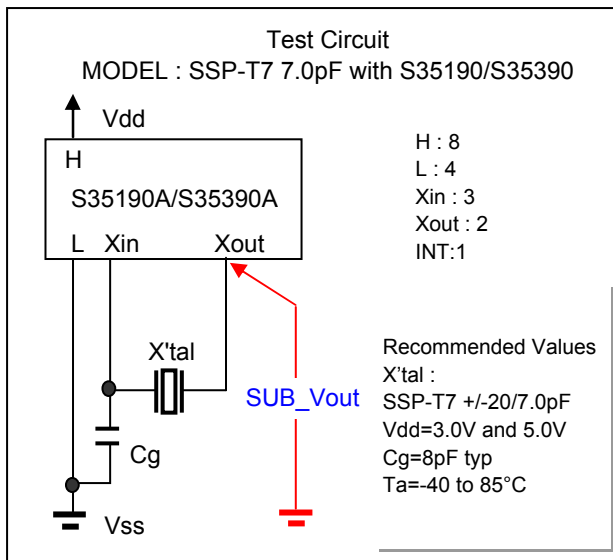
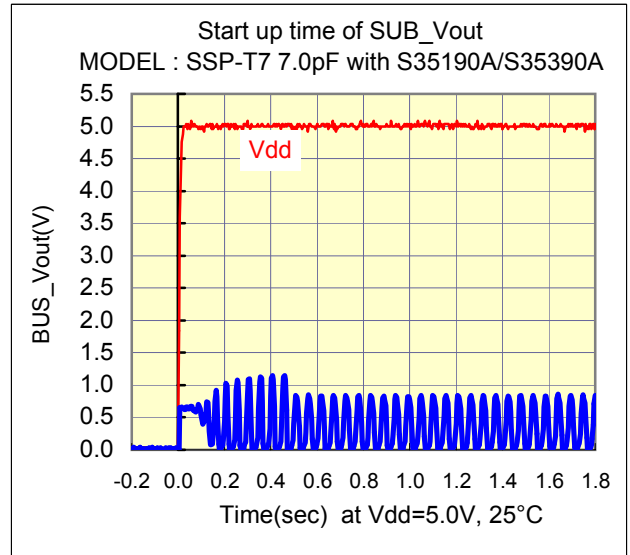
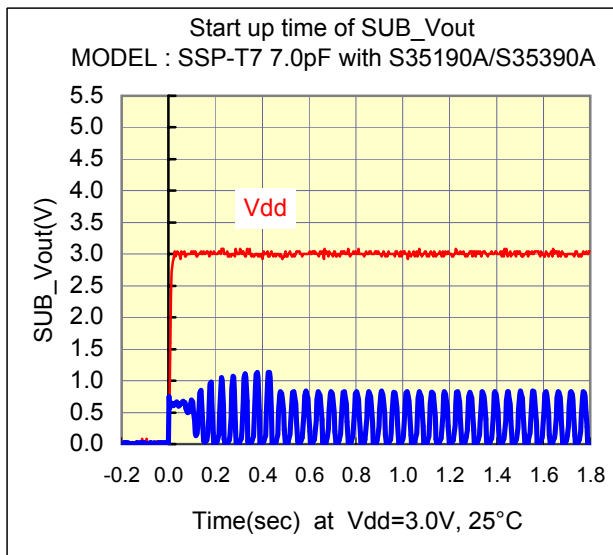
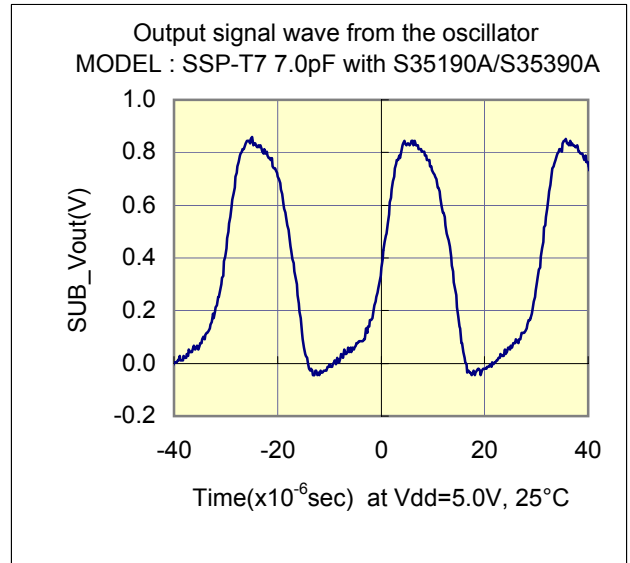
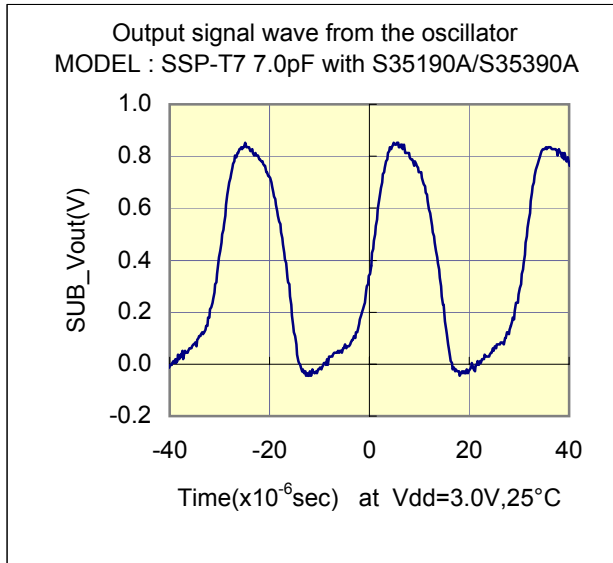


Real Time Clock Oscillation Circuit

[S-35190A/S-35390A] 8pin TSSOP(3.0x4.4) 0.65mm pitch
 Measurement conditions : 5.0V , 3.0V



Test Data : Temperature characteristics

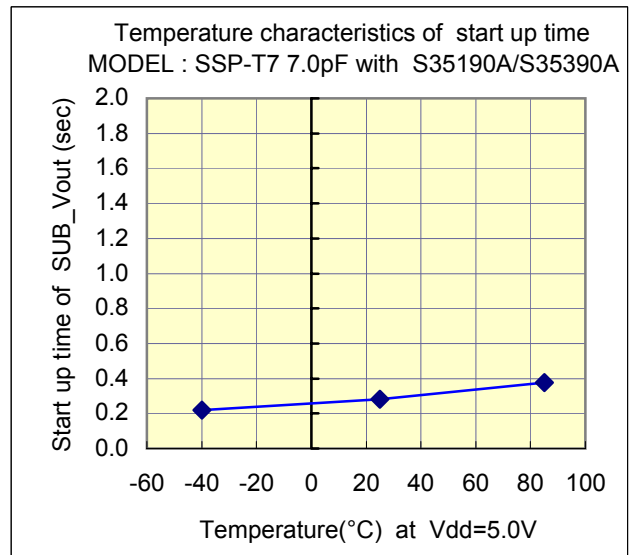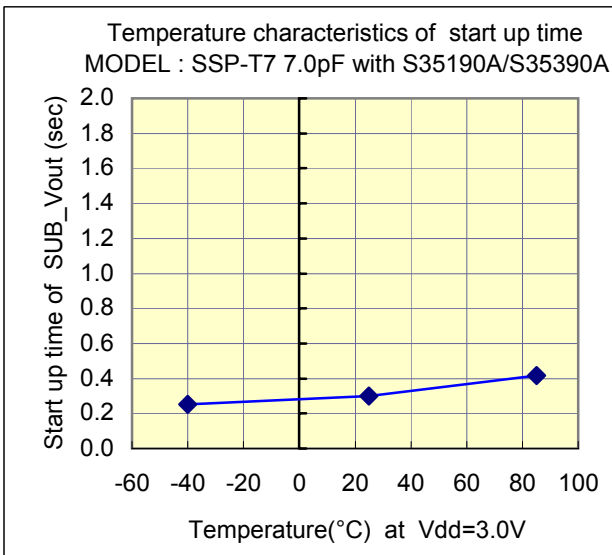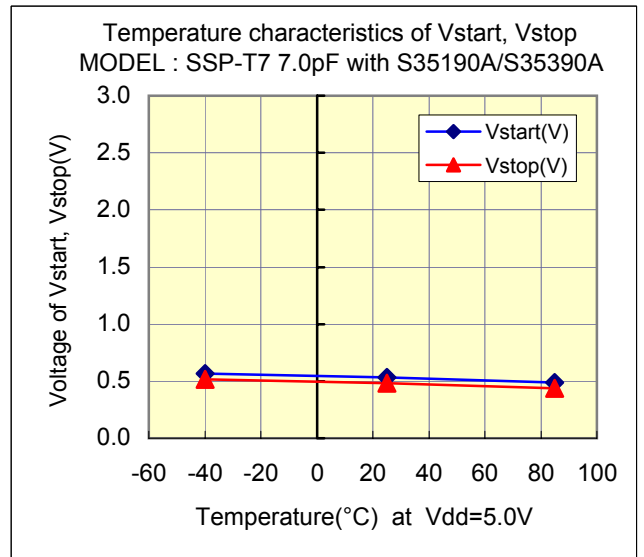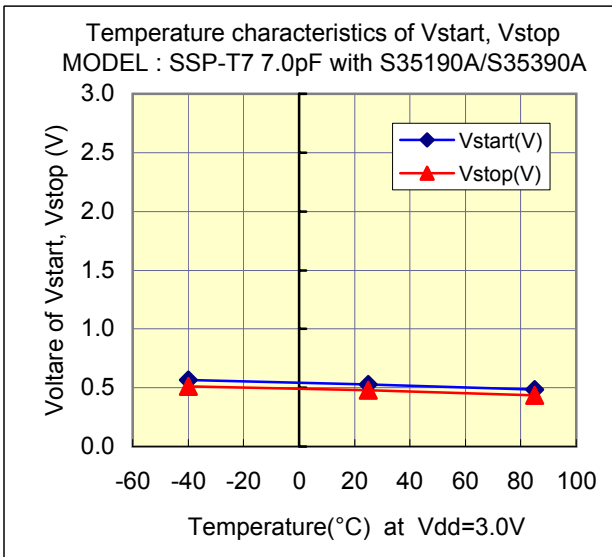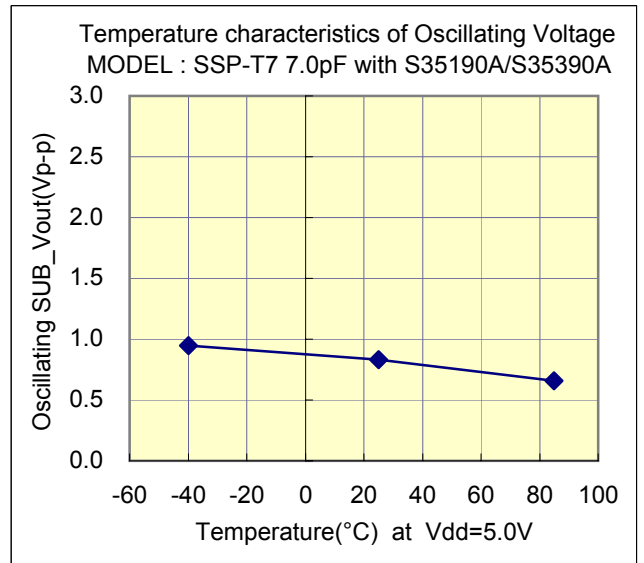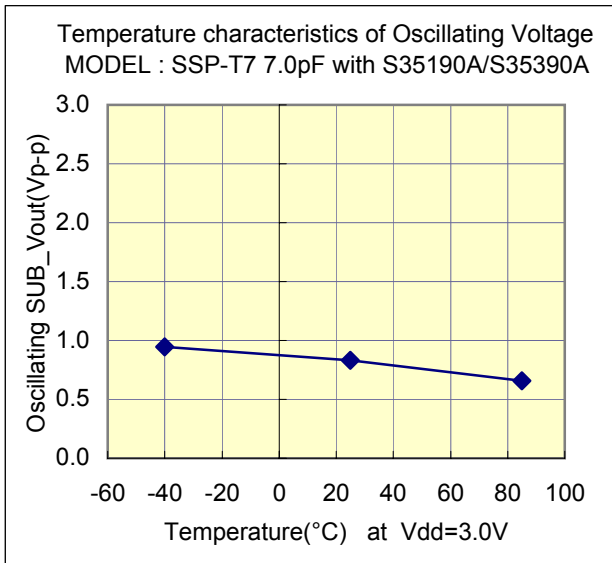

Real Time Clock Oscillation Circuit

[S-35190A/S-35390A] 8pin TSSOP(3.0x4.4) 0.65mm pitch
 Measurement conditions : 5.0V , 3.0V



Referential components layout(see Figure 1)

* When using the crystal oscillator with a CL value of 7pF, externally connect Cd if necessary.

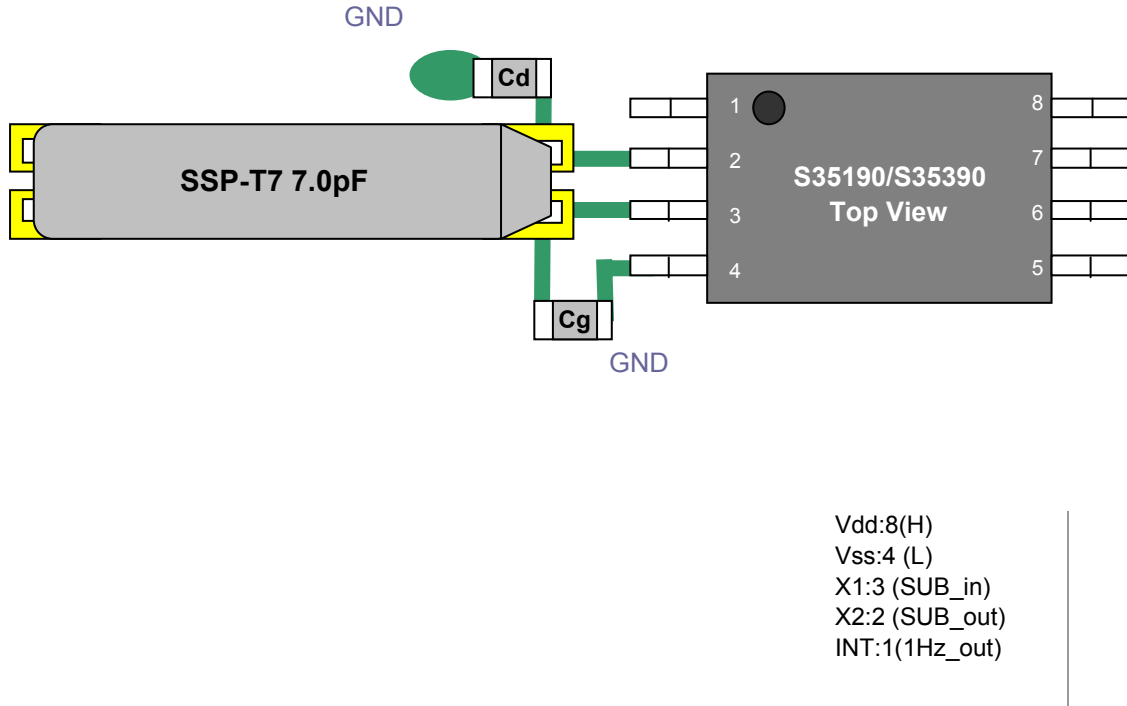


Figure 1 Referential components layout

Notes Board Design

When using a crystal resonator, place the resonator and its load capacitors as close as possible to SUB_in and SUB_out pins.
 Other signal lines should be routed away from the resonator circuit to prevent induction from interfering with correct oscillation (see figure 2).

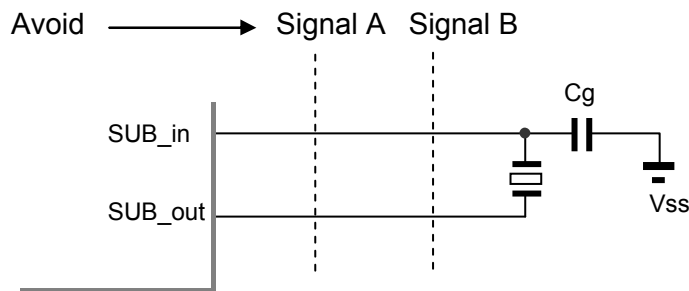


Figure 2 Example of Incorrect Board Design

Real Time Clock Oscillation Circuit

[S-35190A/S-35390A] 8pin TSSOP(3.0x4.4) 0.65mm pitch
 Measurement conditions : 5.0V , 3.0V



[Evaluation Sample : SSP-T7 7.0pF at 25°C]


SAMPLE	No.	CL (pF)	Fo (Hz)	fr (Hz)	R1 (kohm)	Co (pF)	C1 (fF)	Q (k)
SSP-T7 7.0pF	1	7.0	32768.40	32764.24	37.8	0.83	1.987	64.7
	2	7.0	32767.88	32763.63	39.2	0.85	2.037	60.9
	3	7.0	32767.83	32763.68	40.3	0.83	1.983	60.8

[IC Test Data : IC samples Cg=8pF at 25°C]

Vcc (V)	IC samples	Fosc (Hz)	df / f (x10 ⁻⁶)	DL(x10 ⁻⁶ W)	-RL (kohm)	Vstart(V)	Ts(sec)
5.0	#15_TYP	32768.41	0.19	0.01	677	0.53	0.28
	#17_HHD	32768.38	-0.51	0.02	727	0.66	0.24
	#19_HLD	32768.20	-6.01	0.01	727	0.68	0.21
	#21_LHD	32768.57	5.29	0.01	677	0.45	0.34
	#23_LLD	32768.39	-0.31	0.01	797	0.44	0.38
3.3	#15_TYP	32768.41	0.19	0.01	677	0.53	0.30
	#17_HHD	32768.38	-0.51	0.02	727	0.66	0.22
	#19_HLD	32768.20	-6.01	0.01	727	0.68	0.22
	#21_LHD	32768.57	5.29	0.01	677	0.45	0.35
	#23_LLD	32768.39	-0.31	0.01	797	0.44	0.41

Remark (see figure 3)

$$F_o = f_r \times \{ C_1 / (2 \times (C_o + C_L)) + 1 \} \text{ (Hz)}$$



- Fo : Load resonance frequency
- fr : Resonance frequency
- R1 : Motional resistance
- C1 : Motional capacitance
- Co : Shunt capacitance
- CL : Load Capacitance


Figure 3 Equivalent circuit of crystal unit, and CL

Remark (see figure 4)

Approximate formula of the load capacitance of the circuit CL.

$$CL = C_g \times C_d / (C_g + C_d) + C_s \text{ (pF)}$$

Where Cs(=2 to 4pF) Stands for stray capacitance of the circuit.

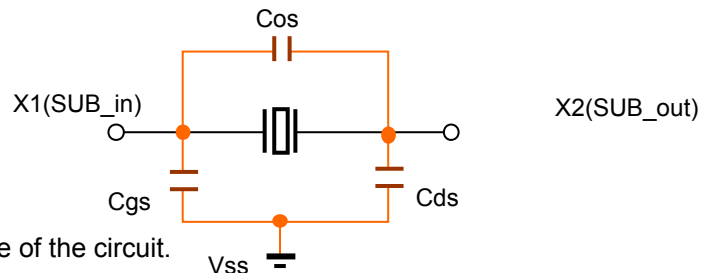

- Cos : X1_X2 Stray capacitance
- Cgs : X1_Vss Stray capacitance
- Cds : X2_Vss Stray capacitance

Figure 4 Stray capacitance Cos,Cgs,Cds of the circuit

Resonator circuit constants will differ depending on the resonator element, stray capacitance in its interconnecting circuit, and other factors. Suitable constants should be determined in consultation with the resonator element manufacturer.