
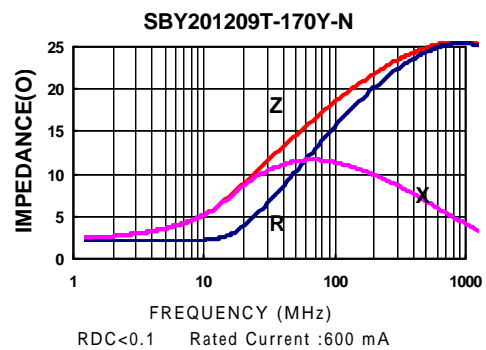


SMD Multilayer Ferrite Chip Beads - SB201209 Series









Electrical Characteristics

Part Number	Test Frequency (MHz)	Impedance (±25%)	DC Resistance () Max	Rated current (mA) Max
SBY201209T-070Y-N	100	7	0.10	600
SBY201209T-090Y-N	100	9	0.10	600
SBY201209T-110Y-N	100	11	0.10	600
SBY201209T-170Y-N	100	17	0.10	600
SBY201209T-320Y-N	100	32	0.10	600
SBY201209T-400Y-N	100	40	0.10	500
SBY201209T-560Y-N	100	56	0.15	500
SBK201209T-600Y-N	100	60	0.15	500
SBK201209T-700Y-N	100	70	0.15	500
SBK201209T-800Y-N	100	80	0.15	500
SBK201209T-121Y-N	100	120	0.25	300
SBK201209T-151Y-N	100	150	0.25	300
SBK201209T-221Y-N	100	220	0.30	300
SBK201209T-301Y-N	100	300	0.30	300
SBK201209T-401Y-N	100	400	0.30	300
SBK201209T-501Y-N	100	500	0.40	300
SBK201209T-601Y-N	100	600	0.40	300
SBK201209T-751Y-N	100	750	0.50	200
SBK201209T-102Y-N	100	1000	0.50	200
SBK201209T-152Y-N	100	1500	0.60	200
SBK201209T-202Y-N	100	2000	0.70	200
SBK201209T-222Y-N	100	2200	0.70	200
SBK201209T-252Y-N	100	2500	0.70	200
SBK201209T-272Y-N	100	2700	0.70	200

Test Instruments : HP4291A Impedance / Material Analyzer








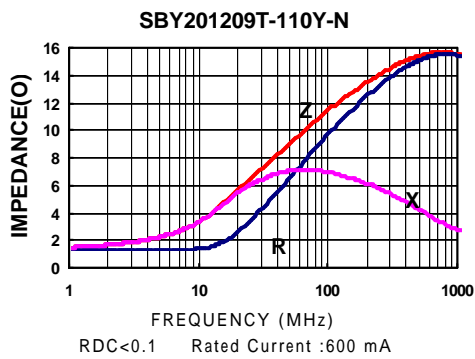


SMD Multilayer Ferrite Chip Beads – SB201209 Series

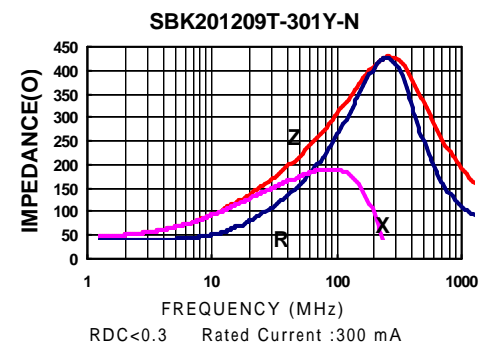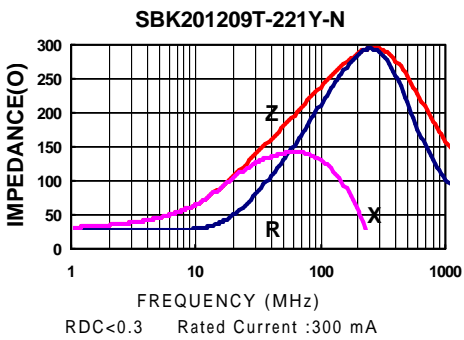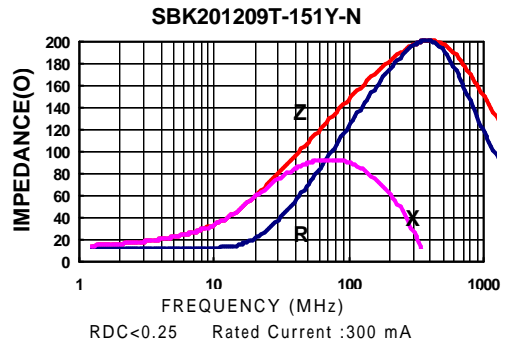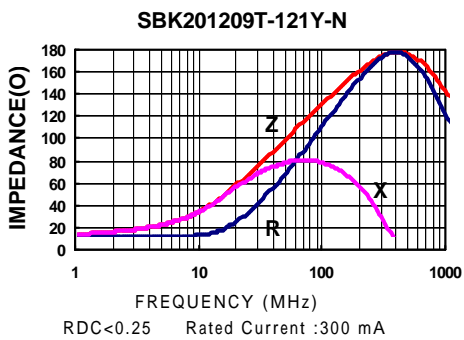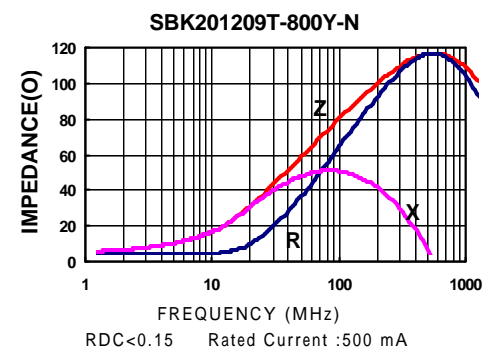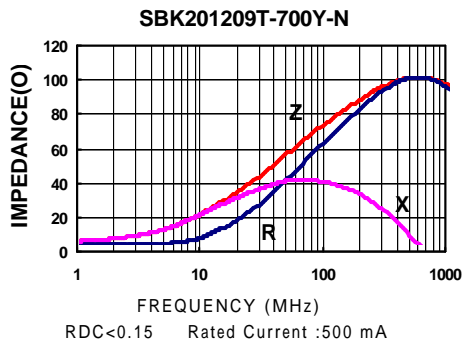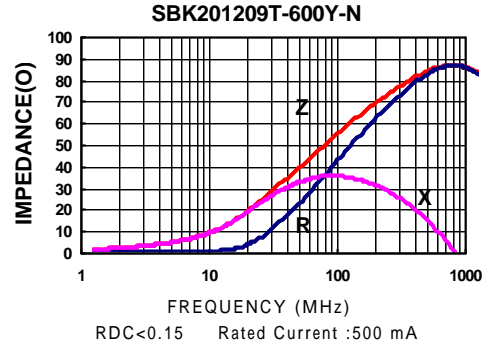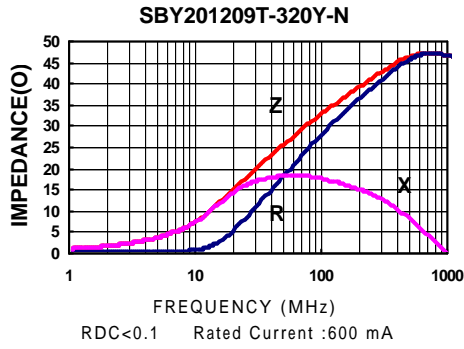


SMD Multilayer Ferrite Chip Beads - SB201209 Series

Test Instruments : HP4291A Impedance / Material Analyzer

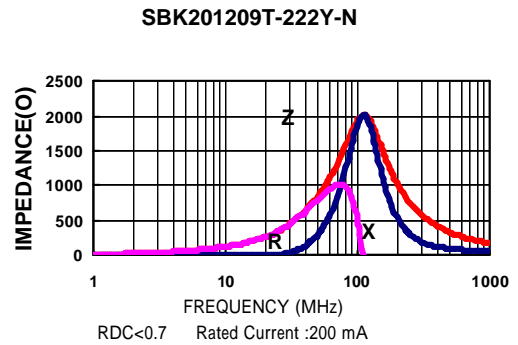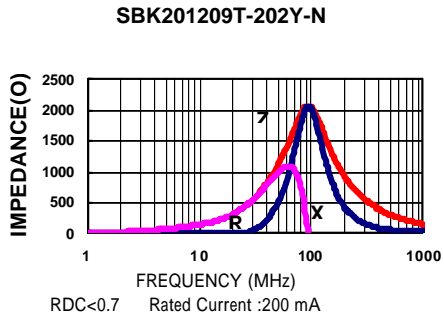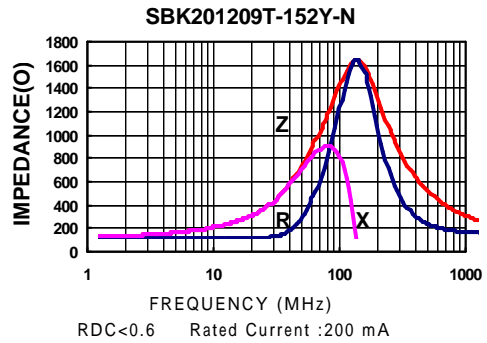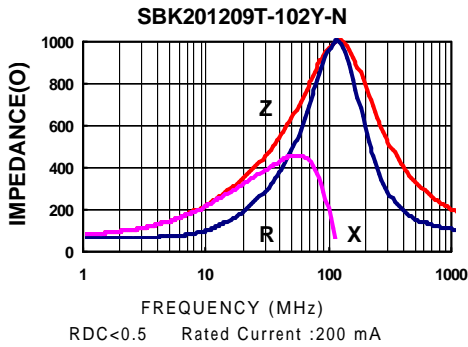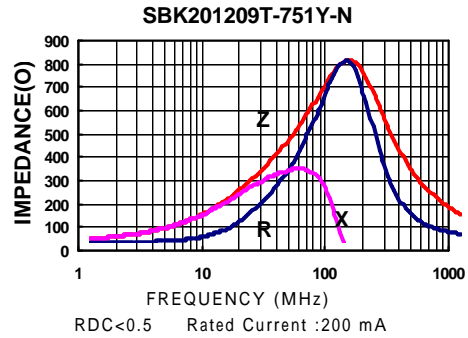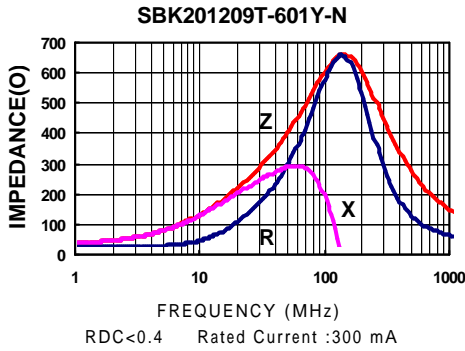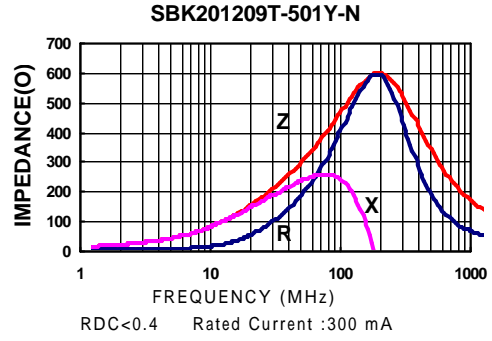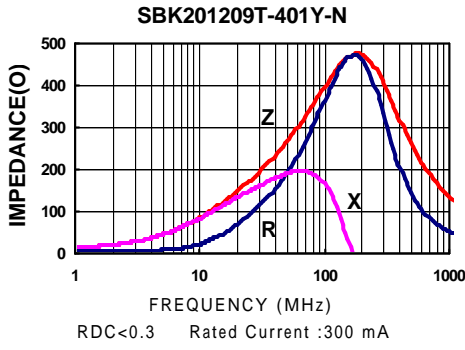

Test Instruments : HP4291A Impedance / Material Analyzer

SBK201209T-252Y-N

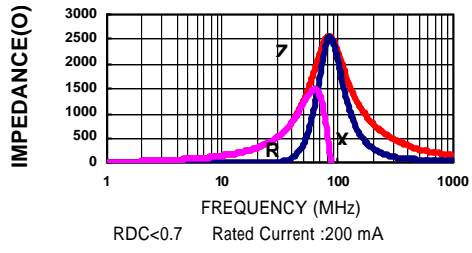

SBK201209T-272Y-N

