


### TYPE YCS-RL

#### UNISPLICE™

Jumper Sleeve for ACSR, All Aluminum 6201, 5005 Compressed and Compact Conductors.

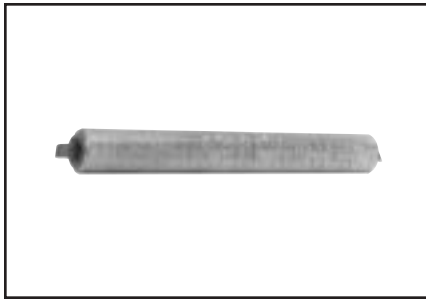

Aluminum jumper sleeve, with cable stop, designed to be installed with same dies as equivalent full-tension UNISPLICE™. Withstands jumper loop-tensile and vibration stresses. Pre-filled with PENETROX™ joint compound and capped.

CATALOG NUMBER	CONDUCTOR †††	L	DIE INDEX	TOOLS, DIE SET CATALOG NUMBER, & (CRIMPS PER END)		
				MD7, MD6	Y35, Y750, Y45†, Y46‡	
YCS25RL	1/0 ACSR (6-1)	6-1/4	C or 247 or 702	W-C (12)	—	
	1/0 6201 (7)			—	U247 (3)	
	1/0 5005 (7)			W702 (4)	—	
	1/0 AAC (7)			NON-BOW*	—	
YCS26RL	2/0 ACSR (6-1)	5-5/8	659	—	U659 (3)	
	2/0 6201 (7)			—	—	
	2/0 5005 (7)			—	—	
	2/0 AAC (7)			—	—	
YCS28RL	4/0 ACSR (6-1)	5-1/4	654	—	U654 (3)	
	4/0 6201 (7)			—	—	
	4/0 5005 (7)			—	—	
	4/0 AAC (7)			—	—	
YCS321RL	336.4 ACSR (18-1)	5-1/4	655	—	U655 (3)	
	336.4 AAC (19)			—	—	
YCS341RL	397.5 AAC (19)	5-5/8	327	—	U327 (4)	
	397.5 ACSR (18-1)			—		—
	400 AAC (37, 61)			—		—
	336.4 ACSR (18-1, 26-7, 30-7)			—		—

\* MD6 NON-BOW Dies produce straight sleeves without rotating tool.

† U Die with adapter PT-6515

‡ U Die with adapter PUADP-1.

††† Accommodates ACSR with aluminized steel core.