


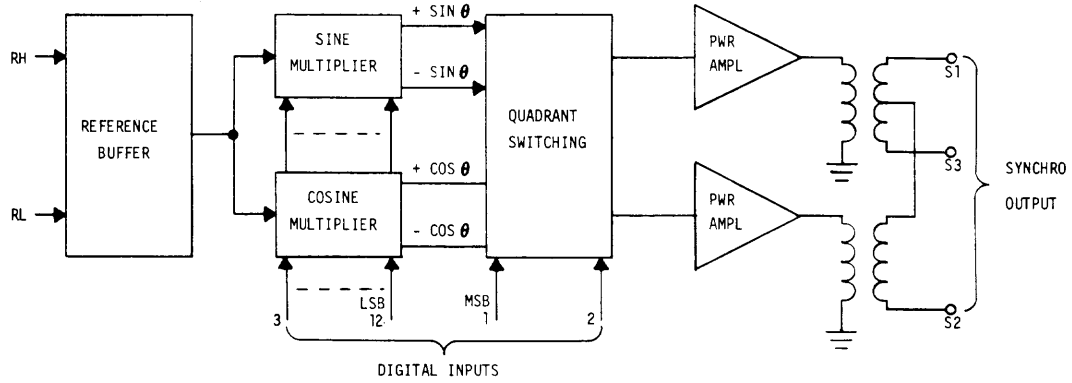


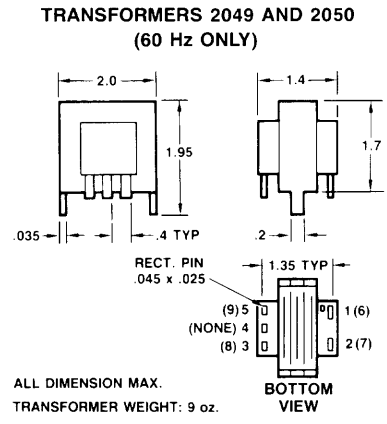

**BLOCK DIAGRAM:**

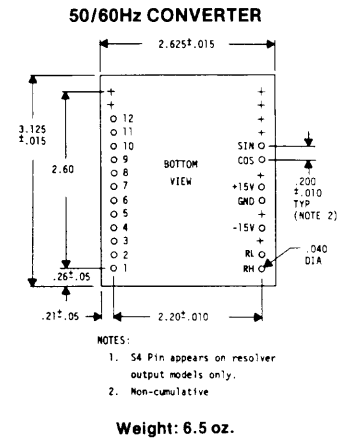


**CONFIGURATION:**

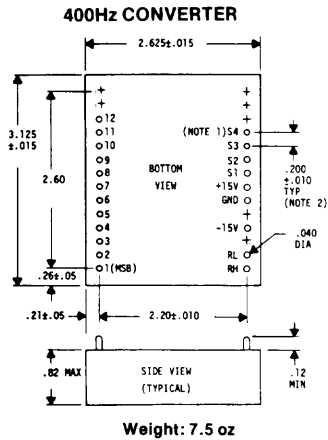

3-22

**INTERCONNECTING DATA (50/60 Hz):**

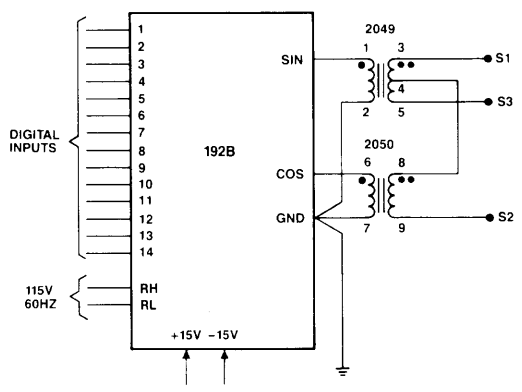

**ORDERING INFORMATION:**

| 192B SUFFIX | OUTPUT TYPE | L-L VOLTAGE | REFERENCE INPUT |
|-------------|-------------|-------------|-----------------|
| 800         | SYNC        | 11.8V       | 26V 400HZ       |
| 801         | SYNC        | 11.8V       | 115V 400HZ      |
| 802         | SYNC        | 90V         | 115V 400HZ      |
| 803         | RSVR        | 90V         | 115V 400HZ      |
| 804         | RSVR        | 11.8V       | 26V 400HZ       |
| 805         | RSVR        | 11.8V       | 115V 400HZ      |
| 806A        | SYNC        | 90V         | 115V 50-60HZ    |

Above part numbers describe commercial temperature devices (0° - +70°C), add suffix ET to part number for extended temperature range (-55° - +85°).