

Combiner

2 Channel Hybrid

Model: DSW1071-A

Application - WIRELESS


- ◆ Base Station
- ◆ PCS1900/DCS1800, EGSM, AMPS

Benefits

- ◆ Internal Termination
- ◆ Excellent Channel Balance
- ◆ Low Insertion Loss


Features

- ◆ Single Junction Isolated Inputs
- ◆ Integral Cable Interconnects
- ◆ Magnetically Screened

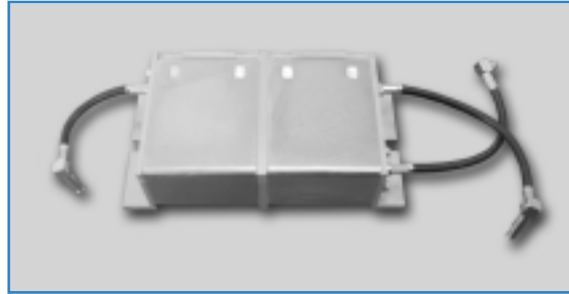

Specifications

Parameter	Specification			Units
	1930 to 1990			
Frequency	Min	Typ	Max	MHz
Insertion Loss	-	3.5	3.6	dB
Return Loss	21	23	-	dB
Isolation (i/p to o/p)	25	28	-	dB
Channel Isolation	50	55	-	dB
Amplitude Balance	-	+/-0.10	+/-0.15	dB
Forward Power (per channel)	-	-	40	W
Operating Temperature	-10	-	+70	°C

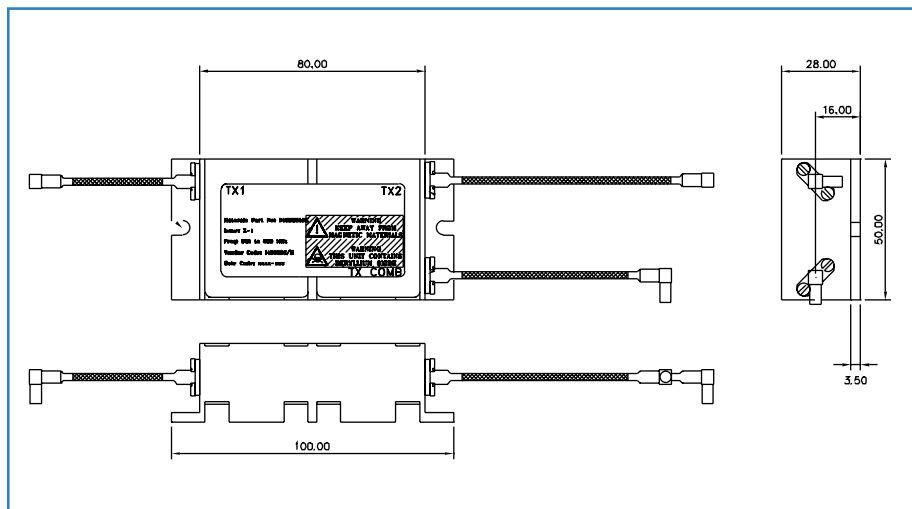

TRAK Microwave Limited
 Dunsinane Avenue, Dundee, Scotland DD2 3QF
 Phone: +44 (0)1382 833 411 ♦ Fax: +44 (0)1382 833 599
 E-mail: trakeurope@trak.com ♦ www.trak.com

