
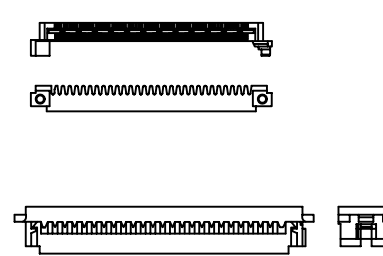


SPECIFICATION

Current Rating: 1A
 Insulation Resistance : 500 Megohms/Min.
 Withstanding Voltage : 500V AC/RMS For 1 Minute
 Contact Resistance : 35 Milliohms Max.
 Temperature Range : -55°C To +105°C
 Housing And Cover: Plastic Thermoplastic
 P.B.T UL 94V-0, Black
 Contact: Phosphor Bronze Gold Selective Plated
 Front Shell : Steel, Nickel Plated Over Copper

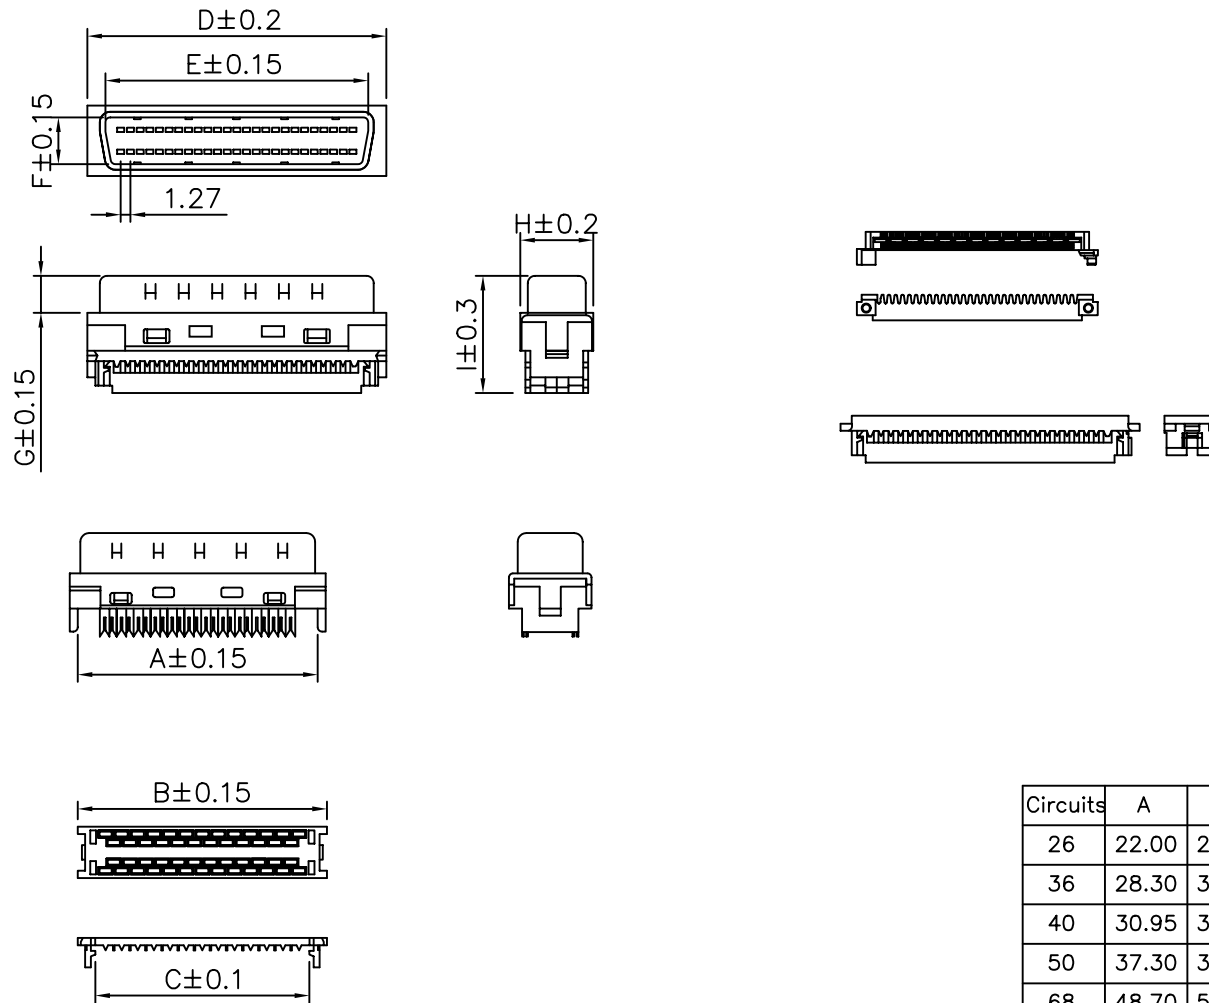

Circuits	A	B	C	D	E	F	G	H	I
26	22.00	24.00	18.80	24.00	19.65	5.70	4.70	9.30	14.30
36	28.30	30.20	25.20	30.40	25.96	5.70	4.70	8.40	13.75
40	30.95	31.85	27.75	32.95	28.50	5.70	5.00	9.30	15.30
50	37.30	39.20	34.10	39.30	34.85	5.70	5.00	9.30	15.30
68	48.70	50.73	45.53	50.60	46.35	5.80	5.00	9.30	15.30

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY Half Pitch		APPROVED BY MEI		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 AWG.
PART No. HPDXXXPF		CHECKED BY RAN		
DRAWING No. HPDXXXPF		DRAWING BY LXH		
SCALE NONE	REV. A	UNIT mm		

△	43.35 → 46.35	MEI	2004/03/22
AREA	REVISIONS	CHK	DATE