



X300 SERIES, ECL

High Reliability Hybrid Microcircuit Crystal Oscillators



Frequency Range 10 MHz to 220 MHz
 Frequency Accuracy @ +25 °C ± 15 PPM
 Frequency Stability Vs. Temperature See Options Below
 Operating Temperature Range See Options Below
 Input Voltage - 5.2 VDC ± 10%

Input Current at -5.2 VDC (No Load) 50 mA Max.

Output 10K & 10KH Compatible
 Load 100 Ω to - 2.0 VDC
 Symmetry 60/40% @ 50% Level
 Rise & Fall Times (10% to 90% Level) 2 nS Max.

Enable/Disable Input See Option Below

Start-up Time 10 mS Max.

Phase Jitter (10 KHz to 20 MHz Integrated) 0.1 pS rms Typical

Frequency Stability Vs. 10% change in Voltage ± 4 PPM Max.

Aging at +70 °C ± 3 PPM Max. first year, ± 2 PPM Max./ Yr. thereafter


Package & Hermeticity Conforms to the Requirements of MIL-PRF-55310

Terminations 50 to 80 Microinches gold over 100 to 250 microinches Nickel, Hot Solder Tinning per MIL-PRF-55310 is optional at additional cost.

Lead Soldering, Temp./Time 260 °C Max for 10 Seconds Max.

Package Weight & Thermal Resistance (θ_{JC}) XXX Gms typical, 50 °C / Watt

- **Ruggedized crystal mount**
- **High Shock & Vibration**
- **Low Profile Package**
- **Gated Output Available**

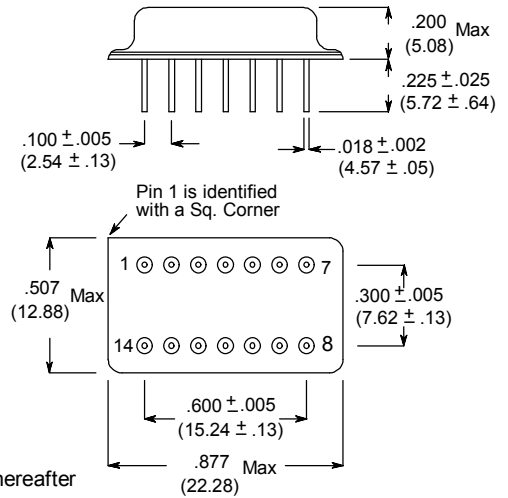

Dimensions: Inches (mm)

Pin #	Function
14	GND/CASE
7	-5.2 VDC
8	OUTPUT
9	E/D (Optional)
All Others	N/C

NOTE: For PECL applications, Xsis 300 Series ECL oscillators can be operated with +5 VDC ± 10% on Pin 14 and power supply return on Pin 7. The output logic levels will still be referenced to +5 VDC and the case will be at +5 VDC, however, 0.8 V peak to peak output signal can be AC or DC coupled.

Contact Xsis Engineering for any other special requirements.

ORDERING INFORMATION (Select from options below) :

X 3 - - FREQUENCY

Model #

Frequency Stability

- 1 = ± 0.1%
- 2 = ± 0.05%
- 3 = ± 100 PPM
- 4 = ± 50 PPM
- 5 = ± 20 PPM*
- 6 = ± 10 PPM*
- 7 = ± 25 PPM*

*Options 5, 6 & 7 are not available for all operating temperature range options

Operating Temperature Range

- 1 = 0 °C to +70 °C
- 2 = -40 °C to +85 °C
- 3 = -55 °C to +125 °C
- 4 = -55 °C to +105 °C
- 5 = -40 °C to +95 °C
- 6 = -20 °C to +70 °C

883B = Mil-Screening, Leave Blank Otherwise
H = Hi-Rel Screening, Leave Blank Otherwise

G = *Enable/Disable, Leave Blank Otherwise

*Enable/Disable Input is on Pin 9. A "low" level at the input enables the output.

EXAMPLE: X343 - 883B - 24.000 MHz = 10KH ECL Output, ± 0.005% over -55 °C to +125 °C, Mil-Screened, and 24.000 MHz