


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

PRE-RELEASED

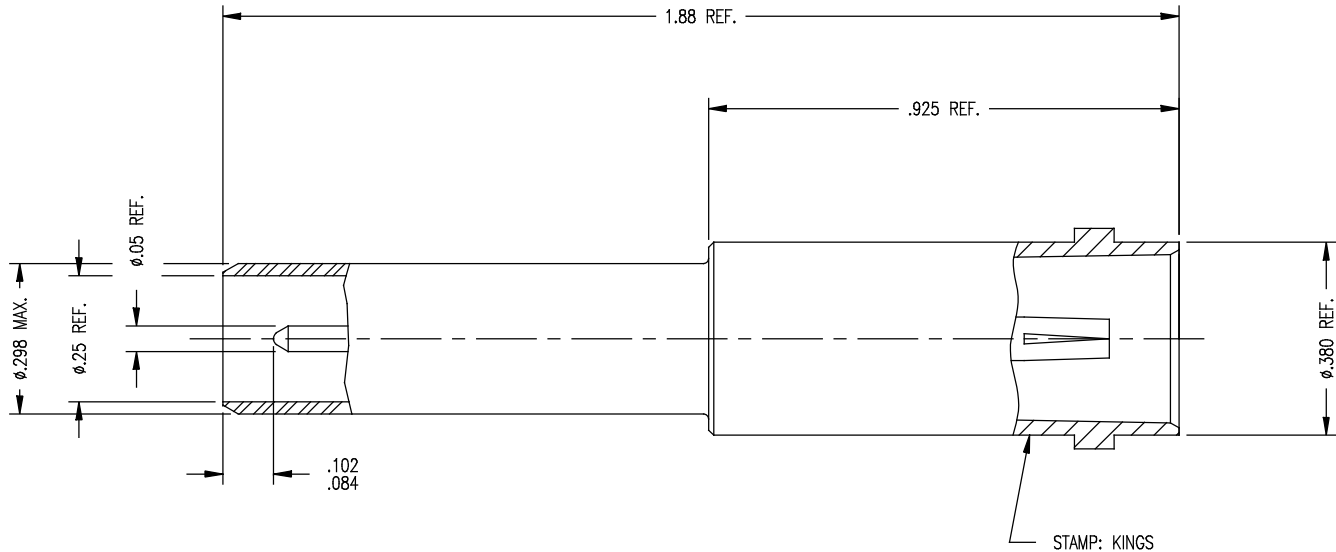

- NOTES:
- BNC INTERFACE PER MIL-STD-348, FIG. 301-2 AS APPLICABLE.
 - MATERIALS:
INSULATOR-TEFLON, ASTM-D-4894
CENTER CONTACT- BER. COP., ASTM-B-196
ALL OTHER METAL PARTS-BRASS, ASTM-B-16
 - FINISHES:
CENTER CONTACTS-GOLD PLATE PER ASTM-B-488
ALL OTHER METAL PARTS-KINGS TARNISH RESISTANT FINISH (TR-5)
 - ELECTRIAL CHARACTERISTICS:
NOMINAL IMPEDANCE-75 OHMS
WORKING VOLTAGE-500 VRMS
FREQUENCY RANGE-DC TO 500 MHz

UNLESS OTHERWISE SPECIFIED
 1. ALL DIMENSIONS IN INCHES [MILLIMETERS].
 2. TOLERANCES:
 .XXX ±.004 .XX ±.010
 [.XXX ±.10] [.XX ±.25]
 FRACTIONS: X/Y ±.010 [.25] ANGLES: ± 1°
 ★ CRITICAL DIMENSIONS

REVISIONS	
ISSUE	CHANGES
1	CN HVN 09/14/07
2	CN NEW SCM'S REQUEST HVN 02/01/08
3	ER 7373 HVN 04/08/08

777SD772-5N

CUSTOMER SALES DRAWING

SCALE	4:1		
APPROX SURFACE AREA			
USED ON			
REF:			
ADAPTER, M-F, PATCH PLUG-BNC			
DRAWN	H. NGUYEN	DATE	09/13/07
DESIGN	H. NGUYEN	DATE	09/13/07
APPR.		DATE	



SD772-5N