

Construction

- RM 8 ferrite core
- 8 pins

Features


- Complies with CCITT G.961 and EN 60950
- Use in NT and local central office
- Remote power feeding to NT
- Transmission code:
4B3T
- Matched to the following Siemens IC:
PEB 20901, PEB 20902

Packing



- Polyfoam tray
- Packing unit: 400 pcs.

Transformation ratio


$N_1 : N_2 : N_3 = 0,66 : 0,66 : 1$

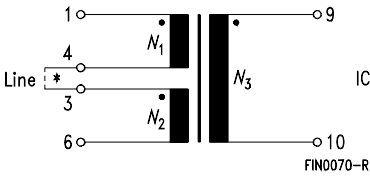

* = external connection

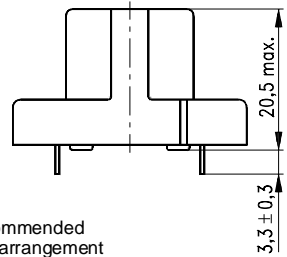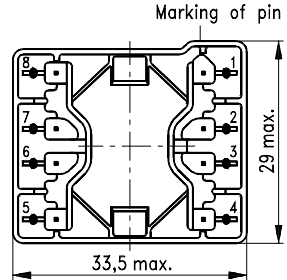

Recommended hole arrangement

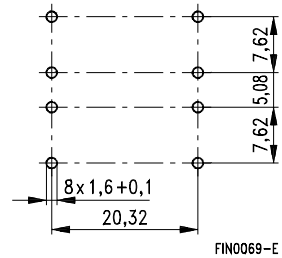

Technical data

Type	I _{DC} mA	L _H mH	L _S μH	C _K pF	R _{CuIN} mΩ	R _{CuIC} Ω	V _P kV _{AC}	Ordering code
RM 8	80	5,48 ± 10 %	28	22	880	2,5	4,0	B78388-P1256-A5