


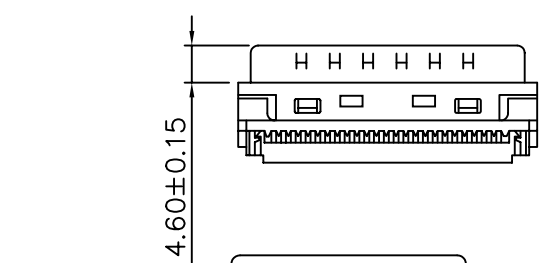
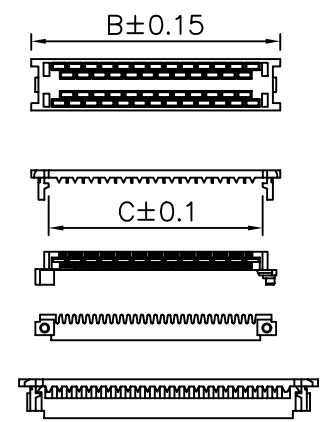



SPECIFICATION

Current Rating: 1A
 Insulation Resistance : 500 Megohms/Min.
 Withstanding Voltage : 500V AC/RMS For 1 Minute
 Contact Resistance : 35 Milliohms Max.
 Temperature Range : -55°C To +105°C
 Housing And Cover : Plastic Thermoplastic
 P.B.T UL 94V-0
 Contact: Phosphor Bronze Gold Selective Plated
 Shell : Steel, Nickel Plated Over Copper
 Back Shell: Zinc Plated Nickel Over Copper
 Spring Latches : Phosphor Bronze Over Nickel
 Screw : Steel Nickel Plated Over Copper
 Cable Clipper: Steel Nickel Plated

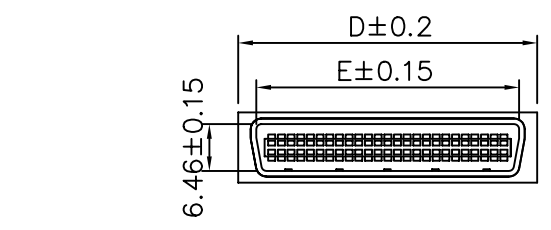

| Circuits | A | B | C | D | E | F | G | H | I | J | K | L |
|----------|-------|-------|-------|-------|-------|------|-------|-------|-------|-------|-------|-------|
| 50 | 37.30 | 39.30 | 34.10 | 39.30 | 35.60 | 9.30 | 13.70 | 40.50 | 40.54 | 50.50 | 10.71 | 12.65 |
| 68 | 48.73 | 50.70 | 45.50 | 50.60 | 46.95 | 9.30 | 13.60 | 51.30 | 51.50 | 61.60 | 10.70 | 12.50 |

AUK A NUMBER OF AUK GROUP
太聯事業股份有限公司
 AUK CONTRACTORS CO., LTD.

DRAWING No.
 HPC026PFW

APPROVED BY MEI
 CHECKED BY RAN
 DRAWING BY HZF

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 .XXX

SCALE NONE REV. A UNIT mm

| AREA | REVISIONS | CHK | DATE |
|------|-----------|-----|------|
| | | | |