


SPECIFICATIONS

Current rating: 3 amps
 Contact material: Brass
 Contact plating: Gold Flash, STD
 Contact resistance: 20 milliohms max.
 Insulator material: Polyester, UL94V-0
 Insulator resistance: 1,000 megohms min.
 Withstanding: 600VAC
 Operating temperature: -40°C to +105°C

Recommended P.C. Board Hole Layout

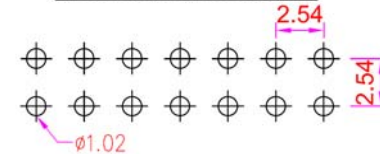

Series	Rows	Positions	Plating	Profile (H) / Tail (A)
EARS	XX	XX	XX	XX
Elevated receptacle strip	01=1 row 02=2 rows	02-40 1 row 04-80 2 rows	TN=Tin GDXX=Gold XX=Flash if blank, 10, 15, 30u"	1W=11.05/2.5 3W=16.13/3.50 1Y=11.05/7.35 3Y=16.13/2.3 1Z=11.05/12.2 3Z=16.13/7.1 2Y=13.59/4.85 4W=17.62/5.64 2Z=13.59/9.65 4Z=18.67/4.6

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
					UNIT: mm	

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **EARS-02-XX-XX-XX**

Description: Elevated receptacle strip