

4N22A, 4N23A, 4N24A
OPTOCOUPLED


D3055, AUGUST 1987

T-41-83

JEDEC REGISTERED DEVICES
GALLIUM ARSENIDE DIODE INFRARED SOURCE OPTICALLY COUPLED
TO A HIGH-GAIN N-P-N SILICON PHOTOTRANSISTOR

- Both Input and Output Circuits Are Isolated from the Can
- JAN, JAN TX, JAN TXV Versions Available
- High Overall Current Gain . . . 1.5 Typ (4N24A)
- High-Gain, High-Voltage Transistor . . . $h_{FE} = 700$ Typ (4N24A),
 $V_{(BR)CEO} = 35$ V Min
- High-Voltage Electrical Isolation . . . 1-kV Rating
- Stable over Wide Temperature Range

*mechanical data

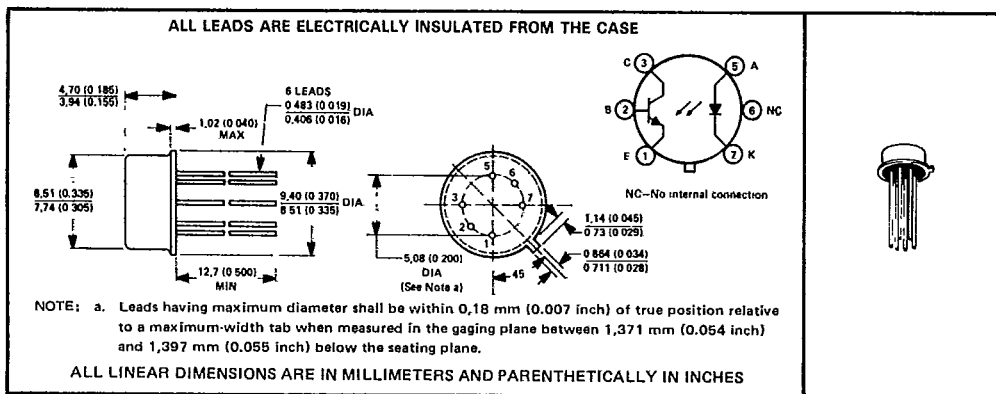

3

Optocouplers (Isolators)

*absolute maximum ratings at 25°C free-air temperature (unless otherwise noted)

Input-to-output voltage	± 1 kV
Collector-base voltage	35 V
Collector-emitter voltage	35 V
Emitter-base voltage	4 V
Input diode reverse voltage	2 V
Input diode continuous forward current at (or below) 65°C free-air temperature (see Note 1)	40 mA
Continuous collector current	50 mA
Peak diode current (see Note 2)	1 A
Continuous transistor power dissipation at (or below) 25°C free-air temperature (see Note 3)	300 mW
Operating free-air temperature range	-55°C to 125°C
Storage temperature range	-55°C to 125°C
Lead temperature 1.6 mm (1/16 inch) from case for 10 seconds	240°C

* JEDEC registered data. This data sheet contains all applicable JEDEC registered data in effect at the time of publication.

- NOTES: 1. Derate linearly to 125°C free-air temperature at the rate of 0.67 mA/°C.
2. This value applies for $t_W \leq 1 \mu s$, PRR ≤ 300 pps.
3. Derate linearly to 125°C free-air temperature at the rate of 3 mW/°C.

PRODUCTION DATA documents contain information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

TEXAS INSTRUMENTS
POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 1987, Texas Instruments Incorporated

**4N22A, 4N23A, 4N24A
OPTOCOUPERS**

T-41-83

***electrical characteristics at 25°C free-air temperature (unless otherwise noted)**

PARAMETER	TEST CONDITIONS	4N22A		4N23A		4N24A		UNIT
		MIN	TYP MAX	MIN	TYP MAX	MIN	TYP MAX	
$V_{(BR)CBO}$ Collector-base breakdown voltage	$I_C = 100 \mu A, I_E = 0, I_F = 0$	35		35		35		V
$V_{(BR)CEO}$ Collector-emitter breakdown voltage	$I_C = 1 mA, I_B = 0, I_F = 0$	35		35		35		V
$V_{(BR)EBO}$ Emitter-base breakdown voltage	$I_E = 100 \mu A, I_C = 0, I_F = 0$	4		4		4		V
I_R Input diode static reverse current	$V_R = 2 V$	100		100		100		μA
$I_{C(on)}$ On-state collector current	$V_{CE} = 5 V, I_B = 0, I_F = 2 mA$	0.15		0.2		0.4		mA
	$V_{CE} = 5 V, I_B = 0, I_F = 10 mA, T_A = -55^\circ C$	1		2.5		4		
	$V_{CE} = 5 V, I_B = 0, I_F = 10 mA$	2.5 4		6 8		10 15		
	$V_{CE} = 5 V, I_B = 0, I_F = 10 mA, T_A = 100^\circ C$	1		2.5		4		
$I_{C(off)}$ Off-state collector current	$V_{CE} = 20 V, I_B = 0, I_F = 0$	100		100		100		nA
	$V_{CE} = 20 V, I_B = 0, I_F = 0, T_A = 100^\circ C$	100		100		100		μA
V_F Input diode static forward voltage	$I_F = 10 mA, T_A = -55^\circ C$	1 1.5		1 1.5		1 1.5		V
	$I_F = 10 mA$	0.8 1.3		0.8 1.3		0.8 1.3		
	$I_F = 10 mA, T_A = 100^\circ C$	0.7 1.2		0.7 1.2		0.7 1.2		
$V_{CE(sat)}$ Collector-emitter saturation voltage	$I_C = 2.5 mA, I_B = 0, I_F = 20 mA$	0.3						V
	$I_C = 5 mA, I_B = 0, I_F = 20 mA$			0.3				
	$I_C = 10 mA, I_B = 0, I_F = 20 mA$					0.3		
	$I_C = 10 mA, I_B = 0, I_F = 20 mA$							
r_{iO} Input-to-output internal resistance	$V_{in-out} = \pm 1 kV, \text{ See Note 4}$	10^{11}		10^{11}		10^{11}		Ω
C_{iO} Input-to-output capacitance	$V_{in-out} = 0, f = 1 MHz, \text{ See Note 4}$	5		5		5		pF

***switching characteristics at 25°C free-air temperature**


PARAMETER	TEST CONDITIONS	4N22A		4N23A		4N24A		UNIT
		MIN	TYP MAX	MIN	TYP MAX	MIN	TYP MAX	
t_r Rise time	$V_{CC} = 10 V, I_{F(on)} = 10 mA,$	15		15		20		μs
t_f Fall time	$R_L = 100 \Omega, \text{ See Figure 1}$	15		15		20		μs

NOTE 4: These parameters are measured between all the input diode leads shorted together and all the phototransistor leads shorted together.
* JEDEC registered data

3 Optocouplers (Isolators)


4N22A, 4N23A, 4N24A
OPTOCOUPERS
T-41-83

*PARAMETER MEASUREMENT INFORMATION

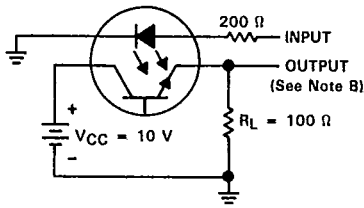

TEST CIRCUIT

Adjust amplitude of input pulse for $I_{F(on)} = 10 \text{ mA}$

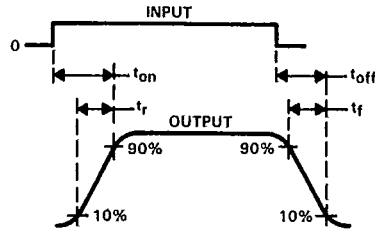

VOLTAGE WAVEFORMS

NOTES: A. The input waveform is supplied by a generator with the following characteristics: $Z_{out} = 50 \Omega$, $t_r \leq 15 \text{ ns}$, $t_w = 100 \mu\text{s}$, duty cycle = 1%.
B. Waveforms are monitored on an oscilloscope with the following characteristics: $t_r \leq 12 \text{ ns}$, $R_{in} \geq 1 \text{ M}\Omega$, $C_{in} \leq 20 \text{ pF}$.
* JEDEC registered data

TYPICAL CHARACTERISTICS

3

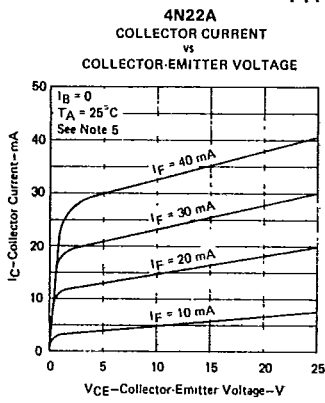


FIGURE 2

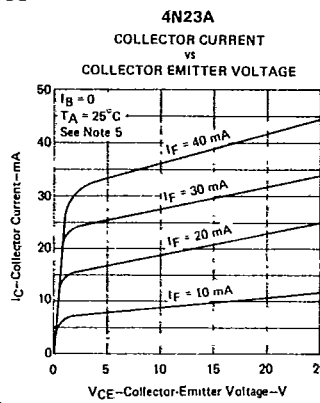


FIGURE 3

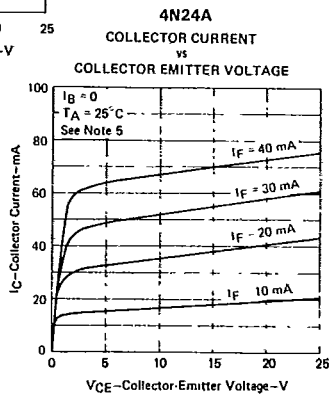


FIGURE 4

NOTE 5: This parameter was measured using pulse techniques, $t_w = 100 \mu\text{s}$, duty cycle = 1%.

Optocouplers (Isolators)

4N22A, 4N23A, 4N24A
OPTOCOUPLEDERS

T-41-83

TYPICAL CHARACTERISTICS

INPUT DIODE FORWARD CONDUCTION CHARACTERISTICS


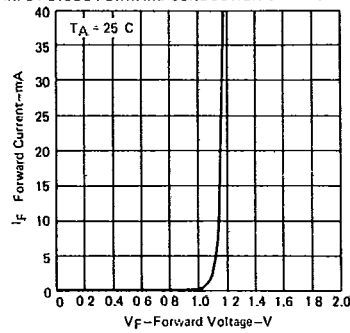


FIGURE 5

NORMALIZED ON-STATE COLLECTOR CURRENT[†] vs FREE AIR TEMPERATURE

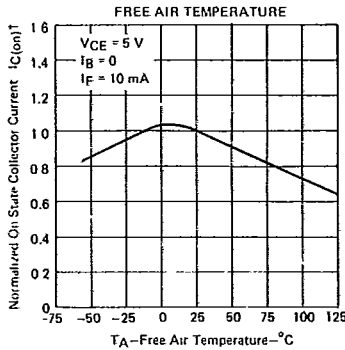

[†] Normalized to value at T_A = 25°C

FIGURE 6

PHOTOTRANSISTOR COLLECTOR CURRENT vs INPUT DIODE FORWARD CURRENT

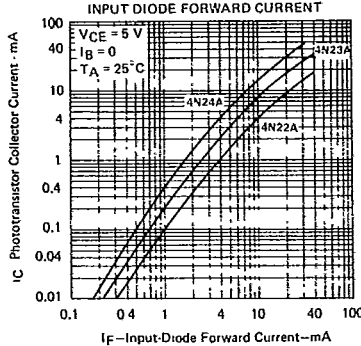


FIGURE 7

OFF-STATE COLLECTOR CURRENT vs FREE-AIR TEMPERATURE

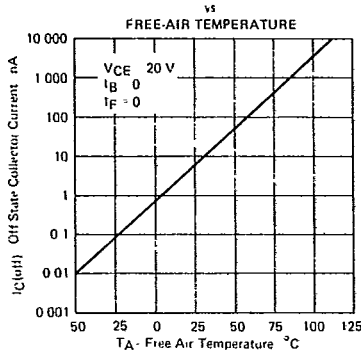


FIGURE 8

AVERAGE SWITCHING TIME vs LOAD RESISTANCE

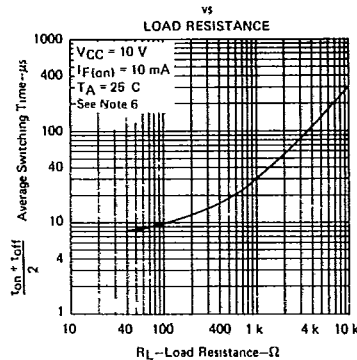


FIGURE 9

NOTE 6: This parameter was measured in the test circuit of Figure 1 with R_L varied between 40 Ω and 10 kΩ.

3

Optocouplers (Isolators)