

# Coaxial Frequency Mixer

Level 17 (LO Power +17 dBm) 5 to 1200 MHz

## ZFM-4H+



Generic photo used for illustration purposes only

CASE STYLE: K18

Connectors	Model
BNC	ZFM-4H+
SMA	ZFM-4H-S+
BRACKET (OPTION "B")	

**+RoHS Compliant**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

### Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power	200mW
IF Current	40mA
Permanent damage may occur if any of these limits are exceeded.	

### Coaxial Connections

LO	1
RF	2
IF	3


### Features

- low conversion loss, 4.97 dB typ.
- good L-R isolation, 35 dB typ, L-I, 35 dB typ.
- wideband, 5 to 1200 MHz
- rugged shielded case

### Applications

- VHF/UHF
- cellular
- instrumentation
- GPS
- federal & defense communications

### Outline Drawing

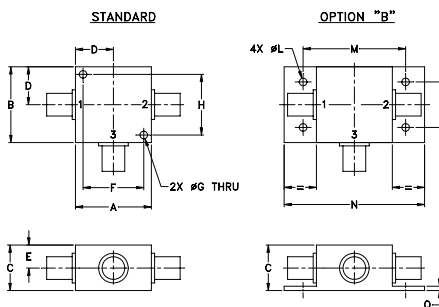

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H
1.25	1.25	.75	.63	.38	1.00	.125	1.000
31.75	31.75	19.05	16.00	9.65	25.40	3.18	25.40
J	K	L	M	N	P	Q	wt
--	--	.125	1.688	2.18	.75	.07	grams
--	--	3.18	42.88	55.37	19.05	1.78	70.0

### Electrical Specifications

FREQUENCY (MHz)		CONVERSION LOSS (dB)				LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)								
LO/RF	IF	Mid-Band		Total	L			M			U						
$f_L-f_U$		$\bar{X}$	$\sigma$	Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.			
5-1200	DC-1200	6.59	0.03	8.0	9.0	50	40	35	25	30	20	50	40	35	20	30	20

1 dB COMP.: +14 dBm typ.


For phase detection: DC output has positive with in-phase LO and RF signals

L = low range [ $f_L$  to  $10 f_L$ ] M = mid range [ $10 f_L$  to  $f_U/2$ ] U = upper range [ $f_U/2$  to  $f_U$ ]  
m = mid band [ $2f_L$  to  $f_U/2$ ]

### Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm
10.1	40.1	7.31	68.49	65.02	1.44	1.65
30.1	60.1	7.41	62.74	61.70	1.48	1.58
70.1	100.1	7.27	58.08	57.43	1.53	1.52
130.1	160.1	7.26	54.30	54.15	1.46	1.56
210.1	240.1	7.09	50.37	51.33	1.49	1.57
270.1	300.1	6.90	48.42	49.71	1.51	1.54
330.1	360.1	6.95	46.73	48.36	1.48	1.56
390.1	420.1	6.72	45.73	46.94	1.45	1.58
470.1	500.1	6.58	44.28	44.09	1.41	1.62
570.1	600.1	6.71	43.16	42.65	1.41	1.68
650.1	680.1	6.76	42.76	41.88	1.38	1.74
710.1	740.1	6.88	42.70	41.40	1.34	1.80
770.1	800.1	6.86	42.34	40.92	1.32	1.83
830.1	860.1	7.03	41.64	40.87	1.33	1.85
890.1	920.1	7.28	40.53	40.72	1.34	1.88
950.1	980.1	7.44	39.87	40.58	1.40	1.91
1010.1	1040.1	7.57	39.31	41.31	1.44	1.95
1090.1	1120.1	7.55	38.73	41.13	1.47	2.01
1170.1	1200.1	7.88	37.96	41.66	1.57	2.10
1210.1	1240.1	8.21	37.28	41.74	1.65	2.11

### Electrical Schematic

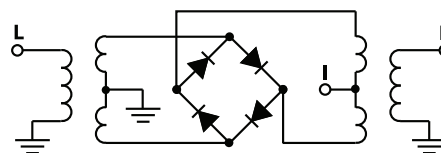







### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

**Mini-Circuits**

[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. E  
M170832  
ZFM-4H+  
DJ/TD/CP/AM  
190304  
Page 1 of 2

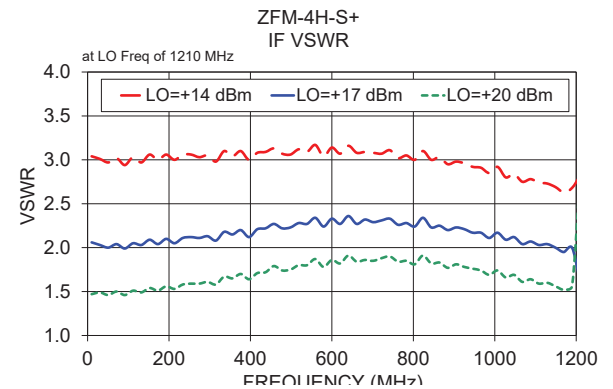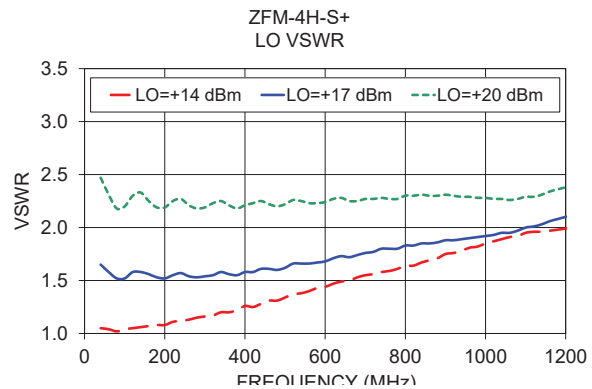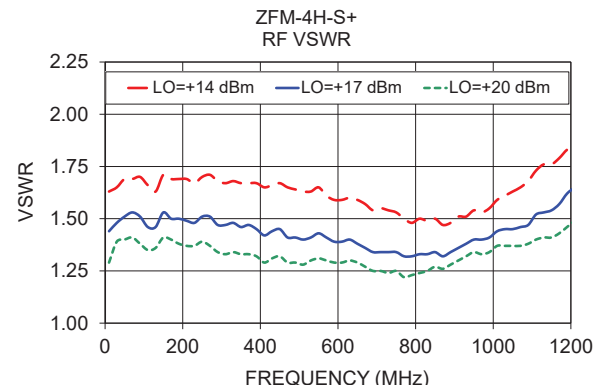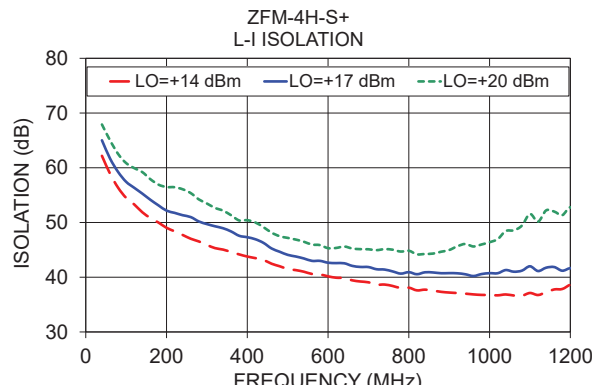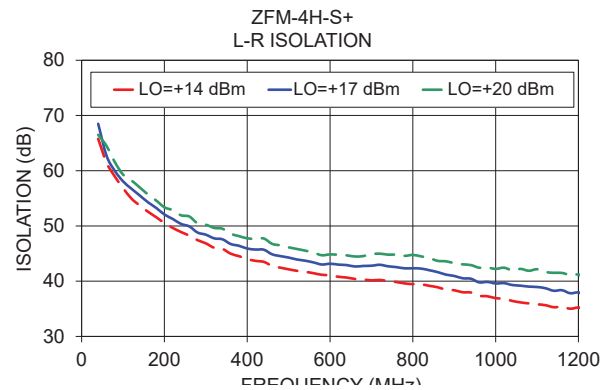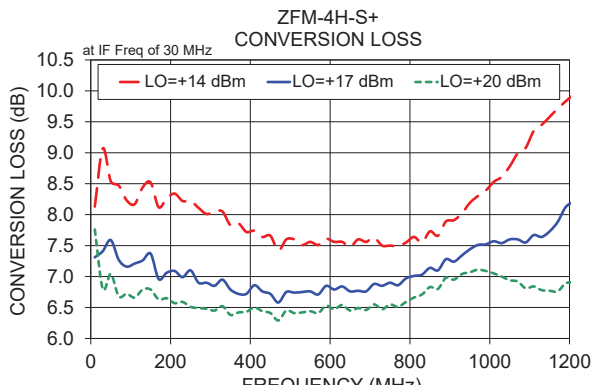

**Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Frequency Mixer

# ZFM-4H+

## Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB)			RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)			RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+14dBm (dB)		
		@LO (dBm)					@LO (dBm)					@LO (dBm)		
		+14	+17	+20			+14	+17	+20			+14	+17	+20
10.1	40.1	7.82	6.58	6.18	10.1	40.1	23.70	28.32	31.93	10.1	40.1	0.37	0.12	0.10
49.9	79.9	8.37	7.26	6.75	49.9	79.9	24.71	28.33	31.68	50.8	80.8	0.28	0.06	0.03
89.6	119.6	8.16	7.02	6.55	89.6	119.6	23.52	27.49	30.74	91.5	121.5	0.22	0.10	0.07
129.4	159.4	8.18	7.09	6.62	129.4	159.4	25.67	27.94	30.58	132.3	162.3	0.23	0.04	0.03
169.2	199.2	7.97	6.92	6.47	169.2	199.2	25.70	27.77	26.77	173.0	203.0	0.42	0.16	0.11
208.9	238.9	8.14	6.95	6.43	208.9	238.9	23.73	27.03	26.93	213.7	243.7	0.30	0.10	0.06
248.7	278.7	8.03	6.91	6.43	248.7	278.7	23.44	25.35	28.14	254.4	284.4	0.25	0.08	0.07
288.5	318.5	7.85	6.70	6.32	288.5	318.5	23.84	25.78	34.06	295.2	325.2	0.34	0.20	0.09
328.2	358.2	7.91	6.80	6.40	328.2	358.2	22.97	25.10	30.33	335.9	365.9	0.39	0.16	0.06
368.0	398.0	7.53	6.59	6.27	368.0	398.0	24.23	27.25	28.17	376.6	406.6	0.60	0.24	0.11
407.7	437.7	7.54	6.59	6.29	407.7	437.7	23.10	28.98	29.25	417.3	447.3	0.54	0.19	0.08
447.5	477.5	7.50	6.56	6.26	447.5	477.5	22.76	28.67	27.45	458.1	488.1	0.76	0.27	0.13
487.3	517.3	7.37	6.54	6.26	487.3	517.3	24.68	25.90	26.16	498.8	528.8	0.72	0.22	0.10
527.0	557.0	7.36	6.60	6.29	527.0	557.0	25.86	24.05	25.86	539.5	569.5	0.72	0.19	0.10
566.8	596.8	7.27	6.57	6.25	566.8	596.8	25.85	23.85	25.85	580.2	610.2	0.70	0.17	0.08
606.6	636.6	7.34	6.62	6.32	606.6	636.6	26.02	24.50	27.04	620.9	650.9	0.68	0.14	0.06
646.3	676.3	7.32	6.59	6.31	646.3	676.3	25.29	26.20	28.72	661.7	691.7	0.72	0.17	0.08
686.1	716.1	7.37	6.62	6.31	686.1	716.1	24.84	27.84	31.85	702.4	732.4	0.59	0.13	0.06
725.9	755.9	7.26	6.60	6.27	725.9	755.9	25.77	27.71	30.50	743.1	773.1	0.77	0.19	0.15
765.6	795.6	7.26	6.64	6.30	765.6	795.6	26.71	25.64	34.40	783.8	813.8	0.80	0.19	0.15
805.4	835.4	7.39	6.81	6.47	805.4	835.4	23.69	23.63	25.29	824.6	854.6	0.92	0.24	0.16
845.2	875.2	7.41	6.87	6.58	845.2	875.2	21.74	22.61	24.00	865.3	895.3	0.92	0.28	0.15
884.9	914.9	7.57	7.00	6.71	884.9	914.9	20.04	21.16	23.04	906.0	936.0	0.97	0.31	0.10
924.7	954.7	7.70	7.07	6.79	924.7	954.7	18.86	20.65	22.28	946.7	976.7	0.83	0.33	0.14
964.5	994.5	7.96	7.19	6.85	964.5	994.5	17.94	20.61	22.38	987.4	1017.4	0.74	0.32	0.17
1004.2	1034.2	8.21	7.31	6.85	1004.2	1034.2	17.26	20.91	23.47	1028.2	1058.2	0.67	0.41	0.27
1044.0	1074.0	8.50	7.37	6.79	1044.0	1074.0	16.71	21.57	25.06	1068.9	1098.9	0.46	0.49	0.38
1103.6	1133.6	8.92	7.36	6.62	1103.6	1133.6	15.26	23.22	28.75	1109.6	1139.6	0.27	0.57	0.49
1143.4	1173.4	9.22	7.50	6.60	1143.4	1173.4	14.43	21.12	35.57	1150.3	1180.3	0.08	0.53	0.56
1203.0	1233.0	9.57	7.90	6.72	1203.0	1233.0	14.26	17.71	29.12	1191.1	1221.1	-0.02	0.39	0.60
1242.8	1272.8	9.66	8.03	6.85	1242.8	1272.8	14.54	17.56	23.80	1231.8	1261.8	-0.12	0.30	0.53
1302.5	1332.5	9.97	8.55	7.08	1302.5	1332.5	14.69	16.64	22.36	1292.9	1322.9	-0.17	0.09	0.48
1342.2	1372.2	9.85	8.68	7.17	1342.2	1372.2	15.39	16.43	23.20	1333.6	1363.6	-0.24	-0.08	0.44
1401.9	1431.9	9.98	9.00	7.66	1401.9	1431.9	16.87	16.83	20.55	1394.7	1424.7	-0.04	-0.17	0.28
1441.6	1471.6	9.81	8.94	7.81	1441.6	1471.6	17.57	17.52	19.88	1435.4	1465.4	-0.03	-0.17	0.14
1501.3	1531.3	9.85	9.09	8.29	1501.3	1531.3	18.51	18.09	18.54	1496.5	1526.5	0.04	-0.18	-0.13
1541.0	1571.0	9.67	8.92	8.28	1541.0	1571.0	18.64	18.23	18.32	1537.2	1567.2	0.29	0.10	0.04
1600.7	1630.7	9.90	9.10	8.53	1600.7	1630.7	18.46	18.38	18.35	1598.3	1628.3	0.15	0.10	0.03
1640.5	1670.5	9.76	8.99	8.45	1640.5	1670.5	18.21	17.92	18.26	1639.0	1669.0	0.33	0.28	0.21
1700.1	1730.1	9.93	9.02	8.47	1700.1	1730.1	18.08	18.22	18.66	1700.1	1730.1	0.35	0.38	0.31

# Frequency Mixer

# ZFM-4H+

## Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=610.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=10.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=1210.1MHz (dB)
		@LO (dBm)			@LO (dBm)			@LO (dBm)
		+17			+17			+17
600.0	10.1	7.43	10.0	20.1	7.48	1200.0	10.1	8.11
584.9	25.2	7.24	70.5	80.6	7.41	1159.7	50.4	7.89
569.7	40.4	7.12	131.1	141.2	7.14	1119.3	90.8	7.88
554.6	55.5	7.27	191.6	201.7	7.28	1099.2	110.9	7.64
539.5	70.6	7.33	252.1	262.2	7.32	1058.8	151.3	7.47
524.4	85.7	7.26	312.7	322.8	7.34	1038.6	171.5	7.37
509.2	100.9	7.21	373.2	383.3	7.50	998.3	211.8	7.23
494.1	116.0	7.08	433.7	443.8	7.62	978.1	232.0	7.12
479.0	131.1	7.01	494.2	504.3	7.57	937.8	272.3	7.12
463.8	146.3	7.05	554.8	564.9	7.66	917.6	292.5	7.01
448.7	161.4	7.03	615.3	625.4	7.66	877.3	332.8	7.04
433.6	176.5	7.00	675.8	685.9	7.85	857.1	353.0	7.03
418.5	191.6	6.91	736.4	746.5	7.97	816.8	393.3	7.01
403.3	206.8	6.98	796.9	807.0	8.06	796.6	413.5	7.05
388.2	221.9	6.85	857.4	867.5	8.23	756.3	453.8	7.04
373.1	237.0	6.78	918.0	928.1	8.09	736.1	474.0	7.01
357.9	252.2	6.77	978.5	988.6	8.00	695.8	514.3	7.09
342.8	267.3	6.73	1039.0	1049.1	7.80	675.6	534.5	7.10
327.7	282.4	6.75	1099.6	1109.7	7.71	635.3	574.8	7.14
312.6	297.5	6.76	1160.1	1170.2	7.68	615.1	595.0	7.19
297.4	312.7	6.68	1220.6	1230.7	7.75	574.7	635.4	7.25
282.3	327.8	6.61	1281.2	1291.3	7.89	554.6	655.5	7.31
267.2	342.9	6.57	1341.7	1351.8	7.90	514.2	695.9	7.40
252.1	358.0	6.62	1402.2	1412.3	8.01	494.1	716.0	7.37
236.9	373.2	6.69	1462.7	1472.8	7.79	453.7	756.4	7.43
221.8	388.3	6.76	1523.3	1533.4	7.66	433.6	776.5	7.49
206.7	403.4	6.74	1583.8	1593.9	7.63	393.2	816.9	7.59
191.5	418.6	6.65	1644.3	1654.4	7.82	373.1	837.0	7.68
176.4	433.7	6.66	1704.9	1715.0	7.99	332.7	877.4	7.81
161.3	448.8	6.79	1765.4	1775.5	8.02	312.5	897.6	7.90
146.2	463.9	6.80	1825.9	1836.0	8.17	272.2	937.9	7.92
131.0	479.1	6.74	1886.5	1896.6	8.48	252.0	958.1	7.95
115.9	494.2	6.81	1926.8	1936.9	8.65	211.7	998.4	8.02
100.8	509.3	6.95	1987.3	1997.4	8.97	191.5	1018.6	7.94
85.6	524.5	6.96	2027.7	2037.8	9.23	151.2	1058.9	7.95
70.5	539.6	7.14	2088.2	2098.3	9.71	131.0	1079.1	7.87
55.4	554.7	6.96	2128.6	2138.7	9.97	90.7	1119.4	7.81
40.3	569.8	6.92	2189.1	2199.2	10.58	70.5	1139.6	8.07
25.1	585.0	7.18	2229.5	2239.6	10.88	30.2	1179.9	7.57
10.0	600.1	7.36	2290.0	2300.1	11.39	10.0	1200.1	8.36

# Frequency Mixer

# ZFM-4H+

## Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)			RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)					@LO (dBm)		
	+14	+17	+20	+14	+17	+20			+14	+17	+20
40.1	62.85	64.05	64.43	61.10	62.46	63.36	10.1	40.1	54.85	54.08	53.80
79.9	57.53	58.55	59.26	55.82	57.81	59.61	49.9	79.9	41.64	42.03	42.22
119.6	54.10	55.33	56.23	52.75	55.11	57.41	89.6	119.6	36.78	37.27	37.64
159.4	51.80	52.97	53.97	50.48	53.02	55.67	129.4	159.4	34.11	34.64	35.12
199.2	49.81	50.88	51.93	48.73	51.29	54.48	169.2	199.2	32.33	33.14	33.68
238.9	48.09	49.17	50.24	47.46	50.37	53.84	208.9	238.9	31.05	32.01	32.64
278.7	46.80	47.93	49.22	46.24	49.43	52.69	248.7	278.7	30.21	31.17	31.70
318.5	45.54	46.83	48.11	45.10	48.50	51.16	288.5	318.5	29.61	30.47	31.08
358.2	44.53	45.88	47.04	44.37	47.70	50.11	328.2	358.2	29.25	30.00	30.37
398.0	43.52	45.13	46.40	43.51	46.47	48.76	368.0	398.0	28.85	29.96	30.60
437.7	42.80	44.43	45.72	42.84	45.62	47.96	407.7	437.7	28.66	29.92	30.91
477.5	41.94	43.49	44.84	42.02	44.38	46.60	447.5	477.5	28.28	29.57	31.05
517.3	41.37	42.83	43.97	41.00	43.14	45.64	487.3	517.3	28.21	29.91	31.53
557.0	40.89	42.22	43.26	40.52	42.49	44.85	527.0	557.0	27.97	29.53	30.58
596.8	40.53	42.02	42.96	40.22	42.47	44.62	566.8	596.8	27.51	28.52	29.03
636.6	40.18	41.77	42.80	39.76	42.03	44.36	606.6	636.6	26.98	27.60	27.92
676.3	39.82	41.68	42.80	39.22	41.58	44.14	646.3	676.3	26.21	26.85	27.37
716.1	39.65	41.49	42.87	38.90	41.34	44.12	686.1	716.1	25.36	25.99	26.54
755.9	39.39	41.31	42.84	38.58	40.89	43.98	725.9	755.9	24.48	24.90	25.15
795.6	39.05	41.05	42.65	38.13	40.52	43.72	765.6	795.6	23.67	23.80	23.67
835.4	38.81	40.84	42.33	37.99	40.86	43.50	805.4	835.4	22.83	22.64	22.32
875.2	38.30	40.36	41.94	37.80	40.91	43.90	845.2	875.2	21.92	21.54	21.22
914.9	37.80	39.61	41.32	37.28	40.50	44.32	884.9	914.9	21.01	20.36	19.95
954.7	37.26	39.04	40.85	37.01	39.98	44.22	924.7	954.7	20.16	19.44	19.00
994.5	36.76	38.68	40.59	37.24	40.76	45.01	964.5	994.5	19.56	18.71	18.18
1034.2	36.40	38.63	40.57	37.21	41.01	45.97	1004.2	1034.2	19.13	18.13	17.59
1074.0	35.87	38.28	40.37	37.05	41.34	47.39	1044.0	1074.0	18.74	17.61	17.04
1133.6	35.58	38.03	40.31	37.74	41.77	48.58	1103.6	1133.6	18.44	17.23	16.72
1173.4	35.31	37.61	40.01	38.36	41.33	49.26	1143.4	1173.4	18.01	17.12	16.59
1233.0	35.15	37.22	39.83	39.86	41.96	49.93	1203.0	1233.0	17.89	17.45	17.07
1272.8	35.04	36.97	39.61	40.74	43.02	49.98	1242.8	1272.8	17.70	17.45	17.23
1332.5	34.87	36.85	38.58	43.15	47.07	53.63	1302.5	1332.5	17.51	17.35	17.22
1372.2	34.32	36.31	37.85	43.63	50.29	55.68	1342.2	1372.2	17.37	17.30	17.11
1431.9	31.46	32.97	34.53	33.25	36.22	38.69	1401.9	1431.9	17.07	17.04	16.70
1471.6	32.39	34.15	36.01	32.84	35.72	39.04	1441.6	1471.6	17.72	17.72	17.41
1531.3	33.17	35.05	36.47	34.13	38.00	41.75	1501.3	1531.3	17.33	17.45	17.23
1571.0	33.36	35.03	36.41	34.33	38.47	41.93	1541.0	1571.0	16.85	16.91	16.67
1630.7	33.49	34.70	35.95	33.69	38.22	41.93	1600.7	1630.7	16.01	16.02	15.69
1670.5	33.53	34.38	35.29	33.26	37.86	41.02	1640.5	1670.5	15.40	15.25	14.84
1730.1	33.96	34.46	35.07	31.99	36.74	40.18	1700.1	1730.1	14.55	14.15	13.53

# Frequency Mixer

# ZFM-4H+

## Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)			LO (MHz)	LO VSWR (:1)			IF (OUT) (MHz)	IF VSWR @LO=1210MHz (:1)		
		@LO (dBm)				@LO (dBm)				@LO (dBm)		
		+14	+17	+20		+14	+17	+20		+14	+17	+20
10.1	40.1	1.67	1.49	1.38	40.1	1.04	1.62	2.39	10.0	3.02	2.08	1.52
49.9	79.9	1.70	1.52	1.41	79.9	1.03	1.52	2.18	50.3	3.02	2.08	1.54
89.6	119.6	1.70	1.52	1.41	119.6	1.05	1.56	2.26	90.7	3.00	2.06	1.53
129.4	159.4	1.68	1.49	1.39	159.4	1.07	1.55	2.24	110.8	3.09	2.13	1.58
169.2	199.2	1.68	1.50	1.40	199.2	1.08	1.51	2.16	151.2	3.10	2.15	1.61
208.9	238.9	1.71	1.52	1.40	238.9	1.12	1.56	2.25	171.4	3.04	2.11	1.57
248.7	278.7	1.70	1.52	1.39	278.7	1.15	1.52	2.15	211.7	3.01	2.10	1.57
288.5	318.5	1.69	1.49	1.36	318.5	1.16	1.53	2.20	231.9	3.09	2.17	1.63
328.2	358.2	1.69	1.49	1.35	358.2	1.20	1.56	2.20	272.2	3.04	2.15	1.64
368.0	398.0	1.66	1.46	1.32	398.0	1.25	1.56	2.18	292.4	3.03	2.15	1.64
407.7	437.7	1.66	1.43	1.31	437.7	1.27	1.59	2.22	332.7	3.04	2.17	1.67
447.5	477.5	1.67	1.44	1.31	477.5	1.31	1.60	2.18	352.9	3.00	2.15	1.66
487.3	517.3	1.63	1.40	1.29	517.3	1.36	1.63	2.22	393.2	2.92	2.11	1.64
527.0	557.0	1.60	1.39	1.28	557.0	1.38	1.64	2.20	413.4	3.03	2.20	1.71
566.8	596.8	1.59	1.39	1.29	596.8	1.43	1.67	2.22	453.7	3.04	2.24	1.77
606.6	636.6	1.55	1.36	1.27	636.6	1.48	1.72	2.25	473.9	2.93	2.15	1.69
646.3	676.3	1.55	1.36	1.27	676.3	1.51	1.72	2.22	514.2	2.93	2.17	1.72
686.1	716.1	1.52	1.33	1.24	716.1	1.54	1.76	2.25	534.4	2.96	2.20	1.76
725.9	755.9	1.47	1.29	1.20	755.9	1.59	1.79	2.25	574.7	2.86	2.14	1.73
765.6	795.6	1.45	1.28	1.19	795.6	1.62	1.80	2.26	594.9	2.92	2.19	1.76
805.4	835.4	1.43	1.27	1.19	835.4	1.65	1.83	2.29	635.3	2.92	2.21	1.80
845.2	875.2	1.42	1.28	1.21	875.2	1.70	1.85	2.28	655.4	2.83	2.14	1.74
884.9	914.9	1.41	1.28	1.22	914.9	1.74	1.86	2.28	695.8	2.78	2.10	1.70
924.7	954.7	1.42	1.29	1.23	954.7	1.78	1.88	2.27	715.9	2.85	2.17	1.77
964.5	994.5	1.45	1.32	1.26	994.5	1.83	1.90	2.26	756.3	2.77	2.11	1.74
1004.2	1034.2	1.48	1.34	1.27	1034.2	1.87	1.92	2.25	776.4	2.72	2.07	1.69
1044.0	1074.0	1.52	1.37	1.28	1074.0	1.90	1.95	2.25	816.8	2.77	2.12	1.73
1103.6	1133.6	1.59	1.39	1.30	1133.6	1.94	2.01	2.28	836.9	2.67	2.03	1.68
1143.4	1173.4	1.65	1.44	1.32	1173.4	1.96	2.06	2.33	877.3	2.60	1.97	1.61
1203.0	1233.0	1.72	1.53	1.39	1233.0	1.98	2.09	2.37	897.5	2.66	2.03	1.66
1242.8	1272.8	1.76	1.58	1.45	1272.8	2.00	2.11	2.40	937.8	2.60	1.99	1.63
1302.5	1332.5	1.84	1.69	1.54	1332.5	2.03	2.10	2.39	958.0	2.54	1.92	1.56
1342.2	1372.2	1.87	1.75	1.58	1372.2	2.04	2.11	2.40	998.3	2.51	1.90	1.53
1401.9	1431.9	1.92	1.83	1.69	1431.9	2.06	2.07	2.35	1018.5	2.51	1.91	1.54
1441.6	1471.6	1.95	1.86	1.74	1471.6	2.07	2.07	2.35	1058.8	2.42	1.83	1.47
1501.3	1531.3	2.03	1.96	1.88	1531.3	2.14	2.07	2.32	1079.0	2.45	1.86	1.48
1541.0	1571.0	2.06	2.00	1.94	1571.0	2.14	2.06	2.30	1119.3	2.46	1.87	1.48
1600.7	1630.7	2.14	2.06	2.01	1630.7	2.19	2.05	2.26	1139.5	2.35	1.78	1.40
1640.5	1670.5	2.14	2.07	2.03	1670.5	2.18	2.03	2.23	1179.8	2.28	1.73	1.36
1700.1	1730.1	2.20	2.12	2.08	1730.1	2.22	2.02	2.19	1200.0	2.33	1.78	1.40

## Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	17	26	17	31	27	37	41	47	45	55
1	-	21	+0	37	16	45	43	32	37	34	36	36
2	64	57	61	59	60	70	54	66	62	78	64	68
3	>90	69	56	68	54	74	50	63	53	67	70	65
4	>90	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82
5	>90	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82
6	>90	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82
7	>90	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82
8	>90	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82
9	>90	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82
10	>90	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

### LO HARMONICS ORDER

Test conditions: RF IN: 610 MHz; -1.00 dBm.  
 LO IN: 640 MHz; +17.00 dBm  
 IF OUT: 30 MHz; -8.45 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	27	36	30	43	42	50	62	67	69	91
1	-	22	+0	34	16	40	33	36	44	38	45	44
2	44	53	56	55	52	75	47	59	54	65	61	73
3	71	57	41	55	44	55	35	52	42	52	55	53
4	>90	68	70	68	68	73	71	76	65	84	>92	76
5	>90	83	57	64	51	68	49	87	48	62	54	62
6	>90	89	85	81	88	77	85	84	77	76	74	80
7	>90	76	83	86	71	73	67	78	66	81	61	72
8	>90	>92	>92	>92	>92	>92	88	>92	86	87	>92	82
9	>90	>92	>92	>92	90	>92	78	85	75	91	76	87
10	>90	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

### LO HARMONICS ORDER

Test conditions: RF IN: 610 MHz; 9.00 dBm.  
 LO IN: 640 MHz; +17.00 dBm  
 IF OUT: 30 MHz; 1.64 dBm


- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.  
 2. + entry denotes harmonics are in (dBc) above IF OUTPUT.  
 3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

# Frequency Mixer


# ZFM-4H+

## Typical Performance Curves


Conversion Loss @ IF=30MHz

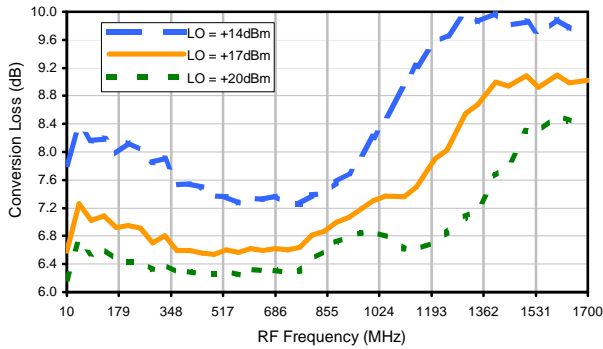


Conversion Loss vs. IF @ RF=610.1MHz

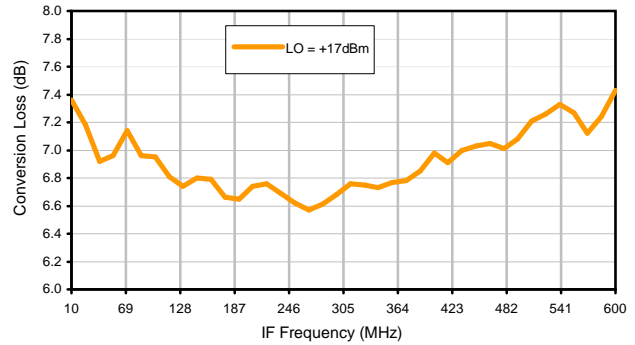


Conversion Loss vs. IF @ RF=10.1MHz

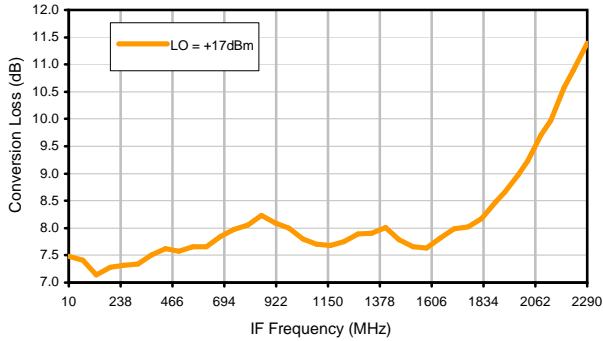


Conversion Loss vs. IF @ RF=1210.1MHz

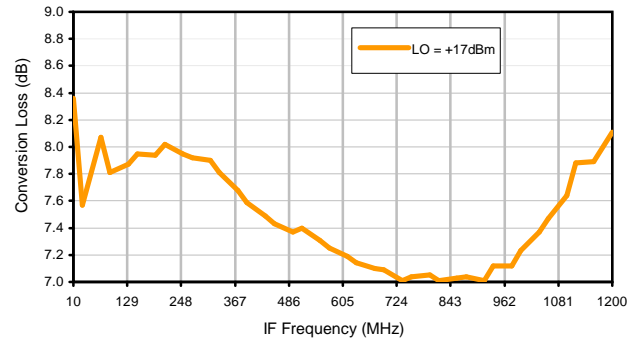

IP3 Input

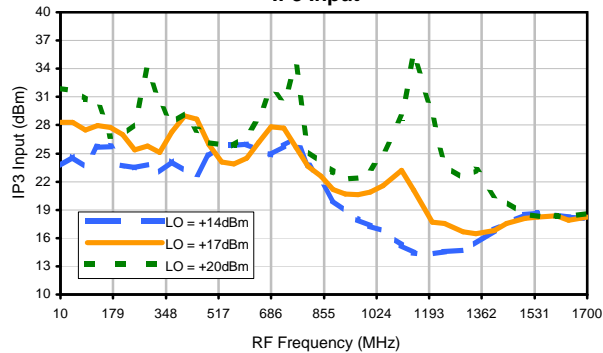


Compression @ RF IN=+14dBm

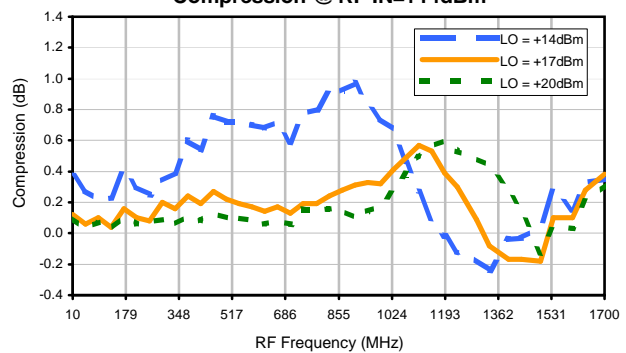


## Typical Performance Curves


LO-RF Isolation

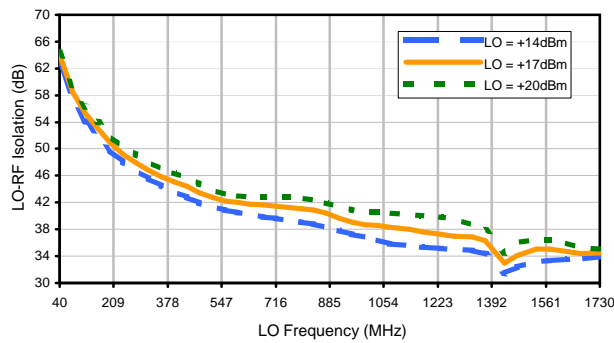


LO-IF Isolation

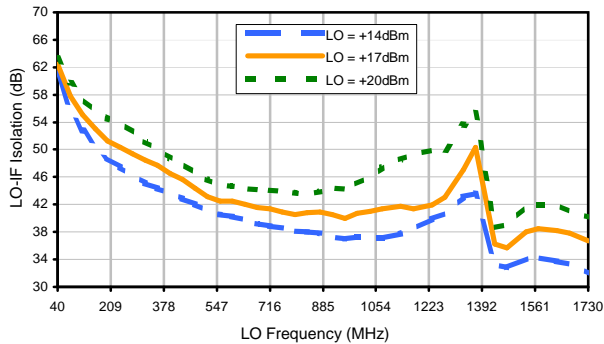


RF-IF Isolation

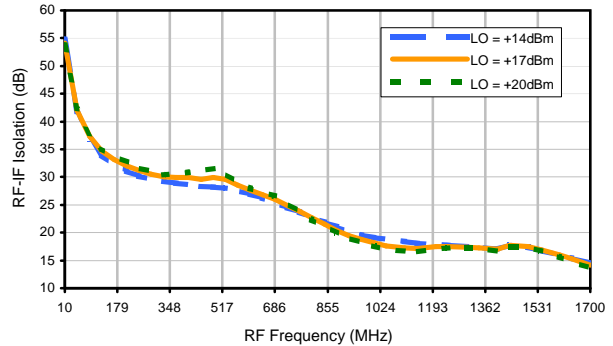


RF VSWR

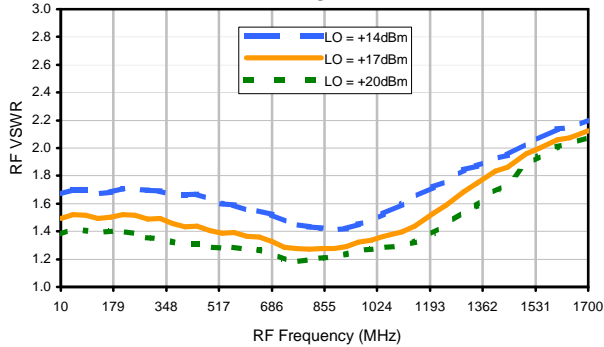

LO VSWR

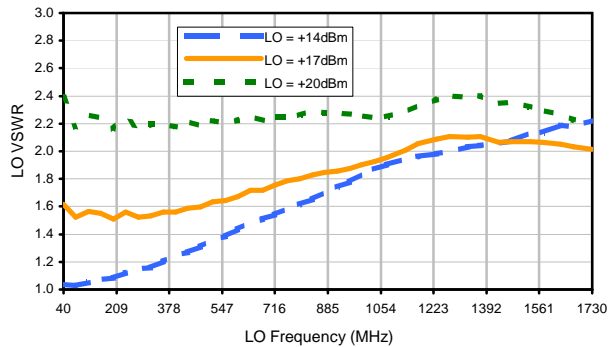

IF VSWR

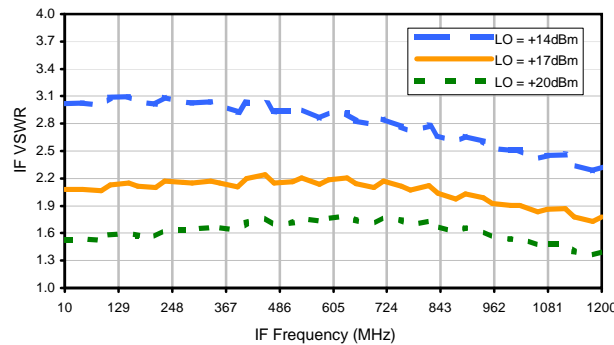

## Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	17	26	17	31	27	37	41	47	45	55
1	-	21	+0	37	16	45	43	32	37	34	36	36
2	64	57	61	59	60	70	54	66	62	78	64	68
3	>90	69	56	68	54	74	50	63	53	67	70	65
4	>90	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82
5	>90	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82
6	>90	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82
7	>90	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82
8	>90	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82
9	>90	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82
10	>90	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

### LO HARMONICS ORDER

Test conditions: RF IN: 610 MHz; -1.00 dBm.  
 LO IN: 640 MHz; +17.00 dBm  
 IF OUT: 30 MHz; -8.45 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	27	36	30	43	42	50	62	67	69	91
1	-	22	+0	34	16	40	33	36	44	38	45	44
2	44	53	56	55	52	75	47	59	54	65	61	73
3	71	57	41	55	44	55	35	52	42	52	55	53
4	>90	68	70	68	68	73	71	76	65	84	>92	76
5	>90	83	57	64	51	68	49	87	48	62	54	62
6	>90	89	85	81	88	77	85	84	77	76	74	80
7	>90	76	83	86	71	73	67	78	66	81	61	72
8	>90	>92	>92	>92	>92	>92	88	>92	86	87	>92	82
9	>90	>92	>92	>92	90	>92	78	85	75	91	76	87
10	>90	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

### LO HARMONICS ORDER

Test conditions: RF IN: 610 MHz; 9.00 dBm.  
 LO IN: 640 MHz; +17.00 dBm  
 IF OUT: 30 MHz; 1.64 dBm


- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.  
 2. + entry denotes harmonics are in (dBc) above IF OUTPUT.  
 3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

# Case Style

# K

## K18

### Outline Dimensions

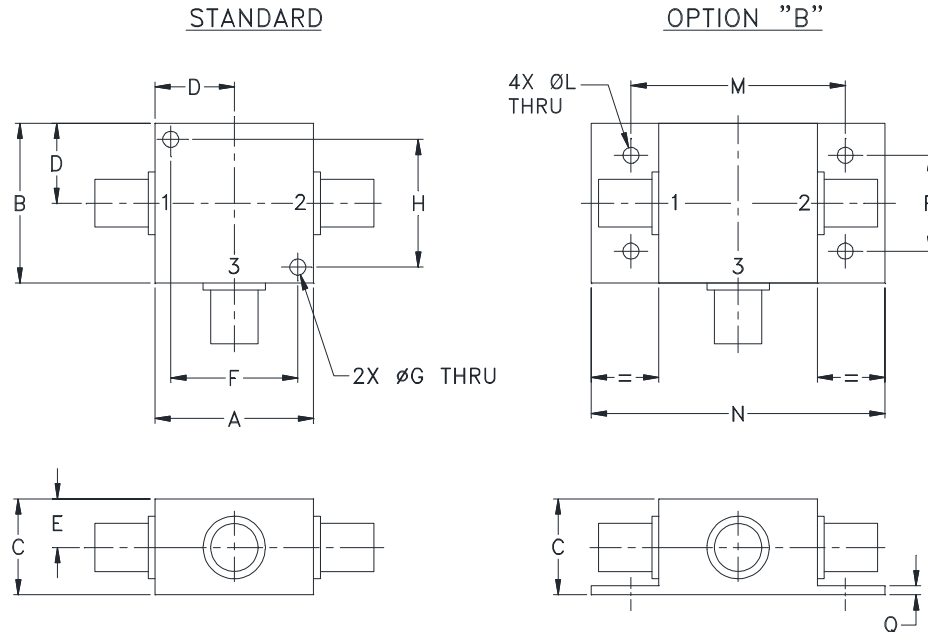

CASE#	A	B	C	D	E	F	G	H	J	K	L	M	N
K18	1.25 (31.75)	1.25 (31.75)	.75 (19.05)	.63 (16.00)	.38 (9.65)	1.000 (25.40)	.125 (3.18)	1.000 (25.40)	--	--	.125 (3.18)	1.688 (42.88)	2.18 (55.37)

CASE#	P	Q	WT. GRAMS
K18	.75 (19.05)	.07 (1.78)	70.0

Dimensions are in inches (mm). Tolerances: 2 Pl.  $\pm .03$ ; 3 Pl.  $\pm .015$

#### Notes:

- Case material: Aluminum alloy.
- Case finish:  
For RoHS Case Styles: Clear chemical conversion coating, non-chrome or trivalent chrome based.
- Mounting bracket available on request. Add suffix B to part number.
- For port marking 1, 2, and 3 see specifications data sheet.
- For bracket version, option B, dimension "C" changes from .75 to .94 inches when connectors are type N.
- Refer to the individual model data sheet for the type of connectors available.

**Mini-Circuits®**

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D
Humidity	90% RH, 65°C Units may require bake-out after humidity to restore full performance.	MIL-STD-202, Method 103
Thermal Shock	-65° to 125°C, 5 cycles	MIL-STD-202, Method 107, Condition B
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	100g, 6ms sawtooth, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition I