


|                |                 |     |
|----------------|-----------------|-----|
| 7/16-8100-0214 | 7/16 Jack Crimp | 50Ω |
|----------------|-----------------|-----|

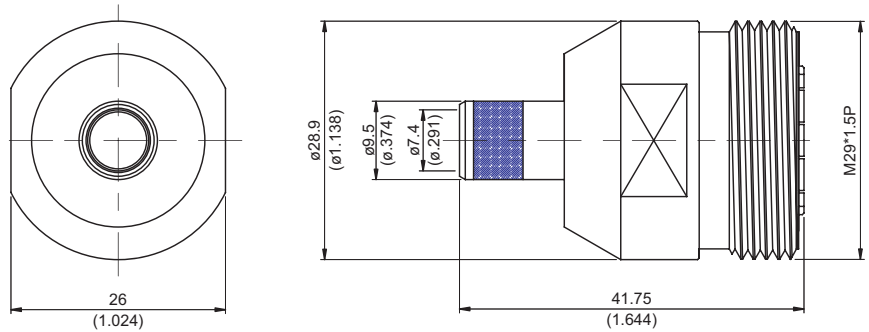

| Parts        | Material        | Plating(Micro-inch)                      |
|--------------|-----------------|--|
| Ferrule      | Brass           | Tin-Zinc-Copper-Alloy 100 Over Copper 50 |
| Contact Body | Brass           | Tin-Zinc-Copper-Alloy 100 Over Copper 50 |
| Contact Pin  | Phosphor Bronze | Silver 150 Over Copper 50                |
| Insulator    | Teflon          |  |
| Body         | Brass           | Tin-Zinc-Copper-Alloy 100 Over Copper 50 |


Weight: 94.26 g  
 Suitable Cables: RG214

**This part number complies with RoHS.**  
**Notice: JYEBAO reserves the right to make modifications deemed appropriate.**

## CABLE ASSEMBLY INSTRUCTION


7/16-8100-0214

JYE BAO CO., LTD.

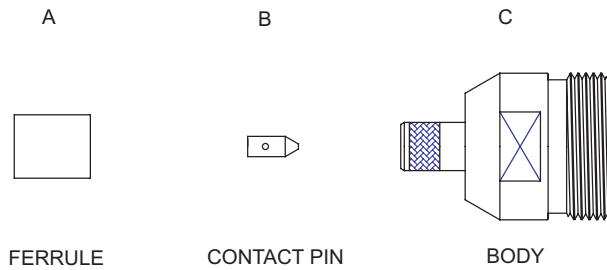


DIAGRAM


ASSEMBLY INSTRUCTION

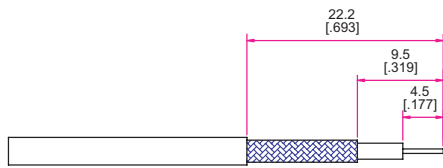


Step 1: STRIP AS SHOWN.

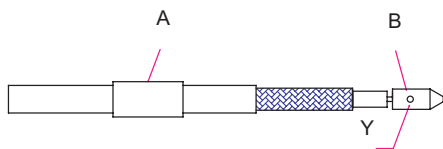

Step 2: SLIDE FERRULE "A" OVER CABLE.  
Step 3: PUT PIN "B" ON CENTER CONDUCTOR AND SOLDER IN "Y".

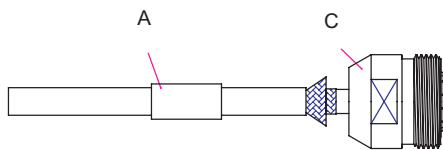

Step 4: LOOSEN BRAIDING AND SLIDE CONNECTOR "C" IN PLACE.

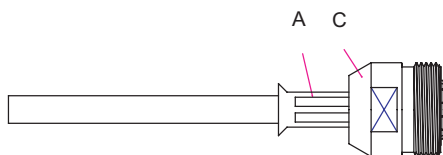

Step 5: SLIDE FERRULE "A" TOWARDS THE CONNECTOR AND CRIMP.

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.