


KUIP-7D55-24 Product Details

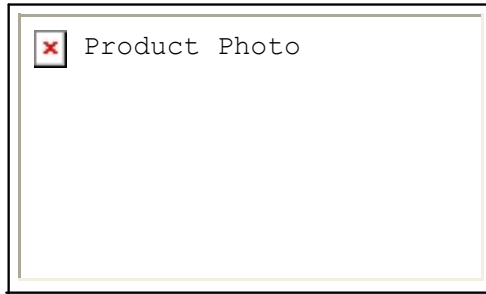

KUIP-7D55-24
(2-1393115-3)

TE Internal Number: 2-1393115-3

Obsolete

[Contact Product Information Center](#)

Industrial Relays (General Purpose)

[Converted to EU RoHS but not ELV Compliant \(Statement of Compliance\)](#)

Product Highlights:

- KUIP Series
- Contact Arrangement = 2 Form A, DPST-NO, 2 N/O
- Contact Current Rating = 10 Amps.
- Monostable Coil Magnetic System
- Without Coil Suppression Diode

[View all Features](#)

Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

[Add to My Part List](#) [Request Sample](#) [Find Similar Products](#) [Buy Product](#)

Documentation & Additional Information

Product Drawings:

- None Available

Catalog Pages/Data Sheets:

- [KU KUP Enclosed Relay KUIP 8mm Coil to Contacts KUGP...](#) (PDF, English)

Product Specifications:

- None Available

Application Specifications:

- None Available

Instruction Sheets:

- None Available

CAD Files:

- None Available

Additional Information:

- [Product Line Information](#)

Additional Product Images:

- [Schematic](#)
- [Wiring Diagram](#)
- [Front View](#)

Related Products:

- [Tooling](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- [Termination Type](#) = .187 x .020 Quick Connect Terminals

Electrical Characteristics:

- [Contact Current Rating \(Amps.\)](#) = 10
- [Coil Resistance \(?\)](#) = 472
- [Actuating System](#) = DC
- [Coil Power, Nominal \(W\)](#) = 1.20
- [Input Voltage \(VDC\)](#) = 24

Body Related Features:

- [Series](#) = KUIP
- Polarized = No
- Coil To Contact Gap (mm [in]) = 8 [0.315]

Contact Related Features:

- [Mounting Options](#) = Bracket Mount Case
- [Enclosure](#) = Enclosed
- FCC Part 68 Isolation = No
- Relay Type = General
- [Contact Base Material](#) = Silver Cadmium Oxide
- Approx. Dimensions (L x W x H) (mm [in]) = 38.90 x 35.70 x 48.40 [1.532 x 1.406 x 1.907]
- Wiring Diagram = 2 Form A
- Approved Standards = UL Recognized, CSA Certified

Configuration Related Features:

- [Contact Arrangement](#) = 2 Form A, DPST-NO, 2 N/O
- [Coil Magnetic System](#) = Monostable
- [Coil Suppression Diode](#) = Without
- [Coil Selection Criteria](#) = Nominal Voltage
- Coil Latching = Without
- Status Indicator = None

Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS/Not ELV Compliant
- [Lead Free Solder Processes](#) = Not relevant for lead free process
- RoHS/ELV Compliance History = Converted to comply with RoHS not ELV directives

Other:

- Brand = Potter & Brumfield