




SINGLE BAND, DUAL POLARISED ANTENNA UMTS XP/65/17/2 TYPE: 2207

- ❑ SINGLE-BAND 3G APPLICATIONS
- ❑ ULTRA LOW-PROFILE RADOME
- ❑ SIDELOBE SUPPRESSION

The '3G Series' of panel antennas from Thales have been designed to easily facilitate the installation of Third Generation cellular infrastructure into new or existing networks. A number of models provide variations in both gain and fixed electrical downtilt to exactly suit the required cell coverage. Slimline radomes reduce visual impact & provide an easily installed, robust enclosure. An extremely low component count and one-piece PCB result in consistently high product quality and reliability, having an excellent intermodulation performance. Two connectors are provided on the base of the unit.

TECHNICAL SPECIFICATION

Frequency	1900 - 2170MHz
Gain	17dBi
VSWR	1.4:1 max
Horizontal Beamwidth	65°
Vertical Beamwidth	8.6°
Fixed Electrical Downtilt Options	2°
Upper Sidelobe Suppression	>18dB
1 st Null Fill Below Horizon	<18dB
Front-To-Back Ratio	>30dB @ ± 180° azimuth
Isolation	30dB typical
Power Rating	200W
Connectors	2 x 7/16" DIN (socket at bottom)
Dimensions (LxWxD)	1070 x 142 x 43 mm
Operational Wind Speed	45m/s
Survival Wind Speed	56m/s
Max Wind Loading (Front)	223 N @ 45m/s
Weight	3.4kg
Temperature Range	-40°C to +70°C

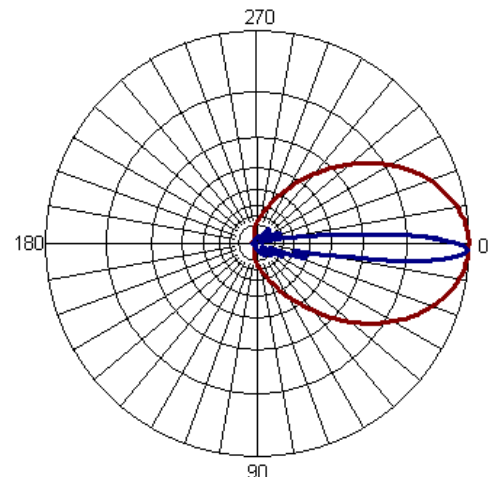

THALES ANTENNAS LTD

First Avenue, Millbrook Trading Estate, Southampton SO15 0LJ United Kingdom
Tel: +44 (0) 2380 705705, Fax: +44 (0) 2380 701122, sales@thalesantennas.com, www.thalesantennas.com
Thales reserve the right to vary in detail from the description and specification in this publication. Issue: 9/01