

Ceramic High Pass Filter

SMT

HFCN-ED14070/2

Important Note

This model has been designed, built and tested in our engineering department. Performance data represents model capability. At present it is a non-catalog model. On request, we can supply a final specification sheet, part number and price/delivery information.




Please click "Back", and then click "Contact Us" for Applications support.

CASE STYLE : FV1206

ELECTRICAL SPECIFICATIONS 50Ω @ +25°C							
Parameters		F#	Frequency (MHz)	Min.	Typ.	Max.	Units
Stop Band	Insertion Loss	DC-F1	DC-650	40	--	--	dB
		DC-F2	DC-850	20	--	--	dB
	Frequency cutoff	F3	1150	--	3	--	dB
	VSWR	DC-F2	DC-850	--	20	--	:1
Pass Band	Insertion Loss	F4-F6	1300-3900	--	--	1.3	dB
		F3-F7	1220-4500	--	--	2	dB
	VSWR	F4-F5	1300-3300	--	1.5	--	:1

MAXIMUM RATINGS	
Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input	7W max.

Functional Schematic

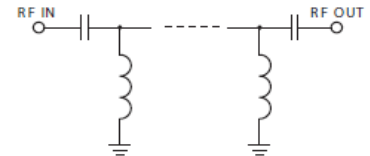

PIN CONNECTIONS	
RF IN	1
RF OUT	3
GROUND	2,4