

# TNC Connectors

FOR FLEXIBLE CABLE




Inches (millimeters)


## Straight Crimp Type Plug

Solder or Crimp Contact

Part Number	Cable	"A"	"B"
137-1407-006	RG-58, 141	.520 (13.20)	.595 (15.11)
137-1409-006	RG-59, 62	.520 (13.20)	.595 (15.11)
137-1440-006	BELDEN 8281	.600 (15.24)	.645 (16.38)
137-1409-026	RG-TFE-59	.520 (13.20)	.595 (15.11)
137-1407-016	RG-TFE-58, RG-303	.541 (13.74)	.595 (15.11)
137-1408-006	RG-142, 223, 400, RG-55	.520 (13.20)	.595 (15.11)
137-1435-006	RG-8X (MINI 8)	.520 (13.20)	.595 (15.11)

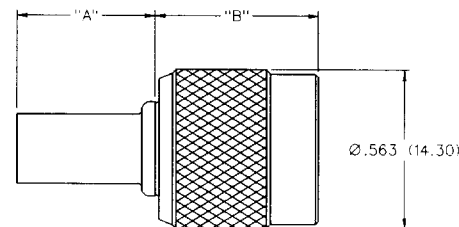

Assembly instructions  
on page 36.


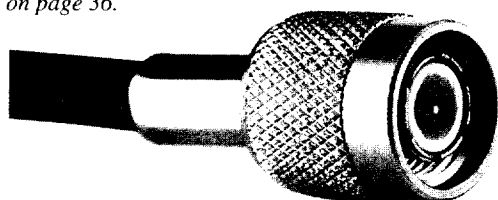


## Straight Crimp Type Plug

Solder or Crimp Contact

Part Number	Cable	Cable
137-2433-006	75 Ohm	RG-179, 187
137-0403-006	50 Ohm	RG-174, 188, 316

Assembly instructions  
on page 36.

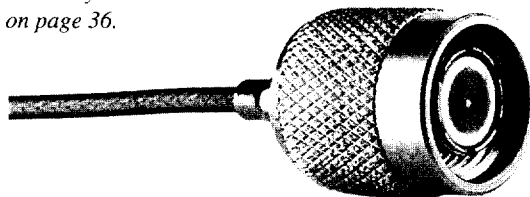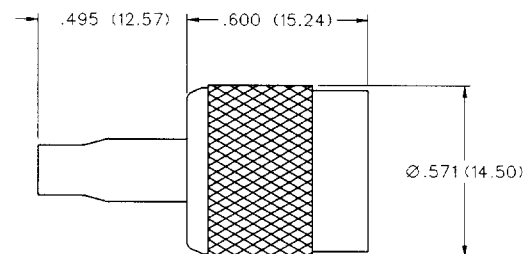

## Straight Crimp Type Plug

2 Piece, Connector to Center Conductor Twist On

Part Number	Cable*	"A"	"B"
137-1407-026	RG-58	.684 (17.37)	.605 (15.37)
137-1409-016	RG-59, 62	.673 (17.09)	.605 (15.37)
137-1440-016	BELDEN 8281	.819 (20.80)	.540 (13.72)
137-1409-036	RG-MATV-59	.677 (17.20)	.605 (15.37)
137-1412-006	RG-6	.684 (17.37)	.605 (15.37)
137-1443-006	TIMES MI 2040	.843 (21.41)	.540 (13.72)
137-1409-046	RG-TFE-59, 62	.680 (17.27)	.605 (15.37)

Assembly instructions on page 37.

\* Requires solid center conductor.

