


TYPES SN5473, SN54H73, SN54L73, SN54LS73A, SN7473, SN74H73, SN74LS73A DUAL J-K FLIP-FLOPS WITH CLEAR

REVISED DECEMBER 1983

- Package Options Include Plastic and Ceramic DIPs
- Dependable Texas Instruments Quality and Reliability

SN5473, SN54H73, SN54LS73A ... J OR W PACKAGE
SN54L73 ... J PACKAGE
SN7473, SN74H73 ... J OR N PACKAGE
SN74LS73A ... D, J OR N PACKAGE

(TOP VIEW)



description

The '73, 'H73, and 'L73 contain two independent J-K flip-flops with individual J-K, clock, and direct clear inputs. The '73, 'H73, and 'L73 are positive pulse-triggered flip-flops. J-K input is loaded into the master while the clock is high and transferred to the slave on the high-to-low transition. For these devices the J and K inputs must be stable while the clock is high.

The 'LS73A contain two independent negative-edge-triggered flip-flops. The J and K inputs must be stable one setup time prior to the high-to-low clock transition for predictable operation. When the clear is low, it overrides the clock and data inputs forcing the Q output low and the \bar{Q} output high.

The SN5473, SN54H73, SN54L73, and the SN54LS73A are characterized for operation over the full military temperature range of -55°C to 125°C . The SN7473, SN74H73, and the SN74LS73A are characterized for operation from 0°C to 70°C .

'73, 'H73, 'L73
FUNCTION TABLE

CLR	INPUTS			OUTPUTS	
	CLK	J	K	Q	\bar{Q}
L	X	X	X	L	H
H	\downarrow	L	L	Q_0	\bar{Q}_0
H	\downarrow	H	L	H	L
H	\downarrow	L	H	L	H
H	\downarrow	H	H	TOGGLE	

'LS73A
FUNCTION TABLE

CLR	INPUTS			OUTPUTS	
	CLK	J	K	Q	\bar{Q}
L	X	X	X	L	H
H	\downarrow	L	L	Q_0	\bar{Q}_0
H	\downarrow	H	L	H	L
H	\downarrow	L	H	L	H
H	\downarrow	H	H	TOGGLE	
H	H	X	X	Q_0	Q_0

FOR CHIP CARRIER INFORMATION,
CONTACT THE FACTORY

3

TTL DEVICES



TEXAS
INSTRUMENTS

POST OFFICE BOX 225012 • DALLAS, TEXAS 75265

3-285





**TYPES SN5473, SN54H73, SN54L73, SN54LS73A,
SN7473, SN74H73, SN74LS73A
DUAL J-K FLIP-FLOPS WITH CLEAR**

logic symbols



Pin numbers shown on logic notation are for D, J or N packages.

schematics of inputs and outputs

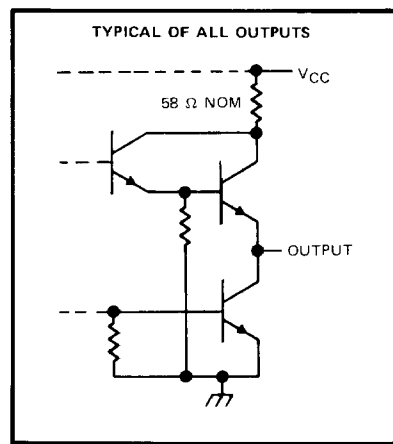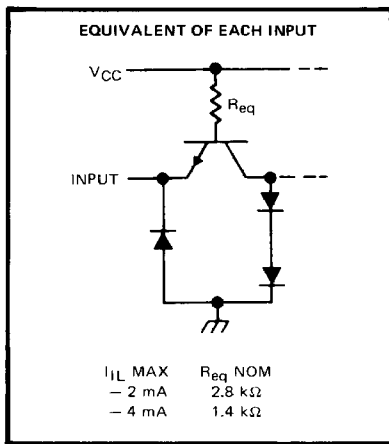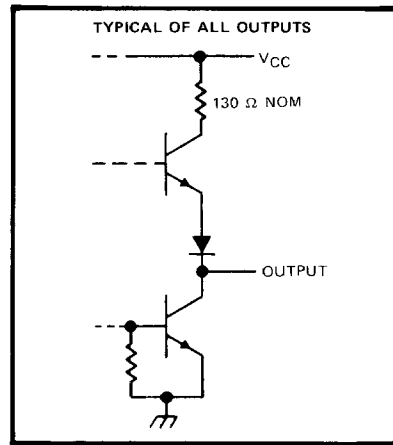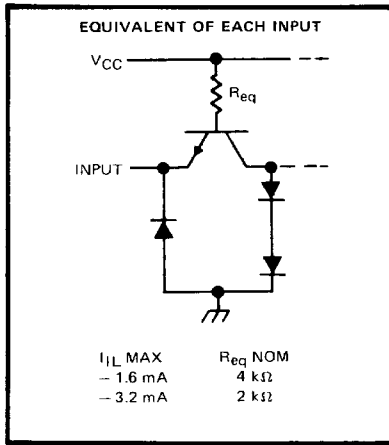


3



TTL DEVICES

TYPES SN54L73, SN54LS73A, SN74LS73A
DUAL J-K FLIP-FLOPS WITH CLEAR


schematics of inputs and outputs (continued)

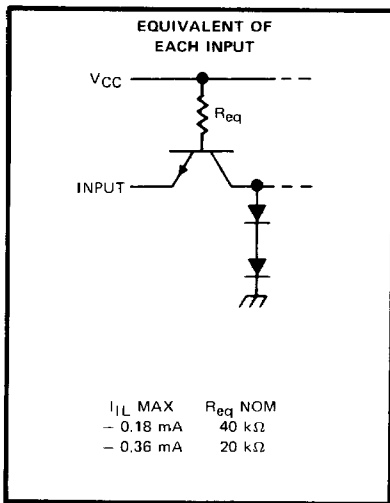

'L73

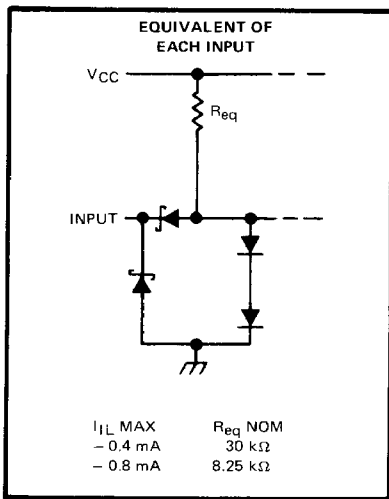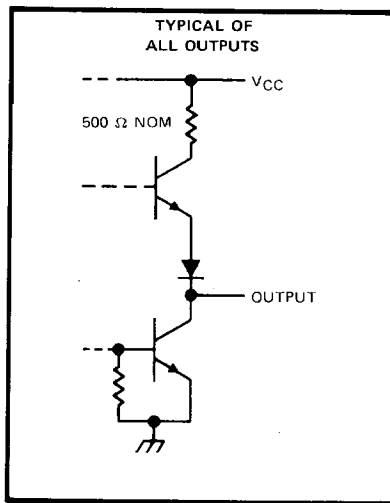

'LS73A


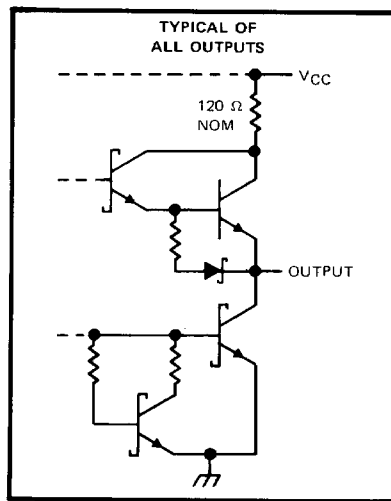


3

TTL DEVICES

TYPES SN5473, SN54H73, SN7473, SN74H73
 DUAL J-K FLIP-FLOPS WITH CLEAR

logic diagrams

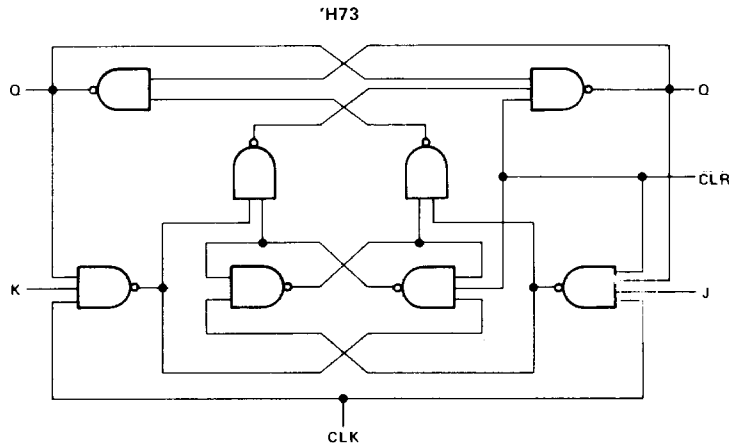
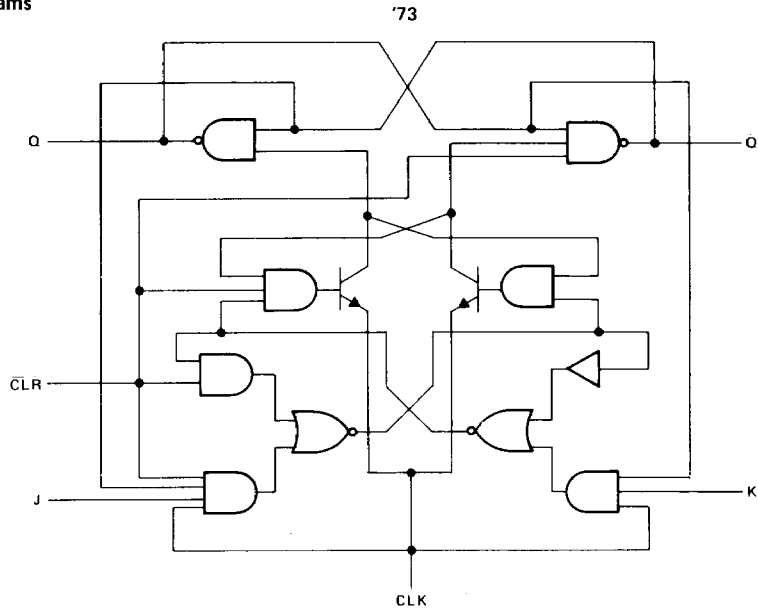


3

TTL DEVICES

TYPES SN5473, SN54H73, SN54L73, SN54LS73A,
 SN7473, SN74H73, SN74LS73A
 DUAL J-K FLIP-FLOPS WITH CLEAR

logic diagrams (continued)

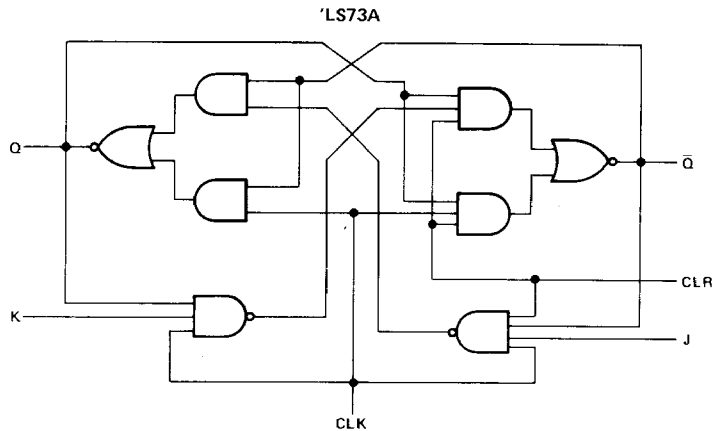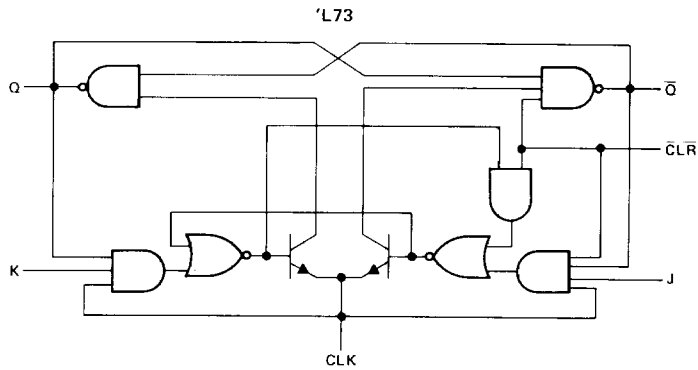

3
TTL DEVICES

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, V_{CC} (see Note 1)	7 V
Input voltage: '73, 'H73, 'L73	5.5 V
'LS73A	7 V
Operating free-air temperature range: SN54'	-55°C to 125°C
SN74'	0°C to 70°C
Storage temperature range	-65°C to 150°C

NOTE 1: Voltage values are with respect to network ground terminal.

TYPES SN5473, SN7473

DUAL J-K FLIP-FLOPS WITH CLEAR

recommended operating conditions

		SN5473			SN7473			UNIT
		MIN	NOM	MAX	MIN	NOM	MAX	
V _{CC}	Supply voltage	4.5	5	5.5	4.75	5	5.25	V
V _{IH}	High-level input voltage	2			2			V
V _{IL}	Low-level input voltage				0.8			V
I _{OH}	High-level output current				-0.4			mA
I _{OL}	Low-level output current				16			mA
t _w	Pulse duration	CLK high		20	20		ns	
		CLK low		47	47			
		CLR low		25	25			
t _{su}	Input setup time before CLK↑	0			0			ns
t _h	Input hold time data after CLK↓	0			0			ns
T _A	Operating free-air temperature	-55			125			°C

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS†		SN5473		SN7473		UNIT
				MIN	TYP‡	MAX	MIN	
V _{IK}		V _{CC} = MIN, I _I = -12 mA		-1.5		-1.5		V
V _{OH}		V _{CC} = MIN, I _{OH} = -0.4 mA	V _{IH} = 2 V, V _{IL} = 0.8 V,	2.4	3.4	2.4	3.4	V
V _{OL}		V _{CC} = MIN, I _{OL} = 16 mA	V _{IH} = 2 V, V _{IL} = 0.8 V,	0.2	0.4	0.2	0.4	V
I _I		V _{CC} = MAX, V _I = 5.5 V		1		1		mA
I _{IH}	J or K	V _{CC} = MAX, V _I = 2.4 V		40		40		μA
	CLR or CLK			80		80		
I _{IL}	J or K	V _{CC} = MAX, V _I = 0.4 V		-1.6		-1.6		mA
	CLR			-3.2		-3.2		
	CLK			-3.2		-3.2		
I _{OS} §		V _{CC} = MAX		-20	-57	-18	-57	mA
I _{CC}		V _{CC} = MAX, See Note 2		10	20	10	20	mA

† For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

‡ All typical values are at V_{CC} = 5 V, T_A = 25°C.

§ Not more than one output should be shorted at a time.

NOTE 2: With all outputs open, I_{CC} is measured with the Q and Q outputs high in turn. At the time of measurement, the clock input is grounded.

switching characteristics, V_{CC} = 5 V, T_A = 25°C (see note 3)

PARAMETER†	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS		MIN	TYP	MAX	UNIT	
f _{max}			R _L = 400 Ω, C _L = 15 pF		15	20		MHz	
t _{PLH}	CLR	Q̄				16	25		ns
t _{PHL}		Q				25	40		ns
t _{PLH}	CLK	Q or Q̄				16	25		ns
t _{PHL}							25	40	

† f_{max} = maximum clock frequency; t_{PLH} = propagation delay time, low-to-high-level output; t_{PHL} = propagation delay time, high-to-low-level output.

NOTE 3: See General Information Section for load circuits and voltage waveforms.

3 TTL DEVICES

TYPES SN54H73, SN74H73 DUAL J-K FLIP-FLOPS WITH CLEAR

recommended operating conditions

		SN54H73			SN74H73			UNIT
		MIN	NOM	MAX	MIN	NOM	MAX	
V_{CC}	Supply voltage	4.5	5	5.5	4.75	5	5.25	V
V_{IH}	High-level input voltage	2			2			V
V_{IL}	Low-level input voltage	0.8			0.8			V
I_{OH}	High-level output current	-0.5			-0.5			mA
I_{OL}	Low-level output current	20			20			mA
t_w	Pulse duration	CLK high	12		12		ns	
		CLK low	28		28			
		CLR low	16		16			
t_{su}	Input setup time before CLK \uparrow	High-level data	0		0		ns	
		Low-level data	0		0			
t_h	Input hold time, data after CLK \downarrow	0			0			ns
T_A	Operating free-air temperature	-55	125		0	70		$^{\circ}$ C

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS \dagger	SN54H73			SN74H73			UNIT
		MIN	TYP \ddagger	MAX	MIN	TYP \ddagger	MAX	
V_{IK}	$V_{CC} = \text{MIN.}$, $I_I = -8 \text{ mA}$	-1.5			-1.5			V
V_{OH}	$V_{CC} = \text{MIN.}$, $V_{IH} = 2 \text{ V.}$, $V_{IL} = 0.8 \text{ V.}$ $I_{OH} = -0.5 \text{ mA}$	2.4	3.4		2.4	3.4		V
V_{OL}	$V_{CC} = \text{MIN.}$, $V_{IH} = 2 \text{ V.}$, $V_{IL} = 0.8 \text{ V.}$ $I_{OL} = 20 \text{ mA}$		0.2	0.4		0.2	0.4	V
I_I	$V_{CC} = \text{MAX.}$, $V_I = 5.5 \text{ V}$		1			1		mA
I_{IH}	J, K, or CLK	50			50			μ A
	CLR	100			100			
I_{IL}	J, K, or CLK	-2			-2			mA
	CLR	-4			-4			
$I_{OS}\S$	$V_{CC} = \text{MAX.}$	-40	-100		-40	-100		mA
I_{CC}	$V_{CC} = \text{MAX.}$, See Note 2		16	25		16	25	mA

\dagger For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

\ddagger All typical values are at $V_{CC} = 5 \text{ V.}$, $T_A = 25^{\circ}\text{C.}$

\S Not more than one output should be shorted at a time, and the duration of the short circuit should not exceed one second.

NOTE 2: With all outputs open, I_{CC} is measured with the Q and \bar{Q} outputs high in turn. At the time of measurement, the clock input is grounded.

switching characteristics, $V_{CC} = 5 \text{ V.}$, $T_A = 25^{\circ}\text{C}$ (see note 3)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS		MIN	TYP	MAX	UNIT
f_{max}			$R_L = 280 \Omega,$	$C_L = 25 \text{ pF}$	25	30		MHz
t_{PLH}	CLR	\bar{Q}			6	13		ns
t_{PHL}		Q			12	24		ns
t_{PLH}	CLK	Q or \bar{Q}			14	21		ns
t_{PHL}					22	27		ns

NOTE 3: See General Information Section for load circuits and voltage waveforms.

3

TTL DEVICES

TYPE SN54L73

DUAL J-K FLIP-FLOPS WITH CLEAR

recommended operating conditions

		MIN	NOM	MAX	UNIT
V _{CC}	Supply voltage	4.5	5	5.5	V
V _{IH}	High-level input voltage	2			V
V _{IL}	Low-level input voltage	Clock input		0.6	V
		All other inputs		0.7	
I _{OH}	High-level output current	-0.1			mA
I _{OL}	Low-level output current	2			mA
t _w	Pulse duration	CLK high or low		200	ns
		CLR low		100	
t _{su}	Setup time before CLK ↑	0			ns
t _h	Hold time-data after CLK ↓	0			ns
T _A	Operating free-air temperature	-55		125	°C

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS†			MIN	TYP‡	MAX	UNIT
V _{OH}		V _{CC} = MIN, V _{IH} = 2 V, V _{IL} = MAX, I _{OH} = -0.1 mA			2.4	3.3		V
V _{OL}		V _{CC} = MIN, V _{IH} = 2 V, V _{IL} = MAX, I _{OL} = 2 mA				0.15	0.3	V
I _I	J or K	V _{CC} = MAX, V _I = 5.5 V					0.1	mA
	CLR or CLK						0.2	
I _{IH}	J or K	V _{CC} = MAX, V _I = 2.4 V					10	μA
	CLR						20	
	CLK						-200	
I _{IL}	J or K	V _{CC} = MAX, V _I = 0.3 V					-0.18	mA
	CLR or CLK						-0.36	
I _{OS}		V _{CC} = MAX			-3		-15	mA
I _{CC}		V _{CC} = MAX, See Note 2				0.76	1.44	mA

† For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

‡ All typical values are at V_{CC} = 5 V, T_A = 25°C.

NOTE 2: With all outputs open, I_{CC} is measured with the Q and \bar{Q} outputs high in turn. At the time of measurement, the clock input is grounded.

switching characteristics, V_{CC} = 5 V, T_A = 25°C (see note 3)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS		MIN	TYP	MAX	UNIT
f _{max}			R _L = 4 kΩ, C _L = 50 pF		2.5	3		MHz
t _{PLH}	CLR	Q or \bar{Q}			35	75		ns
t _{PHL}	CLR (CLK high)	\bar{Q} or Q			60	150		ns
	CLR (CLK low)				200			
t _{PLH}	CLK	Q or \bar{Q}			10	35	75	ns
t _{PHL}					10	60	150	ns

NOTE 3: See General Information Section for load circuits and voltage waveforms.

3

TTL DEVICES

TYPES SN54LS73A, SN74LS73A DUAL J-K FLIP-FLOPS WITH CLEAR

recommended operating conditions

		SN54LS73A			SN74LS73A			UNIT
		MIN	NOM	MAX	MIN	NOM	MAX	
V _{CC}	Supply voltage	4.5	5	5.5	4.75	5	5.25	V
V _{IH}	High-level input voltage	2			2			V
V _{IL}	Low-level input voltage			0.7			0.8	V
I _{OH}	High-level output current			-0.4			-0.4	mA
I _{OL}	Low-level output current			4			8	mA
f _{clock}	Clock frequency	0	30	0	30			MHz
t _w	Pulse duration	CLK high		20	20		ns	
		CLR low		25	20			
t _{su}	Set up time-before CLK ↓	data high or low		20	20		ns	
		CLR inactive		20	20			
t _h	Hold time-data after CLK ↓	0		0		ns		
T _A	Operating free-air temperature	-55	125	0	70	°C		

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS†		SN54LS73A		SN74LS73A		UNIT
				MIN	TYP‡	MAX	MIN	
V _{IK}		V _{CC} = MIN,	I _I = -18 mA		-1.5		-1.5	V
V _{OH}		V _{CC} = MIN,	V _{IH} = 2 V, V _{IL} = MAX,	2.5	3.4	2.7	3.4	V
V _{OL}		V _{CC} = MIN,	V _{IL} = MAX, V _{IH} = 2 V,	0.25	0.4	0.25	0.4	V
		V _{CC} = MIN,	V _{IL} = MAX, V _{IH} = 2 V,			0.35	0.5	
I _I	J or K	V _{CC} = MAX,	V _I = 7 V		0.1		0.1	mA
	CLR				0.3		0.3	
	CLK				0.4		0.4	
I _{IH}	J or K	V _{CC} = MAX,	V _I = 2.7 V		20		20	μA
	CLR				60		60	
	CLK				80		80	
I _{IL}	J or K	V _{CC} = MAX,	V _I = 0.4 V		-0.4		-0.4	mA
	CLR or CLK				-0.8		-0.8	
I _{OS} §		V _{CC} = MAX,	See Note 4	-20	-100	-20	-100	mA
I _{CC}		V _{CC} = MAX,	See Note 2	4	6	4	6	mA

† For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

‡ All typical values are at V_{CC} = 5 V, T_A = 25°C.

§ Not more than one output should be shorted at a time, and the duration of the short circuit should not exceed one second.

NOTE 2: With all outputs open, I_{CC} is measured with the Q and Q outputs high in turn. At the time of measurement, the clock input is grounded.

NOTE 4: For certain devices where state commutation can be caused by shorting an output to ground, an equivalent test may be performed with V_O = 2.25 V and 2.125 V for the 54 family and the 74 family, respectively, with the minimum and maximum limits reduced to one half of their stated values.

switching characteristics, V_{CC} = 5 V, T_A = 25°C (see note 3)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS		MIN	TYP	MAX	UNIT
t _{max}			R _L = 2 kΩ,	C _L = 15 pF	30	45		MHz
t _{PLH}	CLR or CLK	Q or Q̄			15	20		ns
t _{PHL}					15	20		ns

NOTE 3: See General Information Section for load circuits and voltage waveforms.

TTL DEVICES