



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DDD-525-042 REV: 1.0

0.54" Dual Digit Alphanumeric Displays

MODEL NO : ELD-525SYGWA/S530-E1 ECN : Page: 1/5

■ Features :

- Industrial standard size.
- Low power consumption.
- Categorized for luminous intensity.

■ Applications:

- Audio equipment
- Instrument panels
- Digital read out display

■ Description :

- The ELD-525 series is a large 13.6mm (0.54")high seven segment display design for viewing distances up to 7 meters.
- These displays provide excellent reliability in bright ambient light.
- These device is made with white segments and gray surface.

PART NO	CHIP		C.C. or C.A.
	Material	Emitted Color	
ELD-525SYGWA/S530-A2	AlGaInP	Super Yellow Green	C.C.

OFFICE : NO. 25,Lane 76,Sec.3, Chung Yang Rd., Tucheng 236, Taipei, Taiwan, R.O.C.

TEL : 886-2-2267-2000,2267-9936

FAX : 886-2-2267-6244,22676189,22676306





<http://www.everlight.com>



0.54" Dual Digit Alphanumeric Displays


MODEL NO : ELD-525SYGWA/S530-E1 ECN : Page: 2/5

■ Package Dimension:

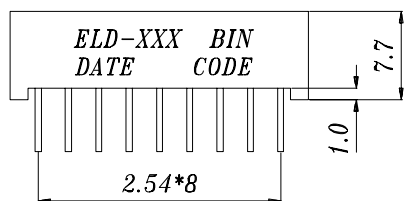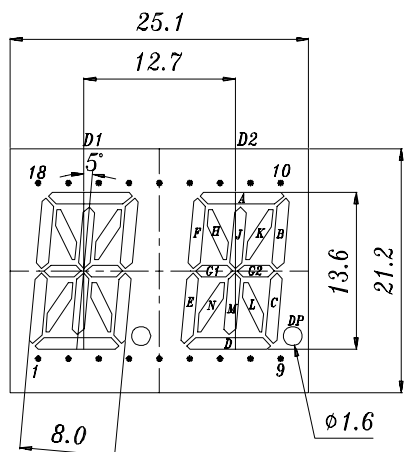

COMMON CATHODE

- 1 ANODE E
- 2 ANODE N
- 3 NO CONNECT
- 4 ANODE M
- 5 ANODE L
- 6 ANODE G2
- 7 ANODE D
- 8 ANODE DP
- 9 ANODE C
- 10 ANODE B
- 11 COMMON CATHODE DIG.2
- 12 ANODE A
- 13 ANODE G1
- 14 ANODE K
- 15 ANODE J
- 16 COMMON CATHODE DIG.1
- 17 ANODE H
- 18 ANODE F

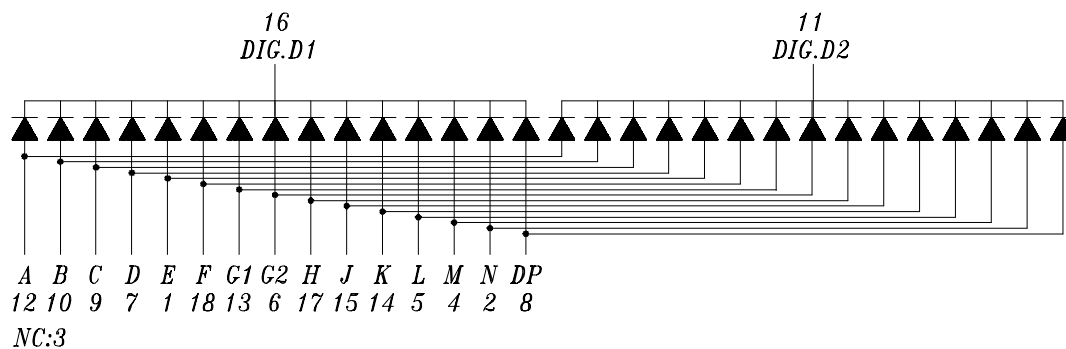

■ NOTES:

- 1.All dimensions are millimeters , tolerance is 0.25mm unless otherwise noted.
 - 2.Above specification may be changed without notice.
- Supplier will reserve authority on material change for above specification.



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DDD-525-042 REV: 1.0

0.54" Dual Digit Alphanumeric Displays

MODEL NO : ELD-525SYGWA/S530-E1 ECN : Page: 3/5

■ Absolute maximum ratings at Ta = 25℃ :

Parameter	Symbol	Rating	Unit
Reverse Voltage	V _r	5	V
Forward Current	I _f	25	mA
Operating Temperature	T _{opr}	-40 to +85	℃
Storage Temperature	T _{stg}	-40 to +100	℃
Soldering Temperature	T _{sol}	260 ± 5	℃
Electrostatic Discharge	ESD	2000	V
Power Dissipation	P _d	60	mW
Peak Forward Current(Duty 1/10 @ 1KHZ)	I _f (Peak)	160	mA

■ Electronic optical characteristics :

Parameter		Symbol	MIN.	TYP.	MAX.	Unit	Condition
Luminous Intensity	Per	I _v	0.28	0.8	----	mcd	If=2mA
	segment		2.0	5.3	----	mcd	If=10mA
	Per		0.07	0.45	----	mcd	If=2mA
	decimal point		0.75	2.80	----	mcd	If=10mA
Peak Wavelength		λ _p	----	575	----	nm	If=20mA
Dominant Wavelength		λ _d	----	573	----	nm	If=20mA
Spectrum Radiation Bandwidth		△λ	----	20	----	nm	If=20mA
Forward Voltage		V _f	----	2.0	2.4	V	If=20mA
Reverse Current		I _r	----	----	10	μA	V _r =5V



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DDD-525-042

REV: 1.0

0.54" Dual Digit Alphanumeric Displays

MODEL NO : ELD-525SYGWA/S530-E1

ECN :

Page: 4/5

■ Reliability test item and condition:

NO	Item	Test Conditions	Test Hours/Cycle	Sample Size	Ac/Re
1	Solder Heat	TEMP : 260℃ ± 5 ℃	5 SEC	76 PCS	0/1
2	Temperature Cycle	H : +85℃ 30min └ 5 min L : -55℃ 30min	50 CYCLE	76 PCS	0/1
3	Thermal Shock	H : +100℃ 5min └ 10 sec L : -10℃ 5min	50 CYCLE	76 PCS	0/1
4	High Temperature Storage	TEMP : 100℃	1000 HRS	76 PCS	0/1
5	Low Temperature Storage	TEMP : -55℃	1000 HRS	76 PCS	0/1
6	DC Operating Life	If = 10 mA	1000 HRS	76 PCS	0/1
7	High Temperature / High Humidity	85℃/85% RH	1000 HRS	76 PCS	0/1



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number :

DDD-525-042

REV:

1.0

0.54" Dual Digit Alphanumeric Displays

MODEL NO:

ELD-525SYGWA/S530-E1

ECN :

Page:

5/5

Typical Electro-Optical Characteristic Curves:

SYG

