


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

SD

M39012/13-0001

REVISIONS	
ISSUE	CHANGES
0	ER 7424 AME 05/02/69
1	CN 23168 E GJG 03/24/82
2	CN 32263 A LNM 06/07/90
3	CN 38697 C BDH 10/21/02

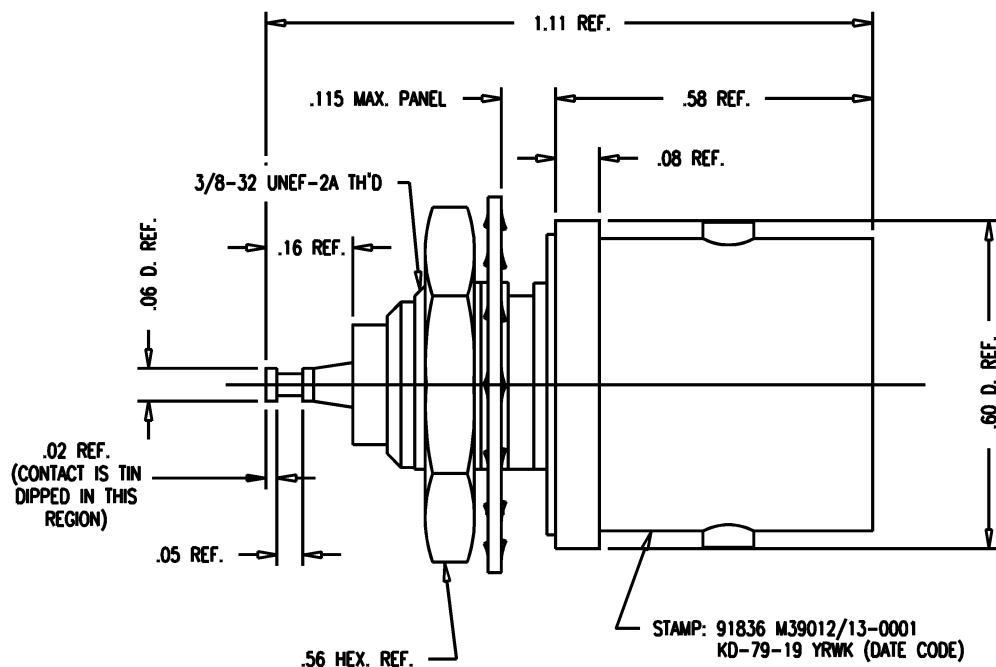

NOTES:

1. MATERIALS:


INSULATOR-TEFLON, ASTM-D-1457
GASKET-SILICONE RUBBER, ZZ-R-765
LOCKWASHER-PHOSPHOR BRONZE, QQ-B-750
CENTER CONTACT-BER. COP., ASTM-B-196
ALL OTHER METAL PARTS-BRASS, QQ-B-626

2. FINISHES:

CENTER CONTACT-GOLD PLATE PER MIL-G-45204
ALL OTHER METAL PARTS-SILVER PLATE PER QQ-S-365

3. ELECTRICAL CHARACTERISTICS:

NOMINAL IMPEDANCE-50 OHMS
FREQUENCY RANGE-DC TO 11 GHZ
WORKING VOLTAGE-1000 VRMS

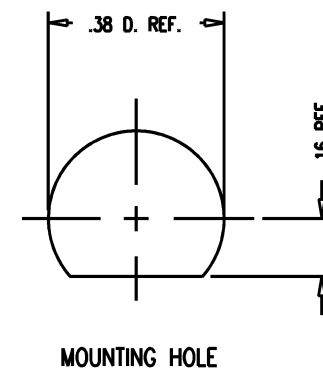

MOUNTING HOLE

KAM1208

SCALE 4:1

APPROX SURFACE AREA

KD-79-13

USED ON

REF:

RECEPTACLE, BULKHEAD, C

DRAWN KH DATE 06/13/91

DESIGN MJB DATE 06/13/91

APPR. DATE

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

M39012/13-0001

SD

UNLESS OTHERWISE SPECIFIED

1. TOLERANCES: FRACTIONS & 2 PLACE DECIMALS ± .010
3 PLACE DECIMALS ± .004 ANGLES ± 1°
CONCENTRICITY OF ANY 2 DIAMETERS MAY NOT
EXCEED HALF THE SUM OF THEIR TOLERANCES.

2. REMOVE ALL BURRS, BREAK SHARP EDGES .005 MAX.
3. NO FILLETS PERMITTED.
4. SURFACE ROUGHNESS 63 MICROINCHES RMS MAX.
5. ALL DIMENSIONS PRIOR TO PLATING.
6. ALL PLATING IN ACCORDANCE WITH KER 10004.

7. ALL LEAD THREADS TO BE
CHAMFERED 45° TO ROOT DIAMETER.
* CRITICAL DIMENSIONS