



- ◎ 4 position shielded receptacle connector
- ◎ DIP Straight angle through hole
- ◎ 2mm centerline and 2.5mm centerline power contacts
- ◎ High durability and long cycle life


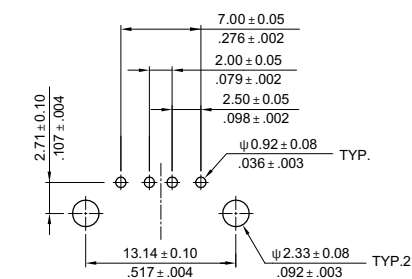


P/N	CU01S*H*S00
-----	-------------

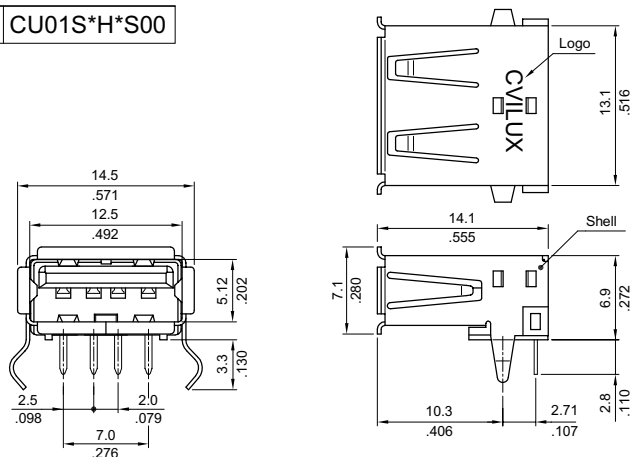

Recommended P.C. Board Layout

P/N	CU01S*H*D00
-----	-------------

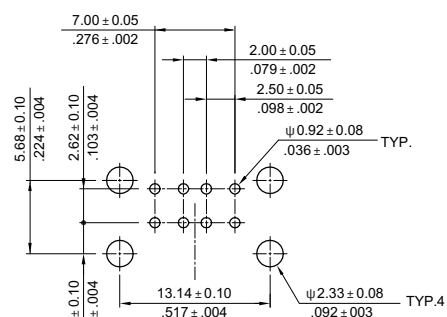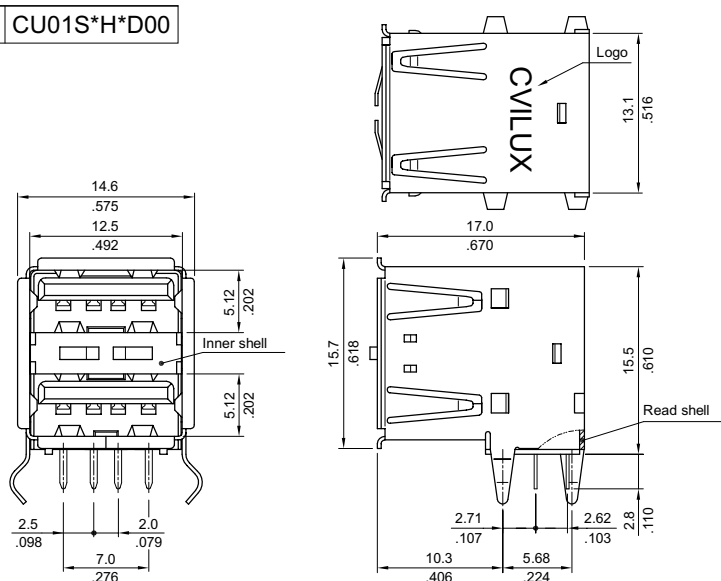

Recommended P.C. Board Layout

Ordering Code

① CU 0 1 ② S ③ A ④ H ⑤ 1 ⑥ S ⑦ 0 0

- | | | |
|---|---------------------------|-------------------------|
| 1 Series No. | 4 Tail style: | 7 Options: |
| 2 S= Socket | H = Right angle DIP | 00= Standard |
| 3 Plating code: | 5 Insulator color: | |
| A= Selective Gold flash over 50µin Nickel on contact area | 1= Black ; 0=White | *Special option Consult |
| C= Selective 30µin Gold over Nickel on contact area | 6 Type: | manufacturer |
| P= Selective Gold flash over 28µin PI-NI on contact area | S= Single port | |
| | D= DUAL port | |