

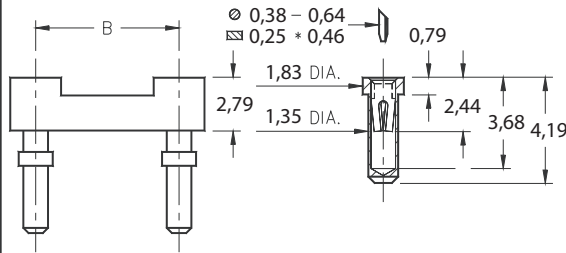


Carrier Type Low Profile

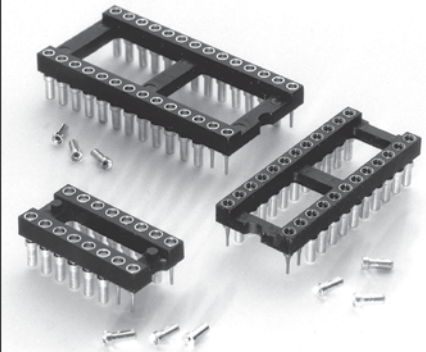

- Convenient way to load loose receptacles on PC board. See page 32 for application details.
- Removable plastic carriers can be returned for reloading.
- Hi-Rel, 4-finger BeCu #30 clip rated at 3 amps. See page 208 for details.
- Uses M-M#1401 pin. See page 139 for details.



Total number of pins				Quantity per tube	Ordering Information						
	A	B	C								
10	12,6	5,08	7,6	40	XX=Plating Code See Below	614-XX-210-41-001000					
4	5,0	7,62	10,1	102		614-XX-304-41-001000					
6	7,6	7,62	10,1	67		614-XX-306-41-001000					
8	10,1	7,62	10,1	50		614-XX-308-41-001000					
10	12,6	7,62	10,1	40		614-XX-310-41-001000					
14	17,7	7,62	10,1	28		614-XX-314-41-001000					
16	20,3	7,62	10,1	25		614-XX-316-41-001000					
18	22,8	7,62	10,1	22		614-XX-318-41-001000					
20	25,3	7,62	10,1	20		614-XX-320-41-001000					
22	27,8	7,62	10,1	18		614-XX-322-41-001000					
24	30,4	7,62	10,1	16		614-XX-324-41-001000					
28	35,5	7,62	10,1	14		614-XX-328-41-001000					
20	25,4	10,16	12,7	20	For RoHS compliance, select plating code. For the all gold option (XX=13) also change part number from 614-XX-XXX-41-001000 to 614-13-XXX-41-001100	614-XX-420-41-001000					
22	27,8	10,16	12,7	18		614-XX-422-41-001000					
24	30,4	10,16	12,7	16		614-XX-424-41-001000					
28	35,5	10,16	12,7	14		614-XX-428-41-001000					
32	40,6	10,16	12,7	12		614-XX-432-41-001000					
24	30,5	15,24	17,7	16		614-XX-624-41-001000					
28	35,5	15,24	17,7	14		614-XX-628-41-001000					
32	40,6	15,24	17,7	12		614-XX-632-41-001000					
36	45,7	15,24	17,7	11		614-XX-636-41-001000					
40	50,8	15,24	17,7	10		614-XX-640-41-001000					
42	53,3	15,24	17,7	9		614-XX-642-41-001000					
48	60,9	15,24	17,7	8		614-XX-648-41-001000					
50	63,5	15,24	17,7	8	RoHS 2002/95/EC	614-XX-650-41-001000					
52	66,0	15,24	17,7	7		614-XX-652-41-001000					
50	63,5	22,86	25,3	8		614-XX-950-41-001000					
52	66,0	22,86	25,3	7		614-XX-952-41-001000					
64	81,2	22,86	25,3	6		614-XX-964-41-001000					
SPECIFY PLATING CODE XX=				13			93	99		43	44
Sleeve (Pin) 				0,25µm Au			5,08µm Sn/Pb	5,08µm Sn/Pb		5,08µm Sn	5,08µm Sn
Contact (Clip) 				0,76µm Au			0,76µm Au	5,08µm Sn/Pb		0,76µm Au	5,08µm Sn

For RoHS compliance, select plating code. For the all gold option (XX=13) also change part number from 614-XX-XXX-41-001000 to 614-13-XXX-41-001100

