

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0759001161](#)  
**Status:** **Active**  
**Overview:** [MX150 Connector System](#)  
**Description:** MX150 Dual Row Header, Right-Angle, 12 Circuits, 1.25µm Nickel (Ni) Overall, 2.50µm Minimum Select Matte Tin (Sn) Plating Overall, 3.05mm PC Tail Length, Mating Pin Length 12.15mm

**Documents:**


<a href="#">3D Model</a>	<a href="#">Packaging Specification PK-75900-0001-001 (PDF)</a>
<a href="#">Drawing (PDF)</a>	<a href="#">Packaging Specification PK-75900-003-001 (PDF)</a>
<a href="#">3D Model (PDF)</a>	<a href="#">Datasheet (PDF)</a>
<a href="#">Product Specification PS-75757-000-001 (PDF)</a>	<a href="#">RoHS Certificate of Compliance (PDF)</a>
<a href="#">Packaging Specification PK-36518-351-001 (PDF)</a>	

**General**

Product Family	PCB Headers
Series	<a href="#">75900</a>
Application	Power, Wire-to-Board
Component Type	PCB Header
Overview	<a href="#">MX150 Connector System</a>
Product Name	MX150
Taxonomy	PCB Headers and Receptacles
UPC	800756906614

**Physical**

Breakaway	No
Circuits (Loaded)	12
Circuits (maximum)	12
Color - Resin	Black
Durability (mating cycles max)	25
First Mate / Last Break	No
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	None
Material - Metal	Brass
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	3.934/g
Number of Rows	2
Orientation	Right Angle
PC Tail Length	3.05mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.57mm
Packaging Type	Tube
Pitch - Mating Interface	3.50mm
Pitch - Termination Interface	3.50mm
Plating min - Mating	1.270µm
Polarized to Mating Part	No
Polarized to PCB	No
Shrouded	No
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-40° to +125°C
Termination Interface: Style	Through Hole

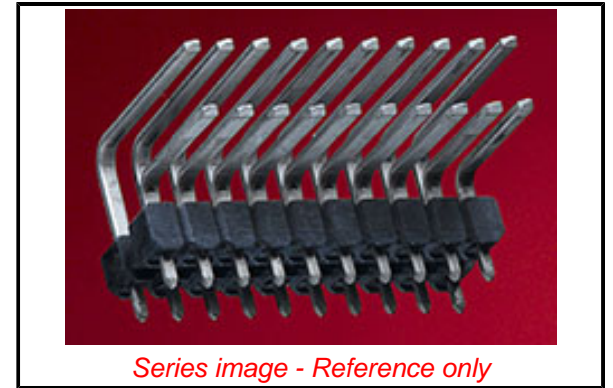

*Series image - Reference only*

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained per -  
D(2022)9120-DC (17  
Jan 2023)

**Halogen-Free**

**Status**

**Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[75900 Series](#)

**Mates With**

[33472 Dual Row MX150 Receptacles](#)

**Electrical**

Current - Maximum per Contact 17.0A  
Voltage - Maximum 500V DC

**Solder Process Data**

Duration at Max. Process Temperature (seconds) 005  
Lead-free Process Capability WAVE  
Max. Cycles at Max. Process Temperature 001  
Process Temperature max. C 245

**Material Info****Reference - Drawing Numbers**

Packaging Specification PK-36518-351-001, PK-75900-0001-001,  
PK-75900-003-001  
Product Specification PS-75757-000-001  
Sales Drawing SD-75900-001-001

This document was generated on 04/10/2023

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**