
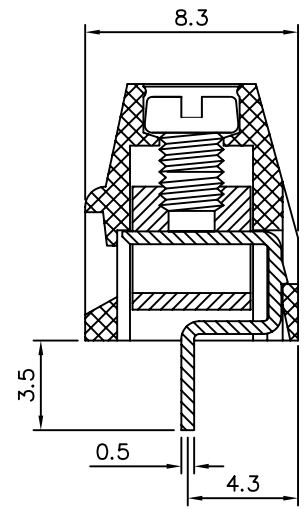
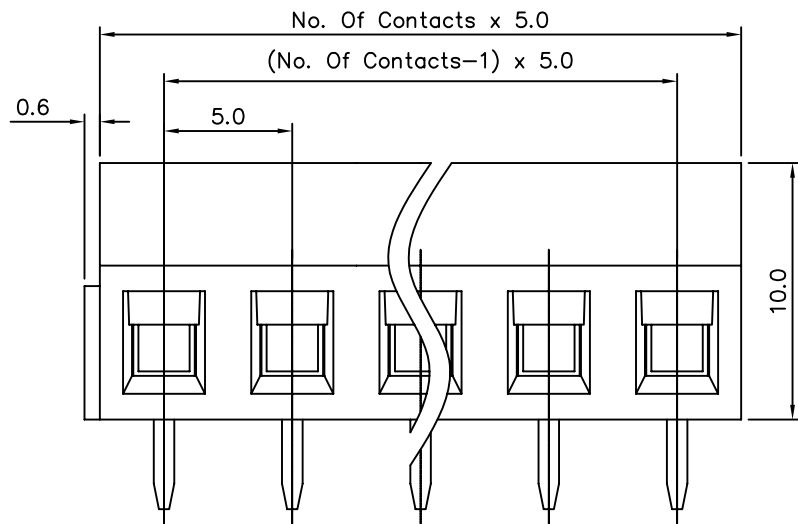


P.C.B Layout

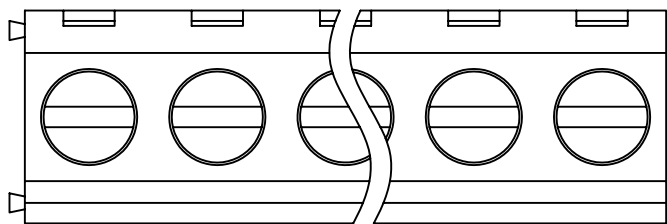

**SPECIFICATIONS**

Voltage Rating: 300VAC  
 Current Rating: 10 Amps/Way Max  
 Contact Resistance: 20 Milliohms(Max)  
 Insulation Resistance: 5000 Megohms/1000V  
 Withstanding Voltage: 1500VAC(1Min) Test Time=60sec/1pcs  
 Wire Range: 16-26AWG  
 Torque: 4kgf.cm/M2.5  
 Operating Temperature: -40°C To +120°C  
 Soldering Reliability: Test Temperature=250°C±10°C/5 Seconds Max  
 Contact(Metal Housing): Brass Machined  
 Terminal Screw: Tin Plated  
 Solder Pin: Brass With Tin Plated  
 Insulating Body(Housing): Polyamide(Glass Filled)(UL94V-0)

**AUK** A MEMBER OF AUK GROUP  
**太聯事業股份有限公司**  
**AUK CONTRACTORS CO., LTD.**

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.5 .X ±0.3 .XX ±0.2 ANG. ±1°					
PART No. TBHXXA		MEI							
DRAWING No. TBHXXA		SHIN							
SCALE NONE		YI							
REV.	A0	UNIT mm	∅	UNIT mm	∅	△ A0	NEW RELEASE	SHIN	10/03/2006
NO.	REV.	REVISIONS	CHK	DATE					