



## 586-4606-801

- Designed for LED reading light applications
- Bayonet base
- 20 degree circular beam pattern
- 55 mAmps @ 24 VDC
- 70 lux @ 1 meter, 350 lux @ 0.5 meters




## 13051C - 12 Volt , 13052C - 24 Volt ( Preliminary Information )

- 2.5" x 1" mini design
- Wire termination
- Potted construction
- 45 degree x 10 degree beam pattern
- 30 mAmps @ 12 VDC, 15 mAmps @ 24 VDC
- 8 lux @ 1 meter, 30 lux @ 0.5 meters
- IP65 compliant

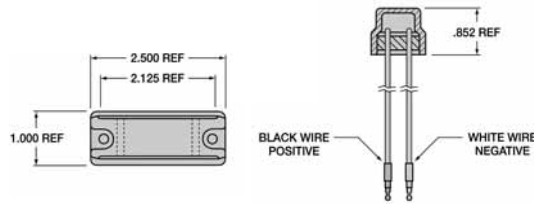


## 17081CT801 - 12 Volt , 17082CT802 - 24 Volt

- Lens includes optics to disperse light
- 2.5" lens diameter w/ black flange
- 12 inch wire termination
- Welded design
- 45 degree x 10 degree beam pattern
- 175 mAmps @ 12 VDC, 80 mAmps @ 24 VDC
- 23 lux @ 1 meter, 120 lux @ 0.5 meters
- IP65 compliant

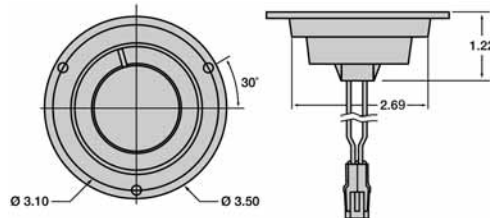


## 17081CT803 - 12 Volt , 17082CT804 - 24 Volt

- Clear lens for spot lighting
- 2.5" lens diameter w/ black flange
- 12 inch wire termination
- Welded design
- 20 degree circular beam pattern
- 175 mAmps @ 12 VDC, 80 mAmps @ 24 VDC
- 98 lux @ 1 meter, 450 lux @ 0.5 meters
- IP65 compliant

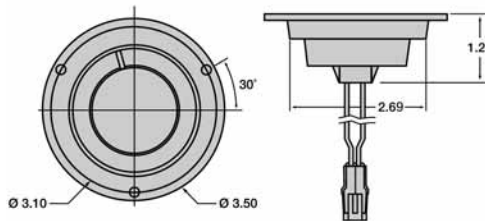

## 18051C - 12 Volt , 18052C - 24 Volt

- 1.95" x 4.8" lens with optics
- Wire termination
- Welded design
- 67 mAmps @ 24 Volts
- IP65 compliant

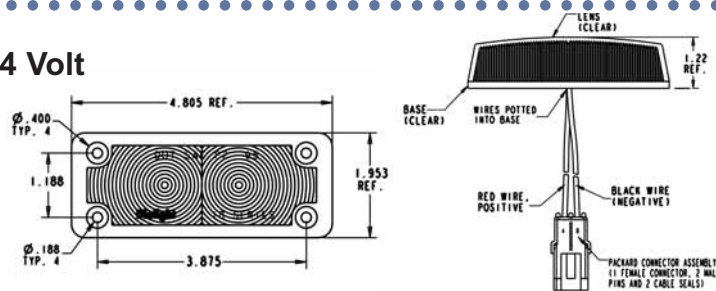

**Note:** Contact your Dialight sales representative for custom wire lengths and custom terminations.


**Dialight Corporation**

1501 Route 34 South • Farmingdale, NJ 07727 USA

Tel: (1) 732-919-3119 • Fax: (1) 732-751-5778 • www.dialight.com


### 46051C – 14 Volt, 46052C – 24 Volt

- 4" round lamp with dispersing optics
- 12 inch wire termination
- Potted construction
- 45 degree x 10 degree beam pattern
- 180 mAmps @ 14 VDC, 120 mAmps @ 24 VDC
- 130 lux @ 1 meter, 560 lux @ 0.5 meters
- IP65 compliant

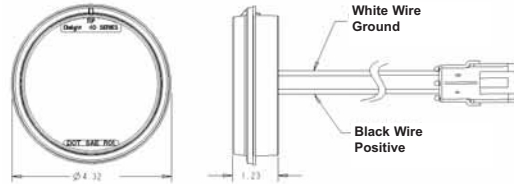


### 46051CT801 - 14 Volt

- High intensity version of 46051C
- 4" round lamp with dispersing optics
- 12 inch wire termination
- Potted construction
- 45 degree x 10 degree beam pattern
- 360 mAmps @ 14 VDC
- 260 lux @ 1 meter, 1120 lux @ 0.5 meters
- IP65 compliant

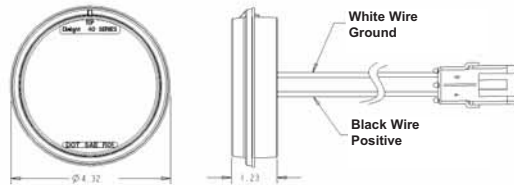


### 47051C - 14 Volt, High Intensity

- Low intensity version also available
- 4" round lamp with a clear lens
- 12 inch wire termination
- Potted construction
- IP65 compliant

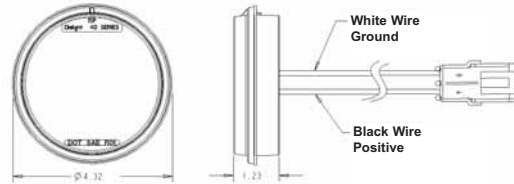


### 71051C - 14 Volt

- 7" round lamp with dispersing optics
- 12 inch wire termination
- Potted construction
- 45 degree x 10 degree beam pattern
- 360 mAmps @ 14 VDC
- 240 lux @ 1 meter, 1100 lux @ 0.5 meters
- IP65 compliant

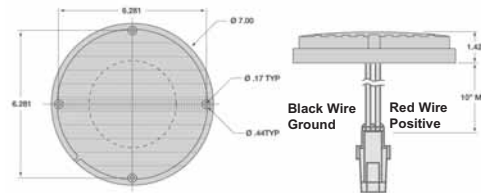

### 87051C - 14 Volt


- 18" x 0.75" with diffused lens
- 12 inch wire termination
- Potted construction
- Wide angle uniform beam
- 180 mAmps @ 14 VDC
- 8 lux @ 1 meter, 38 lux @ 0.5 meters
- IP65 compliant

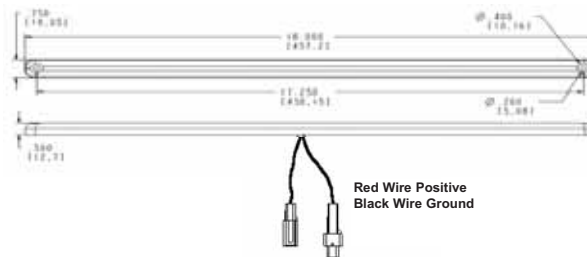

### VSL-CC-17B-35-801 - 10-30 Volt

### VSL-CC-37B-35-801 - 24 Volt

- 18" x 0.8" with clear lens
- Weather Pak connector wire termination
- Wide angle beam
- 750 mAmps @ 24 volts
- 300 lumen output
- IP65 compliant

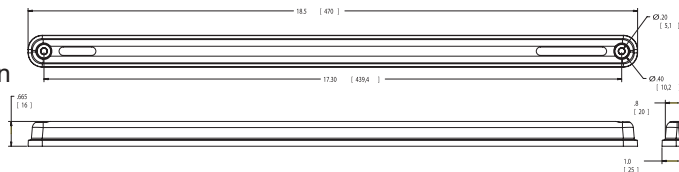

**Note:** Contact your Dialight sales representative for custom wire lengths and custom terminations.

**Dialight Corporation**

1501 Route 34 South • Farmingdale, NJ 07727 USA

Tel: (1) 732-919-3119 • Fax: (1) 732-751-5778 • www.dialight.com



MDTBWLPTRANS001\_E