


GSD

UG-536B/U

REVISIONS

ISSUE	CHANGES
7	CN 26555 D EAJ 08/11/84

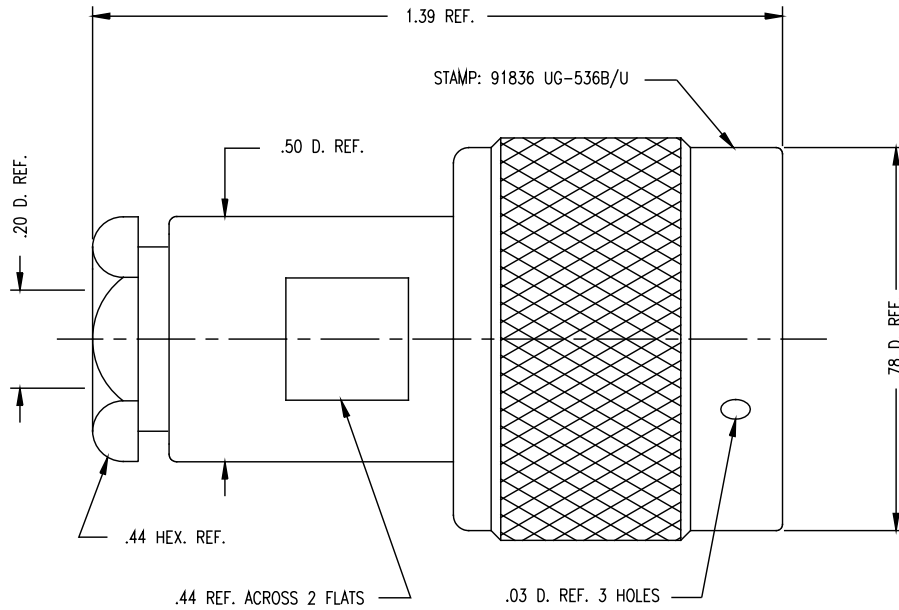

NOTES:

- FOR USE WITH RG-55, 58, 141, 142, AND 400/U CABLE GROUPS.
- FOR CABLING INSTRUCTIONS SEE CP-1014.
- INTERFACE PER MIL-STD-348, FIG. 304-1.
- MATERIALS:
 INSULATOR-TEFLON, ASTM-D-1457
 GASKET-SILICONE RUBBER, ZZ-R-765
 C-RING } PHOSPHOR BRONZE, QQ-B-750
 OUTER CONTACT }
 ALL OTHER METAL PARTS-BRASS, ASTM-B16
- FINISHES:
 ALL METAL PARTS-SILVER PLATE PER QQ-S-365
- ELECTRIAL CHARACTERISTICS:
 NOMINAL IMPEDANCE-50 OHMS
 FREQUENCY RANGE-DC TO 11 GHZ
 WORKING VOLTAGE-1000 VRMS

KAM1773

SCALE 4:1

APPROX SURFACE AREA

KN-57-05

USED ON

REF: RE-B-49090A

PLUG, N

DRAWN KH DATE 02/13/92

DESIGN WJB DATE 02/14/92

APPR. DATE

KINGS
 ELECTRONICS CO., INC.
 TUCKAHOE, NEW YORK 10707

UG-536B/U

GSD

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Winchester Interconnect:](#)

[UG-536 B/U](#)