

DC BLOCKS

BNC, 10 MHz - 4 GHz, 200 Volts

SPECIFICATIONS:

Models: 8080, 8081, 8082, 8083, 8804, 8085, 8086, 8087, 8088

RoHS
Compliant


Electrical:

Frequency Range _____ 10 MHz - 4 GHz
 VSWR _____ 1.35:1 Max.
 Impedance _____ 50 Ohms
 Insertion Loss _____ 0.5 dB Max.
 Voltage Rating _____ 200 Volts Max.
 Operating Temp. Range _____ -65°C to +125°C

Mechanical:

BNC Connectors _____ Nickel Plated Brass
Mates with MILSTD-348
 Conductors _____ Gold Plated Beryllium Copper

AEROFLEX
A passion for performance.

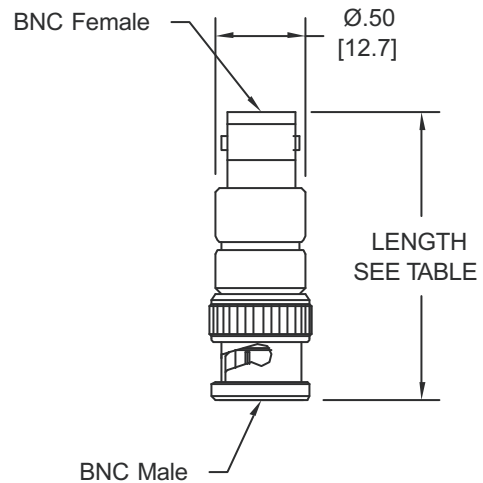

Model Shown: **8080**

TABLE

MODEL NUMBER	BLOCK TYPE	CONN. CONFIG.	LENGTH
8080	INNER ONLY	MALE/ FEMALE	1.60 ±.04 [40.6 ±1.0]
8081	OUTER ONLY		
8082	INNER-OUTER		
8083	INNER ONLY	FEMALE/ FEMALE	1.49 ±.04 [37.7 ±1.0]
8084	OUTER ONLY		
8085	INNER-OUTER		
8086	INNER ONLY	MALE/ MALE	1.71 ±.03 [43.5 ±1.0]
8087	OUTER ONLY		
8088	INNER-OUTER		

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.

8080: REV B

AEROFLEX
INMET

Aeroflex / Inmet, Inc. • 300 Dino Drive, Ann Arbor, MI 48103 • U.S.A.
 888-244-6638 or 734-426-5553 • FAX: 734-426-5557
 www.aeroflex.com/inmet • inmet@aeroflex.com