


NC-C2800-T *Brief Datasheet*

Nickel Cadmium Battery




1 Dimension

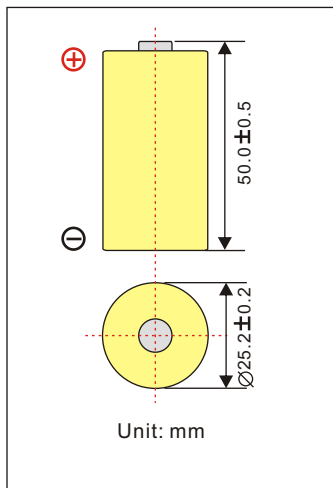

2 Basic Specification

Nominal Voltage			1.2V
Nominal Capacity*	Typical		2850mAh (0.2C discharge)
	Minimum		2800mAh (0.2C discharge)
Charge	Standard		280mA for 16hrs
	Fast		1400mA for Approx. 150mins
Internal Impedance			≤20mohms
Life Cycles			500 cycles
Operation Temperature	Charge	Standard	0°C to 40°C
		Fast	10°C to 40°C
	Discharge		-10°C to 50°C
	Storage	<1year	-10°C to 30°C
		<3month	-10°C to 40°C
Discharge cut-off voltage			1.0V
Weight			Approx. 70g

3 Electrical Characteristics

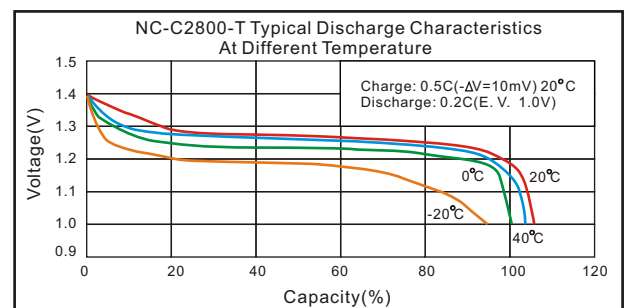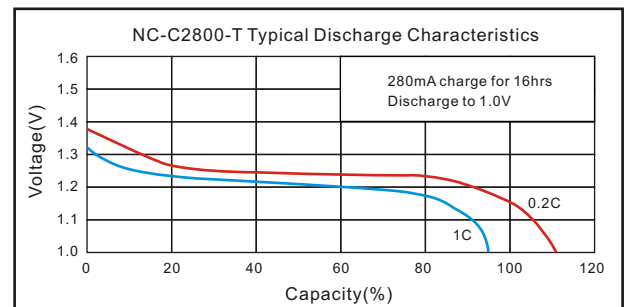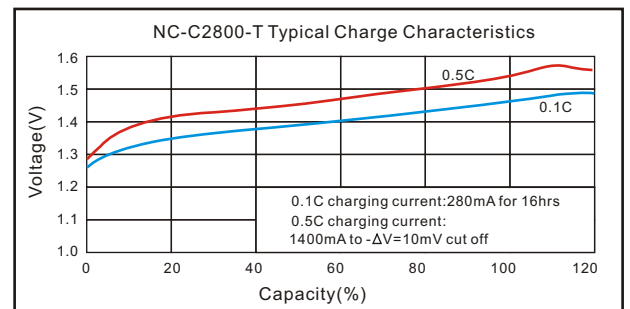

Note: *Typical values relative to cells stored for less than 3 months or less at 30°C max.

*After charging at 0.1C for 16 hours.

*We recommend cells or batteries are charged once every 3 months.

Note: Any representations in this brochure concerning performance, are for informational purposes only and are not construed as warranties either expressed or implied, of future performance.