



CABLE CLAMP FOR FLEXIBLE CABLES

SQUARE FLANGE JACK

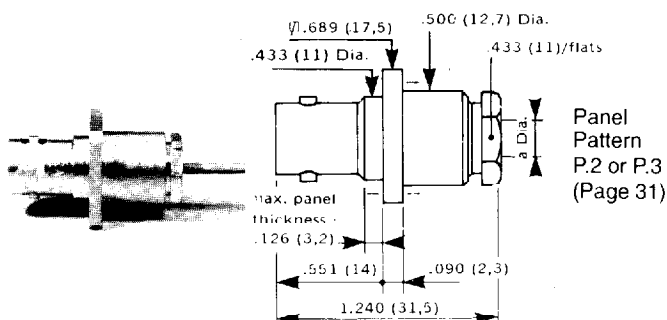


CABLE DIA. Ω	$\varnothing 17.689$ (17,5) 50	$\varnothing 12.7$ (12,7) 50 + 75	$\varnothing 10.2$ (2,6) 50 + 75
PART NUMBER	R 141 253	R 141 254	R 141 278
a dia. max.	.087 (2,2)	.116 (2,95)	.116 (2,95)
Captive contact	YES	YES	YES
Flange holes	4 holes N° 3.56 UNF.2B (M2,5 x 0,45)		4 holes .102 dia ($\varnothing 2,6$)
Assembly	M 04	M 04	M 04

SQUARE FLANGE JACK

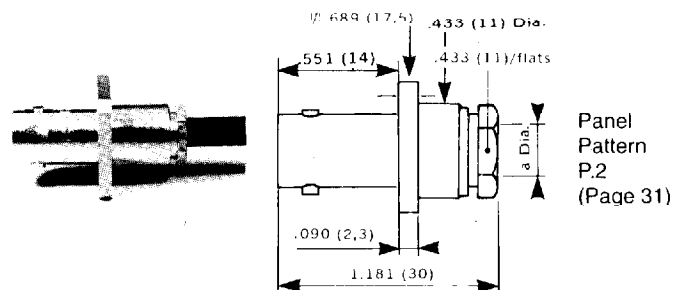


CABLE DIA. Ω	$\varnothing 17.689$ (17,5) 50 + 75	$\varnothing 11$ (11) 50	$\varnothing 10.2$ (2,6) 75 + 93
PART NUMBER	R 141 255	R 141 257	R 141 261
Equival. MIL		UG. 291/U	UG. 262/U
a dia. max.	.146 (3,7)	.220 (5,6)	.256 (6,5)
Captive contact	NO	NO	NO
Flange holes	4 holes N° 3.56 UNF.2B (M 2,5 x 0,45)		
Assembly	M 01	M 01	M 01

SQUARE FLANGE JACK

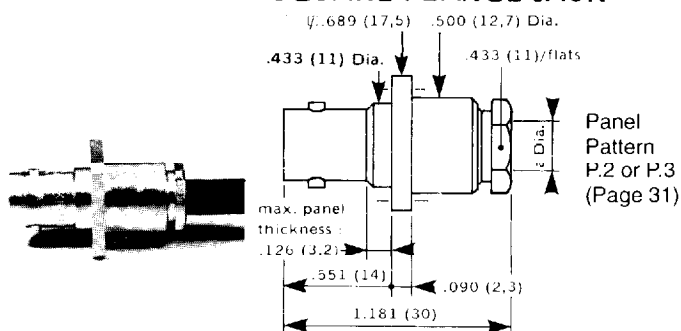

CABLE DIA. Ω	$\varnothing 17.689$ (17,5) 50	$\varnothing 12.7$ (12,7) 75 + 93	$\varnothing 10.2$ (2,6) 75 + 93
PART NUMBER	R 141 258	R 141 259	R 141 262
Equival. MIL	UG. 291 C/U		UG. 262 C/U
Equival. NF	KBN 3		KBN 13
a dia. max.	.220 (5,6)	.220 (5,6)	.256 (6,5)
Captive contact	NO	NO	NO
Flange holes	4 holes N° 3.56 UNF.2B (M 2,5 x 0,45)	4 holes .102 dia. ($\varnothing 2,6$)	4 holes N° 3.56 UNF.2 (M 2,5 x 0,45)
Assembly	M 02	M 02	M 02

INSULATED SQUARE FLANGE JACK

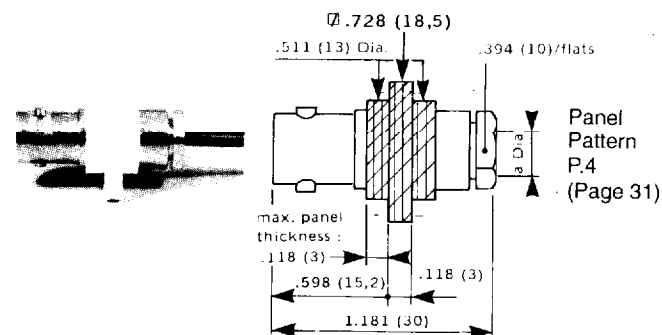


CABLE DIA. Ω	$\varnothing 10.2$ (2,6) 50 + 75
PART NUMBER	R 141 277
a dia. max.	.116 (2,95)
Captive contact	YES
Flange holes	4 holes .102 dia ($\varnothing 2,6$)
Assembly	M 04

CABLE CLAMP FOR FLEXIBLE CABLES

INSULATED SQUARE FLANGE JACK

CABLE DIA. Ω	.197 (5) 50	.236 (6) 75 + 93
PART NUMBER	R 141 256	R 141 264
a dia. max.	.220 (5,6)	.256 (6,5)
Captive contact	NO	NO
Flange holes	4 holes .102 dia. (Ø2,6)	
Assembly	M 01	M 01




Panel
Pattern
P.4
(Page 31)



STRAIGHT BULKHEAD JACK

CABLE DIA. Ω	.102 (2,6) 50 + 75
PART NUMBER	R 141 304
a dia. max.	.116 (2,95)
Captive contact	YES
Assembly	M 04

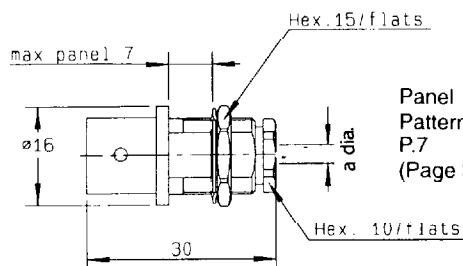


Panel
Pattern
P.7
(Page 31)



STRAIGHT BULKHEAD JACK WITH PANEL SEAL

CABLE DIA. Ω	.079 (2) 50	.102 (2,6) 50 + 75
PART NUMBER	R 141 323	R 141 324
a dia. max.	.087 (2,2)	.116 (2,95)
Captive contact	YES	YES
Assembly	M 04	M 04

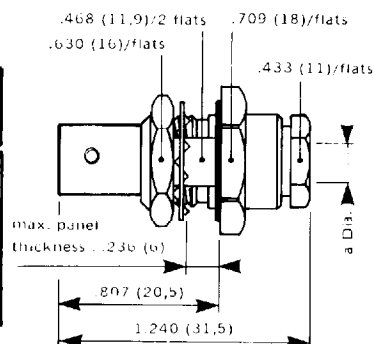


Panel
Pattern
P.7
(Page 31)



STRAIGHT BULKHEAD JACK WITH PANEL SEAL

CABLE DIA. Ω	.197 (5) 50	.236 (6) 75 + 93
PART NUMBER	R 141 327	R 141 329
a dia. max.	.220 (5,6)	.260 (6,6)
Captive contact	NO	NO
Assembly	M 02	M 02

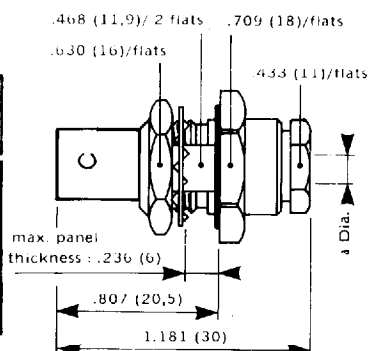

Panel
Pattern
P.7
(Page 31)

