



Series 675 DIP Program Headers

FEATURES:

- Aries DIP programmable headers offer unusual versatility for programming within the header itself.
- They can be individually programmed using cutters or Aries' programming tool, Part No. T-675, available separately, to remove the interconnecting sections. Consult Data Sheet No. 22002 for Aries' programming tool.
- Adjacent and/or opposing pins are interconnected until the pre-slotted section is programmed out. An almost infinite number of programs can be attained by merely leaving or removing interconnecting sections.
- A low profile, snap-on cover protects header from dirt or accidental damage, and can be marked to identify the program within the header.

SPECIFICATIONS:

- Standard header body and cover are red UL 94-HB Glass-filled Nylon.
- Hi-temp. header body and cover are black UL 94V-0 4/6 Nylon.
- Pins are Brass Alloy, 3/4 hard.
- Pin plating is either 100µ [2.54µm] Tin per MIL-T-10727 or 10µ [.25µm] Gold per MIL-G-45204 over 50µ [1.27µm] min. Nickel per QQ-N-290.
- Current rating=2 Amps.
- Operating temperature=221°F [105°C] Tin plating, =257°F [125°C] Gold plating.



MOUNTING CONSIDERATIONS:

- Suggested PCB hole size=.035 ± .002 [.89 ± .05] dia.

ALL DIMENSIONS: INCHES [MILLIMETERS]


"A"=(NO. OF PINS PER ROW X .100 [2.54]) + .050

"B"=(NO. OF PINS PER ROW - 1) X .100 [2.54]

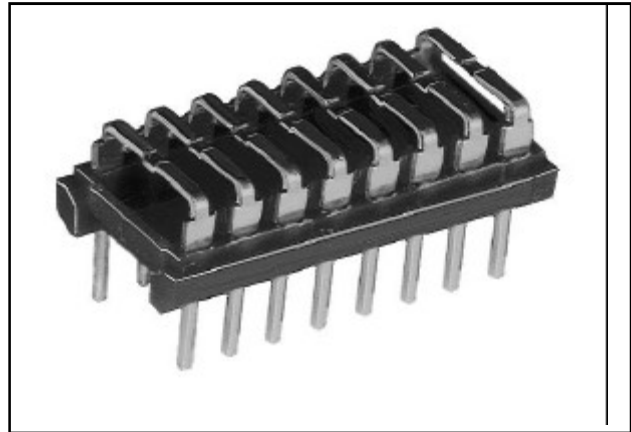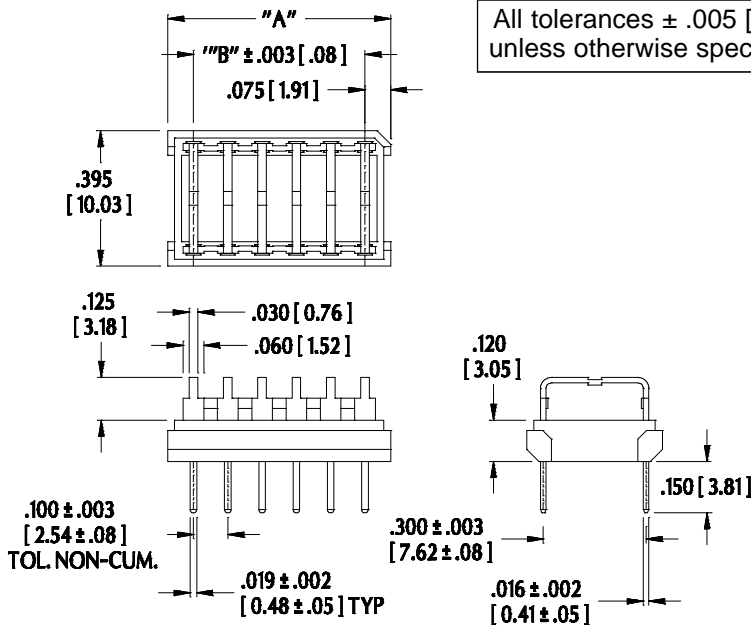

Note: Aries specializes in custom design and production. In addition to the standard products shown on this page, special materials, platings, sizes, and configurations can be furnished, depending on quantities. Aries reserves the right to change product specifications without notice.

ORDERING INFORMATION

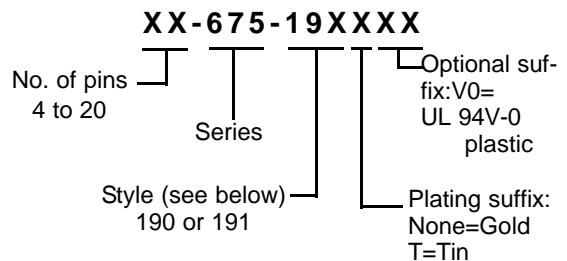

STYLE 190

All pins interconnected, both adjacent and opposing.

Available in 4-16 pins only.

STYLE 191

Opposing pins interconnected only.

Available in 4-20 pins.

Covers available for 4-20 pin headers. To order, specify Part No. **XX-650-10 or 10V0** where "XX" denotes the number of pins. Consult Data Sheet No. 12033 for additional details.

ARIES
ELECTRONICS, INC.
http://www.arieselec.com • info@arieselec.com

NORTH AMERICA
Frenchtown, NJ USA
TEL: (908) 996-6841
FAX: (908) 996-3891



EUROPE
TEL: +44 870 240 0249
FAX: +44 871 919 6033
europe@arieselec.com

16004
REV.B