

SRD4-EL=GDT90VAC5KA

- 4 Connections
- With electronic components



A Phoenix Mecano Brand


Technical Data

Wire sizes		Insulating Material	
Solid min	0.2 mm ²	Material	PA 6.6
Solid max	4.0 mm ²	Flammability Class	UL 94 V-2
Stranded (flexible) min	0.2mm ²	Temperatures	
Stranded (flexible) max	4.0 mm ²	Working Temperature	-40 - 105 °C
Stranded with Ferrule min	0.2 mm ²	Dimensions	
Stranded with Ferrule max	4.0 mm ²	Stripped Length	9.0 mm
Clamping Range min	0.2mm ²	Width	12.0 mm
Clamping Range max	4.0 mm ²	Length	60.2 mm
		Height TS35 x 7.5	61.0 mm
		Height TS32	65.5 mm


Electrical Data

General		Dimensions	
Resistance	Gasableiter	Rated Wire Size	4.0 mm ²
Electronic Components		AWG Rated Wire Size	AWG 22-12
Rated Voltage AC	90 V		
Rated Current	10 A		
Rated Leakage Current	5 kA		

Colours

 BEIGE, similar RAL 1019

Connection Diagram

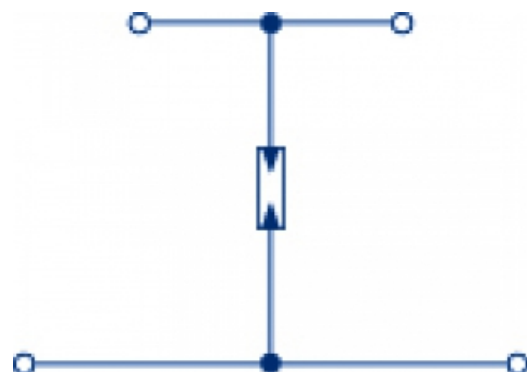

Order Data

Article Designation	Article Number	PU
SRD4-EL=GDT90VAC5KA-BEIGE	41033.2	50

Accessoires

Article Designation	Article Number	PU
End Plate AP4	492101.2	20
Insulation Plates TRS3	492566.2	100
Socket Plug STB8.5/2.3	492075.0	50
Test Plug PS2.3	492007.0	20
Cross-Connection uninsulated Q2	492087.0	50
Cross-Connection uninsulated Q3	492088.0	50
Cross-Connection uninsulated Q4	492089.0	20
Cross-Connection uninsulated Q10	492090.0	10
End Stopn ES35/K/ST	492828.0	50
Quick Labelling PSB6/50	494702.7	500