

Surface Mount TCXO




Series **CTX4**

- 4.0 mm Max height
- Eutectic reflow soldering possible

Specifications:

Frequency Range:	12.000 ~ 19.680 MHz		
Stability Vs. Temperature:	±2.5 ppm	-30°C ~ +75°C	
Aging:	±1.0/Year	(+25°C)	
Vs. Supply Voltage:	±0.3 ppm	(+3.0V ± 5%)	
Power Supply Voltage:	+3.0V	See table below.	
Input Current:	2 mA Max (No Load)		
Storage Temperature:	-40°C ~ +85°C		
Output Voltage:	1.0 V _{P-P} Min		
Load:	10,000Ω // 10 pF		
Frequency Trimming Range:	±3.0 ppm Min		

CTX4

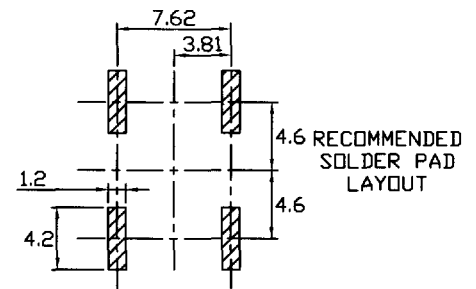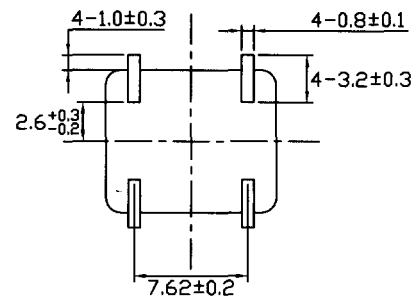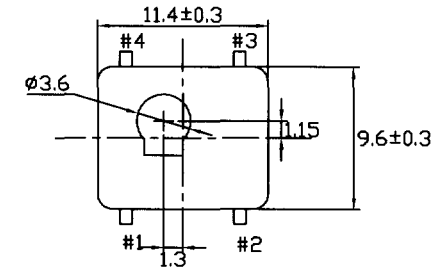

Pin Configurations

1	NC
2	GND
3	Output
4	Vcc

Power Supply Voltage

A	5.0 V
B	4.0 V
C	3.7 V
D	3.3 V
E	3.0 V