


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

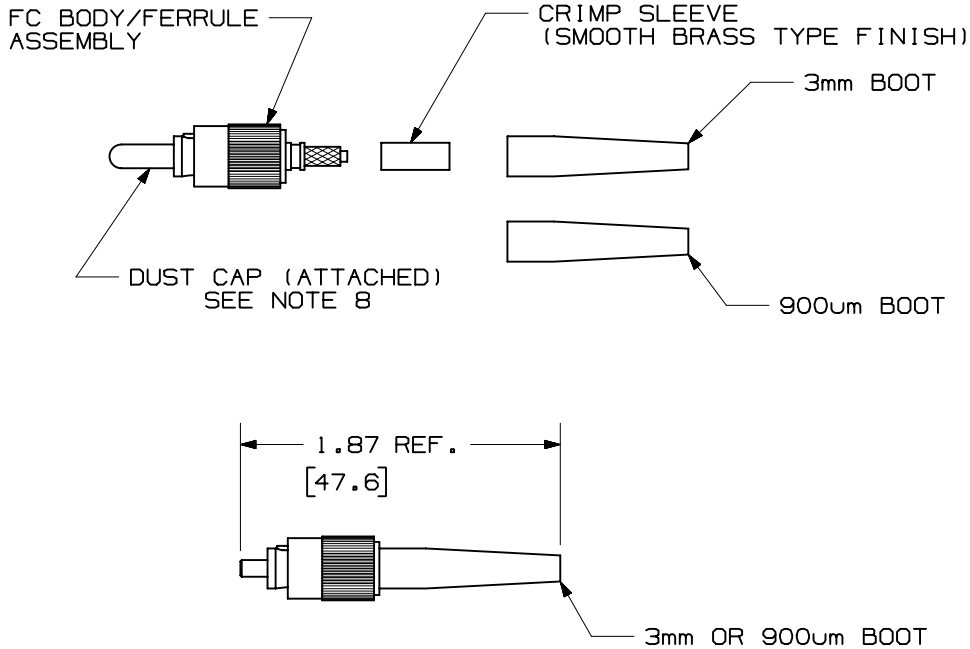

PANDUIT P/N	WEIGHT
FFCSBU	1.00 LB/100 PCS (454.54g/100 PCS)

NOTES:

1. SEE CURRENT CATALOG FOR ADDITIONAL PART NUMBER SUFFIXES TO INDICATE COLOR AND OR PACKAGE QUANTITY.
2. ACCEPTS 9/125 MICRON SINGLEMODE GLASS OPTICAL FIBER.
3. THE MAX. INSERTION LOSS PER CONNECTOR IS 0.75dB. OPERATING TEMP. RANGE IS FROM -40° TO 70°.
4. FULLY COMPLIES WITH THE FIBER OPTIC CONNECTOR PERFORMANCE REQUIREMENTS AS SPECIFIED IN TIA/EIA-568-A.
5. DIMENSIONS IN BRACKETS [mm] ARE IN METRIC.
6. MATERIAL:
BODY/HARDWARE: NICKEL PLATED ZINC
BOOT: THERMOPLASTIC RUBBER
FERRULE: ZIRCONIA CERAMIC
7. FERRULE DIAMETER: 2.4985/2.4995mm.
8. SHAPE OF DUSTCAP MAY VARY.

MODEL FILENAME	M00748AA_FCASSY_00.PRT
CAD FILENAME/LAYERS	M00748AB_DC_00A.PRT

PANDUIT CORP. TINLEY PARK, ILLINOIS

FC SIMPLEX SINGLEMODE CONNECTOR
(FFCSBU)
CUSTOMER DRAWING

UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE:
(.X) ±.06(1.5)(.XXX) ± .010(.3)
(.XX) ±.03(.8) ANGLES ±

UNLESS OTHERWISE SPECIFIED,
ALL DIMENSIONS ARE GIVEN
IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY EFK	MAT'L:	SCALE FULL
DATE 06-05-00	SEE NOTES	DRAWING NO. 00748-03
CHK'D		DWG A SIZE

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
R	06-05-00	EFK		RELEASED FOR PRODUCTION	00748-03				