

### General Description

The MIC10939, MIC10942, and MIC10943 Dot Matrix Display Controller is a three-chip MOS/LSI general purpose display controller system designed to interface to dot matrix displays (vacuum fluorescent or LED).

The three-chip set will drive displays with up to 46 anodes (dots) and up to 20 grids (characters) plus a cursor. The chips can be cascaded to drive larger displays of up to 80 characters.

An internal PLA-type decoder provides character decoding and dot pattern generation for the full 96-character ASCII set and an additional 32 special characters.

*Micrel has received the rights from Rockwell International to manufacture and market this product and reproduce the specifications, including references to Rockwell.*


### Features

- 20-character display driver cascadable to 80 characters
- Standard 5 × 12 character font
- Separate cursor driver output
- Two 128 × 23 PLAs provides segment decoding for full 96-character ASCII set, plus 32 special characters
- Serial or parallel data input for 8-bit display mode controls
- Brightness, refresh rate, and display mode controls
- 40-pin DIP or 44-pin PLCC (MIC10939)
- 28-pin DIP (MIC10942 and MIC10943)

### Ordering Information

| Part Number   | Temperature Range | Package      |
|---------------|-------------------|--------------|
| MIC10939J-50  | 0°C to +70°C      | 44-Pin PLCC  |
| MIC10939P-50  | 0°C to +70°C      | 40-pin P-DIP |
| MIC10939PE-50 | -40°C to +85°C    | 40-pin P-DIP |
| MIC10942P-50  | 0°C to +70°C      | 40-pin P-DIP |
| MIC10942PE-50 | -40°C to +85°C    | 40-pin P-DIP |
| MIC10943P-50  | 0°C to +70°C      | 40-pin P-DIP |
| MIC10943PE-50 | -40°C to +85°C    | 40-pin P-DIP |

### Block Diagram

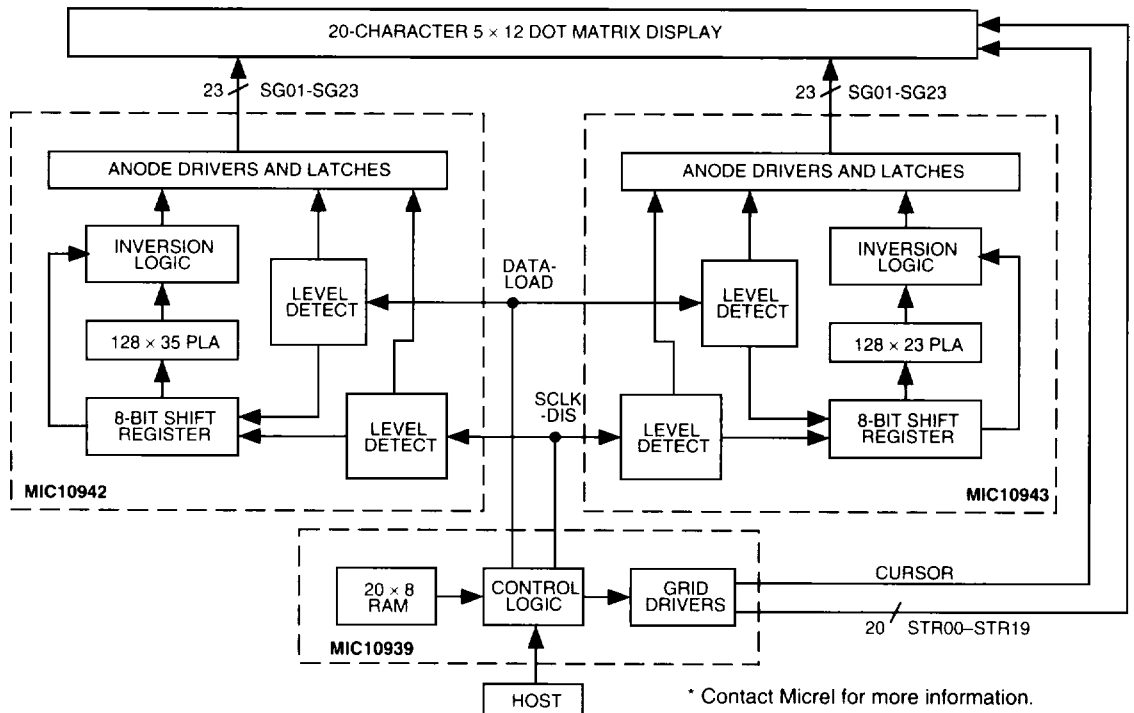

\* Contact Micrel for more information.