DWG. NO. : 7246-2-1

CAD# 7246

REF:

USED ON:

PROJECT NO.

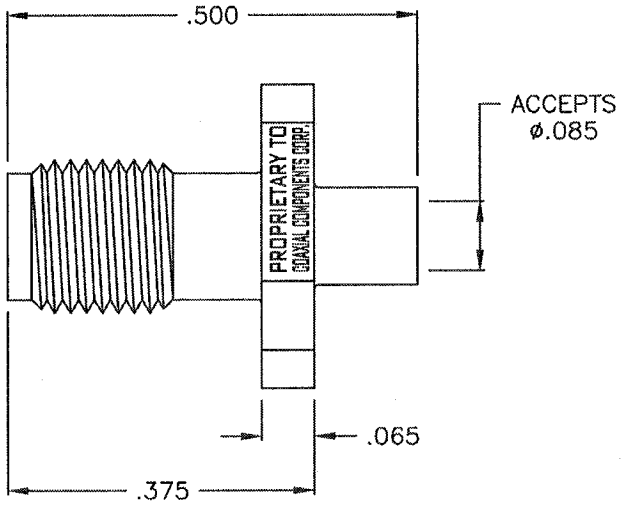

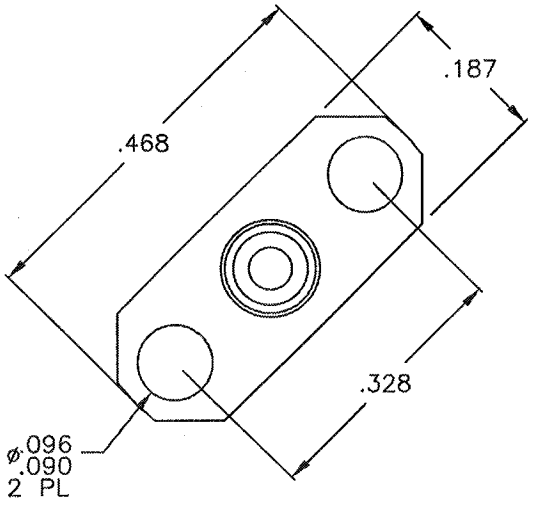

SPECIFICATIONS:

CONSTRUCTION

MATERIALS

BODY:
STAINLESS STEEL PER
ASTM-A582, TYPE 303

DIELECTRIC INSULATOR:
TEFLON PER ASTM-D-1710

CONTACT:
BERYLLIUM COPPER PER
ASTM-B-196, COND H, ALLOY 173

FINISH

BODY:
GOLD PER MIL-PRF-39012

BODY & CONTACT:
GOLD PER MIL-G-45204

ELECTRICAL

IMPEDANCE -------- 50Ω

FREQUENCY RANGE -- DC TO 18 GHz

MECHANICAL

INTERFACE:
SSMA JACK PER MIL-STD-348A 319.2

ENVIRONMENTAL

TEMPERATURE RATING - 65°C to +165°C

MEETS APPLICABLE PARAGRAPHS OF
MIL-STD-202

LTR	REVISION RECORD	DCN	DR / CHK	DATE
-	Release	---	RF	1/13

GENERAL TOLERANCES: DIMENSIONS ARE IN INCHES

DECIMALS		FRACTIONAL	ANGULAR	
.X	±.030	± 1/64	X°	±1°0'
.XX	±.015		X°X'	±15'
.XXX	±.005			

DIMENSION CLASSIFICATION
( ) : REFERENCE ☐ : MINOR
☒ : MAJOR ■ : CRITICAL

CODE IDENT. 66702

DRAWN BY : RF 1/13
CHK'D BY :
APP'D BY : RF 1/13

UNIT : inches | SCALE: 4:1

SHEET 1 OF 1

COAXIAL COMPONENTS CORP.

TITLE :
SSMA STRAIGHT JACK
FOR .085 SEMI-RIGID CABLE

DWG. NO. : 7246-2-1 | REV -

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO COAXIAL COMPONENTS CORP. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION