
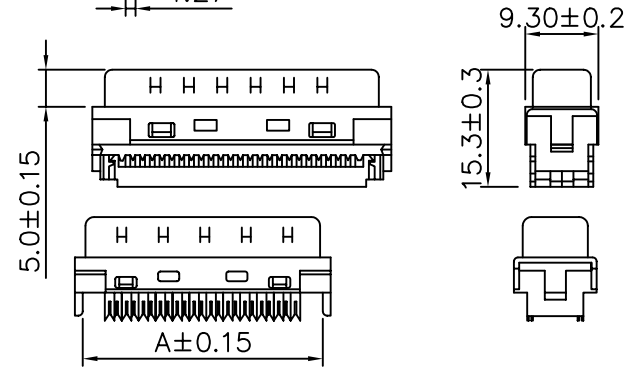






SPECIFICATION

Current Rating: 1A
 Insulation Resistance : 500 Megohms/Min.
 Withstanding Voltage : 500V AC/RMS For 1 Minute
 Contact Resistance : 35 Milliohms Max.
 Temperature Range : -55°C To +105°C
 Housing And Cover: Plastic Thermoplastic
 P.B.T UL 94V-0, Black
 Contact: Phosphor Bronze Gold Selective Plated
 Front Shell : Steel, Nickel Plated Over Copper
 Back Shell: Zinc Plated Nickel Over Copper
 Jackscrew : Steel Nickel Plated Over Copper
 Screw : Steel Nickel Plated Over Copper
 Cable Clipper: Steel Nickel Plated

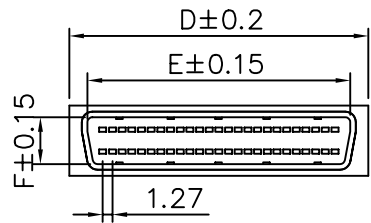

Circuits	A	B	C	D	E	F	G	H	I	J
40	30.95	31.85	27.75	32.95	28.50	5.70	24.90	46.60	38.70	20.30
50	37.30	39.20	34.10	39.30	34.85	5.70	31.80	53.10	38.20	19.80
68	48.70	50.73	45.53	50.60	43.35	5.80	42.40	63.80	38.20	19.80

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY Half Pitch		APPROVED BY MEI		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X .XX AWG.
PART No. HPDXXXPFM		CHECKED BY RAN		
DRAWING No. HPDXXXPFM		DRAWING BY LXH		
SCALE NONE	REV. A	UNIT mm		

AREA	REVISIONS	CHK	DATE