


| | | |
|----------|--------|-----------|
| DASH NO. | M CODE | MADE FROM |
|----------|--------|-----------|

GSD

1705-16-11

REVISIONS

| ISSUE | CHANGES |
|-------|-------------------------|
| 0 | ER 36931 KH 04/22/96 |

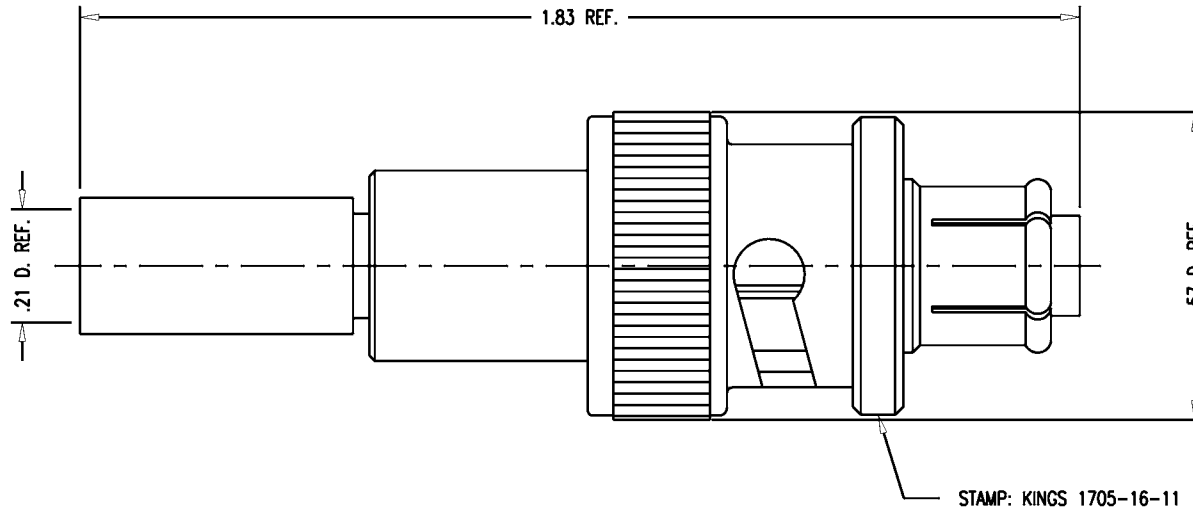

NOTES:

1. FOR USE WITH C 9Y19503 CABLE.
2. FOR CABLING INSTRUCTIONS SEE CP-441.
3. FOR CRIMPING USE DIE KTH-2062.
4. INTERFACE PER MIL-STD-348, FIGURE 314-2.
5. MATERIALS:
 INSULATOR: REXOLITE, L-P-516
 GASKET: SILICONE RUBBER, ZZ-R-765
 K-GRIP SLEEVE: COMMERCIAL BRONZE, ASTM-B-135
 SPRING WASHER & CONTACTS: BER. COP., ASTM-B-196
 ALL OTHER PARTS: BRASS, ASTM-B16
6. FINISHES:
 CENTER CONTACT: GOLD PLATE PER MIL-G-45204
 SPRING WASHER: SILVER PLATE PER QQ-S-365
 ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT NICKEL FINISH (TR-5)
7. ELECTRICAL CHARACTERISTICS:
 OPERATING VOLTAGE: 3500 VOLTS AC
 6000 VOLTS DC

KAM6567

SCALE 4:1

APPROX SURFACE AREA

USED ON

REF: ROMTRONIX P.O. # 27293

PLUG, SHV

DRAWN KH DATE 04/22/96

DESIGN LI DATE 04/23/96

APPR. DATE

KINGS
 ELECTRONICS CO., INC.
 TUCKAHOE, NEW YORK 10707

1705-16-11

GSD