


3632A680MT Product Details

[Live Product Chat](#)

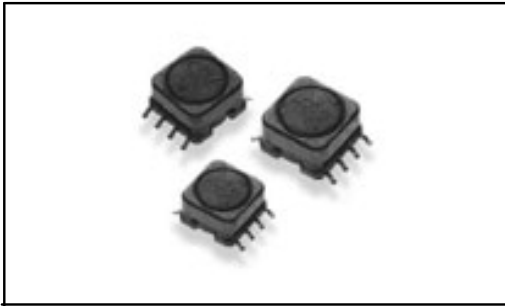

3632A680MT
(3-1676944-6)

TE Internal Number: 3-1676944-6

[Active](#)

Inductors

[Converted to EU RoHS/ELV Compliant \(Statement of Compliance\)](#)

Product Highlights:

- Inductor
- Inductor Type = Shielded Power Wirewound
- Lead Type = Surface Mount Terminals
- Wirewound
- Inductance = 68 ?H

[View all Features](#)

Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

[Add to My Part List](#) [Request Sample](#) [Find Similar Products](#) [Buy Product](#)

Documentation & Additional Information

<p>Product Drawings:</p> <ul style="list-style-type: none"> • SHIELDED SMD POWER INDUCTOR SERIES 3632A (PDF, English) <p>Catalog Pages/Data Sheets:</p> <ul style="list-style-type: none"> • Shielded SMD Power Inductor - Type 3632 Series - Tyc... (PDF, English) <p>Product Specifications:</p> <ul style="list-style-type: none"> • None Available <p>Application Specifications:</p> <ul style="list-style-type: none"> • None Available <p>Instruction Sheets:</p> <ul style="list-style-type: none"> • None Available <p>CAD Files:</p> <ul style="list-style-type: none"> • None Available 	<p>Additional Information:</p> <ul style="list-style-type: none"> • Product Line Information <p>Related Products:</p> <ul style="list-style-type: none"> • Tooling
--	--

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

<p>Product Type Features:</p> <ul style="list-style-type: none"> • Product Type = Inductor • Inductor Type = Shielded Power Wirewound • Element = Wirewound • Shielded = Yes <p>Electrical Characteristics:</p> <ul style="list-style-type: none"> • Inductance (?H) = 68 • DC Resistance (?) = 0.35 • Current, Maximum (mA) = 850 • Quality Factor = 40 • Package Type = Taped and Reeled • Tolerance (%) = 20 <p>Body Related Features:</p> <ul style="list-style-type: none"> • Lead Type = Surface Mount Terminals • Series = 3632 • Package, Component Size = 9.5 x 10.5 • Mount Style = Surface Mount 	<p>Industry Standards:</p> <ul style="list-style-type: none"> • RoHS/ELV Compliance = RoHS compliant, ELV compliant • Lead Free Solder Processes = Reflow solder capable to 245?C, Reflow solder capable to 260?C • RoHS/ELV Compliance History = Converted to comply with RoHS directive <p>Operation/Application:</p> <ul style="list-style-type: none"> • Application = Power Circuitry <p>Other:</p> <ul style="list-style-type: none"> • Brand = Sigma Inductors
--	---

[Provide Website Feedback](#) | [Need Help?](#)