

F-SMA series

CONNECTORS

Connectors dimensions and
admissible cables diameters

Silica/silica fiber sizes

HCS type fiber sizes

125 μ m

140 μ m


280 μ m

200/230

400/430

Tube 1.1 mm dia. or buffered fiber to 1.1 mm max


F-SMA 5 F 707 024 000 F 707 025 000 F 707 026 000

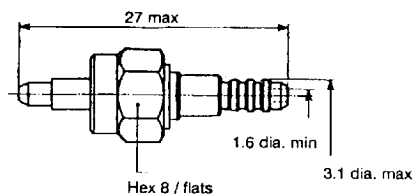

F-SMA 6 F 708 016 000 F 708 017 000 F 708 018 000

Tight or loose structure cable
1.6 to 2.6 mm dia. max
Tube 1.6 mm dia max


F-SMA 5 F 707 031 000 F 707 032 000 F 707 033 000 F 707 047 000 F 707 048 000

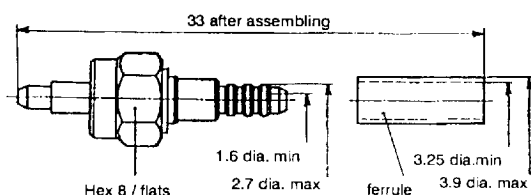

F-SMA 6 F 708 024 000 F 708 025 000 F 708 026 000

Tight or loose structure cable
2.7 to 3.5 mm dia. max
(accepts intermediate jacket of 1.57 mm dia. or less)


F-SMA 5 F 707 027 000 F 707 028 000 F 707 029 000 F 707 049 000 F 707 050 000

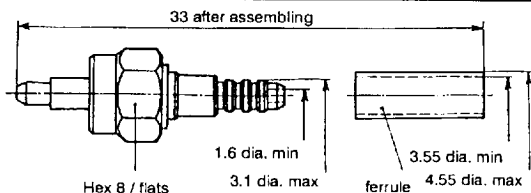

F-SMA 6 F 708 019 000 F 708 020 000 F 708 021 000

Tight or loose structure cable
3.1 to 4.4 mm dia. max
(accepts intermediate jacket of 2.54 mm dia. or less)


F-SMA 5 F 707 021 000 F 707 022 000 F 707 030 000

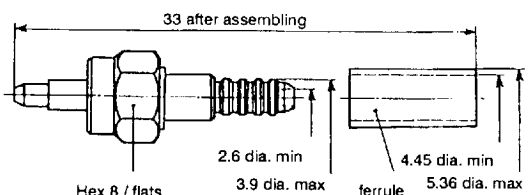

F-SMA 6 F 708 012 000 F 708 013 000 F 708 022 000

Tight or loose structure cable
5 mm dia. max

F-SMA 5 F 707 012 000 F 707 003 000 F 707 023 000

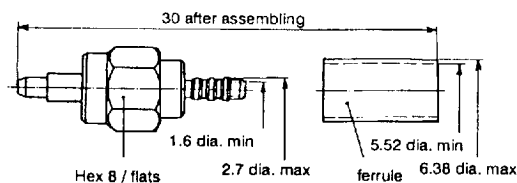

F-SMA 6 F 708 005 000 F 708 006 000 F 708 023 000

Note : Buffered fiber 1.1 mm dia. max
Delivered with plastic boot