
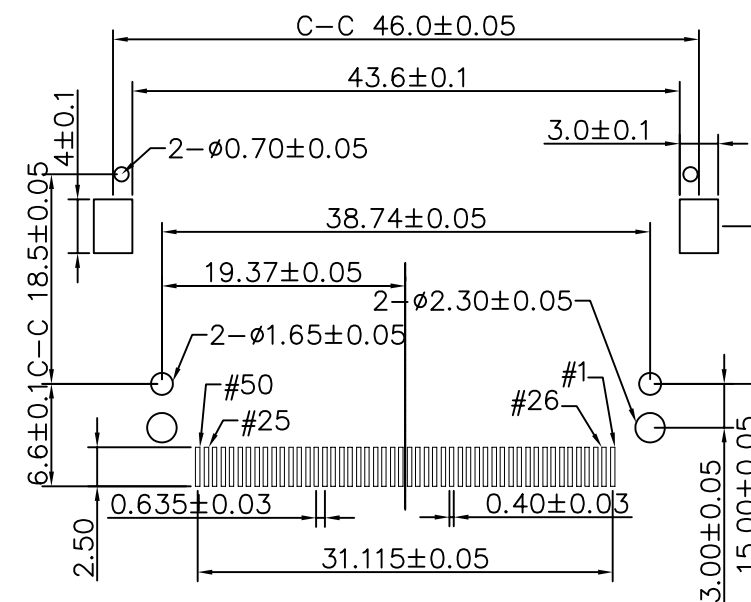
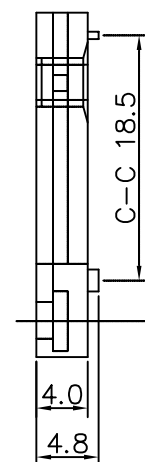


## SPECIFICATIONS:

Insulator : Glass Reinforced LCP UL 94V-0  
Contacts : Brass Alloy  
Mount ear : Brass Tin Plated Overall  
Contact Plating :  
Contact area : 5u" Selective Gold Over Nickel Plating  
Solder tail area : 100u" Tin Plating Over 40u" Nickel

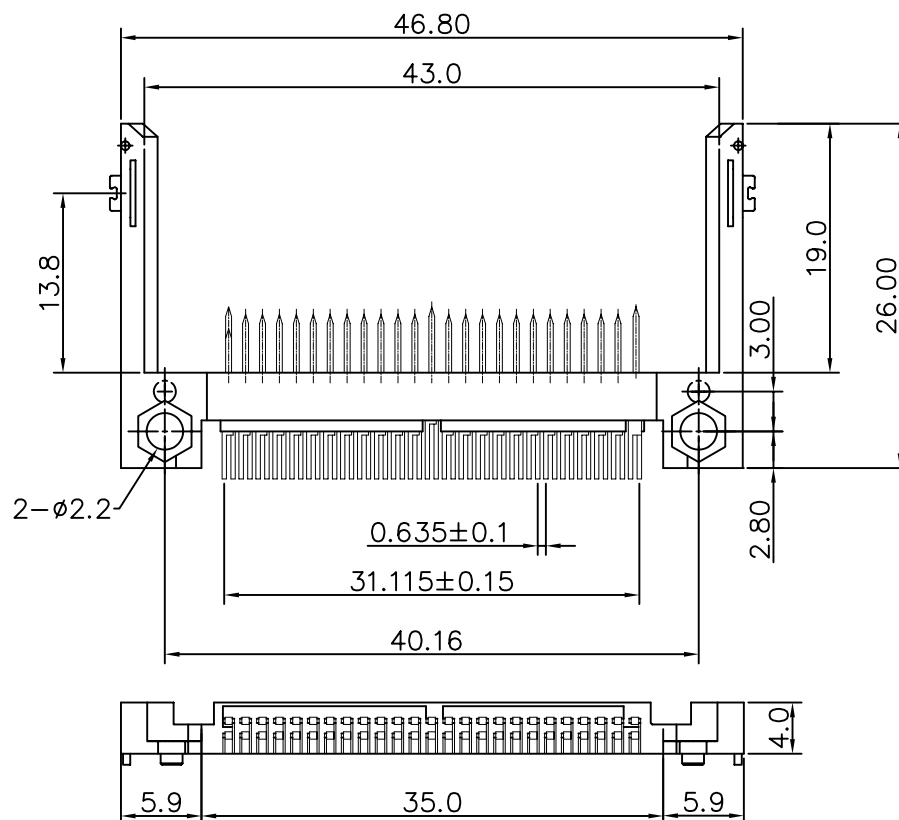

Recommended P.C.B Layout

**AUK** A NUMBER OF AUK GROUP  
**太聯事業股份有限公司**  
AUK CONTRACTORS CO., LTD.

DRAWING No.  
CFC50PW001  
S36P

APPROVED BY MEI  
CHECKED BY BECKY  
DRAWING BY HZF

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE  
.X ±0.3  
.XX ±0.2  
ANG.

SCALE NONE

REV. A0

UNIT mm



NO. REV.

A0 NEW RELEASE

REVISIONS

MEI

DATE