


1103-305-A00E-*

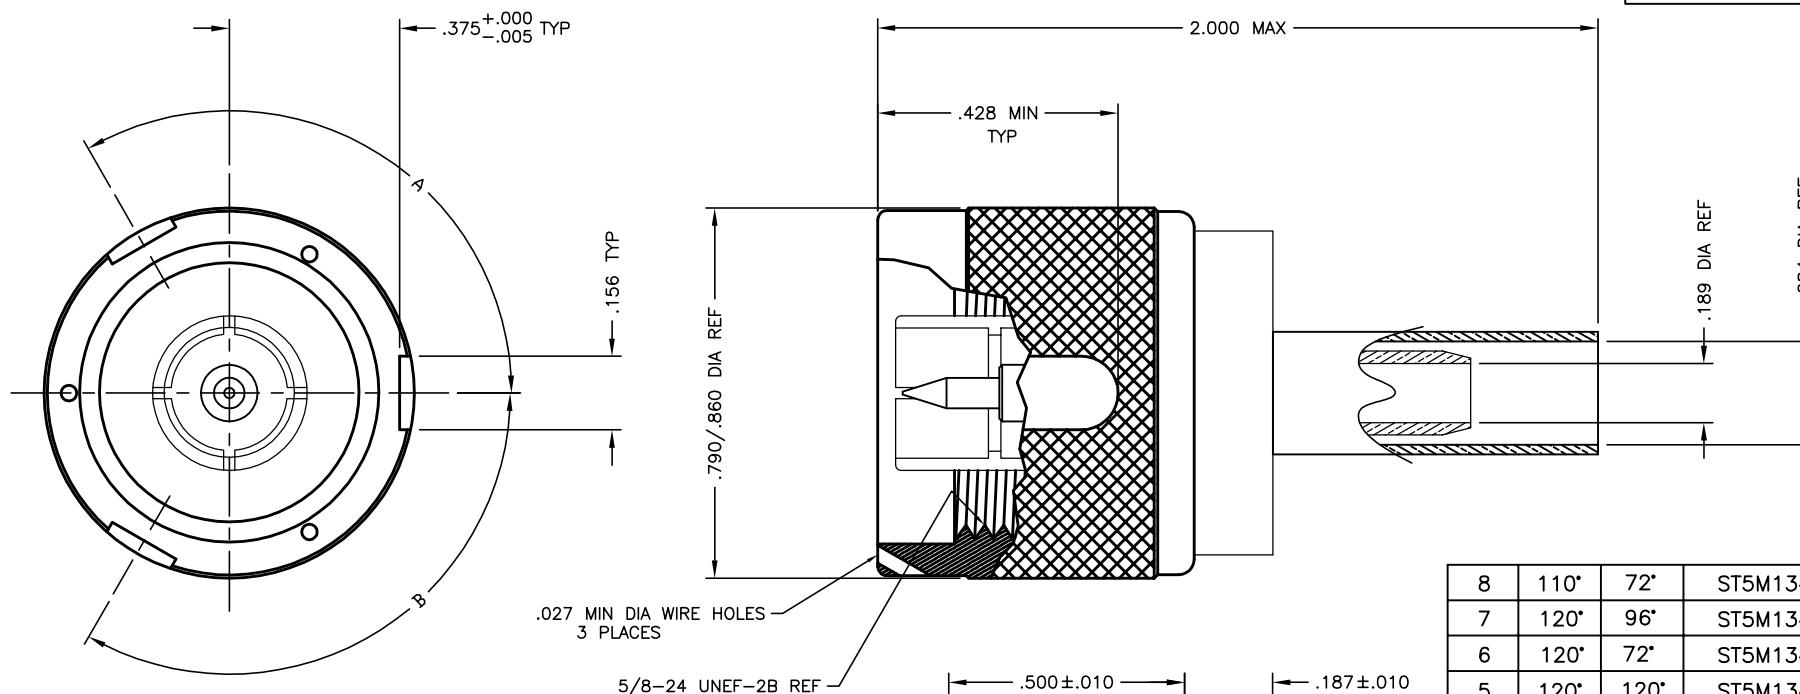

NOTES:

1. INTERFACE IS IN ACCORDANCE WITH MIL-STD-348.
2. MATERIALS AND FINISHES:
HOUSING, NUT: BRASS, SILVER-PLATED
CONTACT: BRASS, GOLD-PLATED
INSULATORS: TEFLON PTFE
RETAINING RING: PHOSPHOR BRONZE
GASKET: SILICONE RUBBER
FERRULE: COPPER, SILVER-PLATED
3. CONTACT CABLE ENTRY: $.072$ DIA REF
4. RECOMMENDED FERRULE CRIMP TOOL:
M22520/5-43, CLOSURE A, $.268$ HEX DIE
5. RECOMMENDED CONTACT CRIMP TOOL:
BASIC TOOL M22520/1-01, SELECTOR No. 7;
TURRET M22520/1-13 (GREEN).
6. DELTA FERRULE No. 61-10008-54-Ni
DELTA CONTACT No. 33-10144-10-Au

TOLERANCES: UNLESS OTHERWISE SPECIFIED;
DECIMALS = $\pm .005$, FRACTIONS = $\pm 1/64$, ANGLES = $\pm 1/2^\circ$
REMOVE ALL BURRS AND SHARP EDGES.

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY
OF DELTA ELECTRONICS MFG. CORP. AND SHALL NOT BE
REPRODUCED, OR COPIED, OR USED AS THE BASIS FOR THE
MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITH-
OUT THEIR EXPRESS WRITTEN CONSENT.

CABLE TRIMMING DIMENSIONS

B	REVISED	9/5/03		
A	NOTE 4: 5-43 WAS 5-19, .268 WAS .255; ADDED NOTES 5 AND 6; .284 DIA REF WAS .261	1/31/95 MCD		
-	OUTLINE	5/16/94		
Alt.	Revisions	Date	ENGR APPD	MFG APPD

FILE NAME: 1103305A000E-*T PLOT @ 4/1

8	110°	72°	ST5M1348NS8G
7	120°	96°	ST5M1348NS7G
6	120°	72°	ST5M1348NS6G
5	120°	120°	ST5M1348NS5G
4	72°	144°	ST5M1348NS4G
3	120°	144°	ST5M1348NS3G
2	96°	96°	ST5M1348NS2G
1	72°	120°	ST5M1348NS1G
00	N/A	N/A	ST5M1348NS0G
*	A	B	MCAIR NUMBER

DELTA ELECTRONICS MFG. CORP. Beverly, MA 01915

TITLE N POLARIZED CABLE PLUG FOR
McDONNELL-DOUGLAS 5M2876-001

MATERIAL	SEE NOTE 2			
FINISH	SEE NOTE 2			
Drawn by MCD	Scale 4X	Chk. by	Mfg. Appd.	Engr. Appd.
5/16/94				

CODE IDENT.-00795 1103-305-A00E-*