




MULTIPLE STUD TERMINALS

Vinyl Insulated Funnel Entry

- Insulation Support

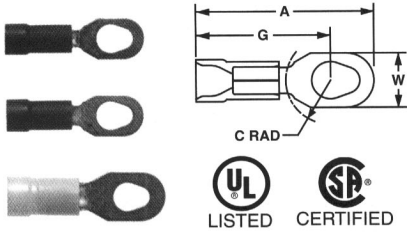


PANDUIT® Part Number	Wire Range	Color Code	Max. Ins.	Stud Size	Dimensions (In.)				Std. Pkg. Qty.	Std. Ctn. Qty.	Bulk Pkg. Qty.	Bulk Ctn. Qty.	Crimp Tools
					A	W	C	G					
PV18-610R-C	22-18 .03" Thick Stock	Red	.150	#6 #8 #10	1.00	.31	.25	.75	100	500	1000	6000	CT-100 CT-600‡ CT-1550‡ CT-1551‡
PV14-610R-C	16-14 .03" Thick Stock	Blue	.170	#6 #8 #10	1.00	.31	.25	.75	100	500	1000	6000	
PV10-610R-L	12-10 .04" Thick Stock	Yellow	.225	#6 #8 #10	1.17	.37	.31	.89	50	500	500	3000	
PT18-4R-C PT18-6R-C PT18-8R-C PT18-10R-C PT18-14R-C	22-18 .03" Stock	Red	.145	#4	.75	.25	.22	.63	100	500	—	—	CT-100 CT-600^ CT-1550^ CT-1551^
#6				.78	.25	.22	.63	100	500	—	—		
#8				.84	.31	.29	.69	100	500	—	—		
#10				.84	.31	.29	.69	100	500	—	—		
1/4"				1.05	.46	.40	.82	100	500	—	—		
PT14-4R-C PT14-6R-C PT14-8R-C PT14-10R-C PT14-14R-C	16-14 .03" Stock	Blue	.162	#4	.75	.25	.22	.63	100	500	—	—	
#6				.84	.31	.29	.68	100	500	—	—		
#8				.84	.31	.29	.68	100	500	—	—		
#10				.84	.31	.29	.68	100	500	—	—		
1/4"				1.05	.46	.40	.82	100	500	—	—		
PT10-6R-L PT10-8R-L PT10-10R-L PT10-14R-L	12-10 .04" Stock	Yellow	.225	#6	1.03	.37	.33	.84	50	500	—	—	
#8				1.03	.37	.33	.84	50	500	—	—		
#10				1.03	.37	.33	.84	50	500	—	—		
1/4"				1.18	.52	.42	.92	50	500	—	—		

RING TERMINALS

TEFZEL* Insulated

- Insulation Grip Sleeve
- Butted Seam with Metal Sleeve
- For Nuclear Containment Areas and High Temperature (to 150°C) Applications
- Color Code: White with One Color Stripe

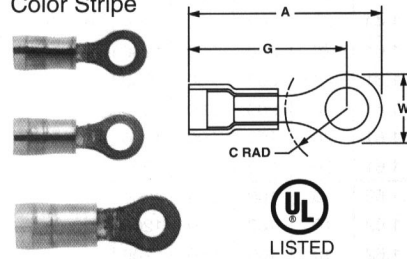

‡ UL and CSA approved tooling/product combinations.
^ UL approved tooling/product combinations.

* TEFZEL® is a registered trademark of E.I. du Pont de Nemours and Company.

Order the number of pieces required in multiples of standard package quantities.


L = 50 pcs., C = 100 pcs., D = 500 pcs. and M = 1000 pcs.

Prime items appear in **BOLD**.

RING TERMINALS HEAVY DUTY

Nylon Insulated

- Insulation Grip Sleeve
- Manufactured from stock 56% thicker than a standard #16-14 AWG terminal
- Designed for use in demanding applications such as construction and electric utilities

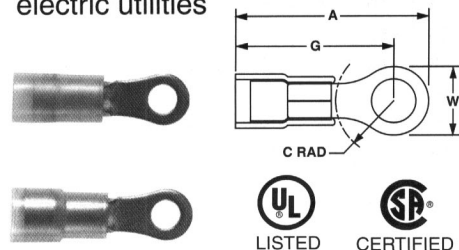

PANDUIT® Part Number	Wire Range	Color Code	Max. Ins.	Stud Size	Dimensions (In.)				Std. Pkg. Qty.	Std. Ctn. Qty.	Bulk Pkg. Qty.	Bulk Ctn. Qty.	Crimp Tools
					A	W	C	G					
PN12-6HDR-L	16-12 .05" Stock	Yellow	.225	#6	1.06	.31	.35	.91	50	500	500	3000	CT-1550‡ CT-1551‡
PN12-8HDR-L				#8	1.06	.31	.35	.90	50	500	500	3000	
PN12-10HDR-L				#10	1.09	.37	.33	.89	50	500	500	3000	
PN12-14HDR-L				1/4"	1.24	.52	.42	.98	50	500	500	3000	
PN12-56HDR-L				5/16"	1.24	.52	.42	.98	50	500	500	3000	
PN12-38HDR-L				3/8"	1.30	.58	.46	1.02	50	500	500	3000	

Order the number of pieces required in multiples of standard package quantities.

L = 50 pcs. and D = 500 pcs.

‡ UL and CSA approved tooling/product combinations.

Prime items appear in **BOLD**.