

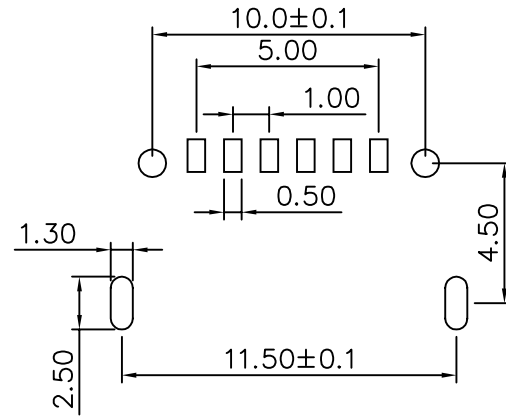


SPECIFICATION:

Current Rating : 1 A
 Dielectric Voltage : 1000V At 1 Minute
 Insulation Resistance: 1000 Megohms Min At 500V
 Contact Resistance : 25 Milliohms Max.
 Operating Temperature : -55°C To +105°C
 Mating Cycles : 1500 Cycles Min.
 Contact : Copper Alloy,Gold Flash
 Insulator :P.B.T. UL 94V-0
 Shell : Copper Alloy,Tin Plated

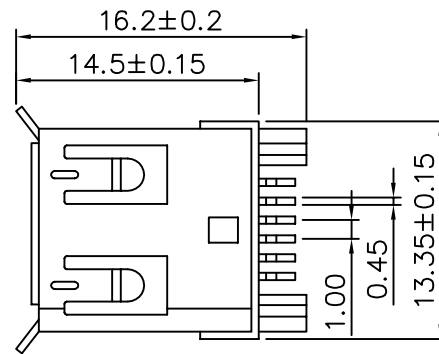

P.C.B. Layout

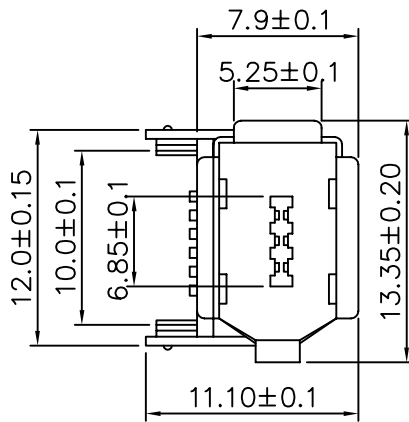

AUK A NUMBER OF AUK GROUP
太聯事業股份有限公司
 AUK CONTRACTORS CO., LTD.

DRAWING No.
 FW2X03SW

APPROVED BY
 MEI
 CHECKED BY
 RAN
 DRAWING BY
 HZF

UNLESS OTHERWISE SPECIFIED
 TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 .XXX

SCALE NONE REV. A UNIT mm

AREA REVISIONS CHK DATE