

TOSHIBA LED DISPLAY

TLG372, TLG373, TLR372, TLR373

5X7 DOT MATRIX LED DISPLAY

- 6.0mm (0.24") Character Height.
- X-Y matrix connection. (Multiplex drive)
- 36 light emitting diodes including decimal point.
- Capable of displaying full ASCII characters.
- Application Keyboard verifier, Computer Peripheral display, Information display.

PRODUCT LINE UP

TLG372/TLG373	GaP GREEN
TLR372/TLR373	GaP RED

MAXIMUM RATINGS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
DC Forward Current / Dot. (Note)	I _{FP} / Dot	30	mA
DC Reverse Voltage / Dot.	V _R	6	V
Operating Temperature Range	T _{opr}	-30~85	°C
Storage Temperature Range	T _{stg}	-30~100	°C

Note : Pulse Width = 1ms, Duty Ratio = 1 / 7

ELECTRICAL-OPTICAL CHARACTERISTICS (Ta = 25°C)

TYPE No.	EMITTING WAVE LENGTH			LUMINOUS INTENSITY I _V / seg			FORWARD VOLTAGE V _F / Dot				REVERSE CURRENT I _R / Dot		LUMINOUS INTENSITY MATCHING RATIO I _{V-M}	
	λ _p	Δλ	I _F /Dot	Min.	Typ.	I _F /Dot	Min.	Typ.	Max.	I _F /seg	Max.	V _R /seg	Max.	I _F /Dot
TLG Series	565	30	20	0.05	0.14	20	1.8	2.15	2.75	20	5	6	2.0	20
TLR Series	700	100	1 / 7	0.03	0.045	1 / 7								1 / 7
UNIT	nm		mA	mcd		mA	V			mA	μA	V	—	mA





PRECAUTION

Please be careful of the following.

- Soldering temperature should be less than 260°C for 7 seconds at 1.5mm from the seating plane.
- With the case-type LED display, cleaning all over may cause cracks in the case.

961001EAA2

● TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.

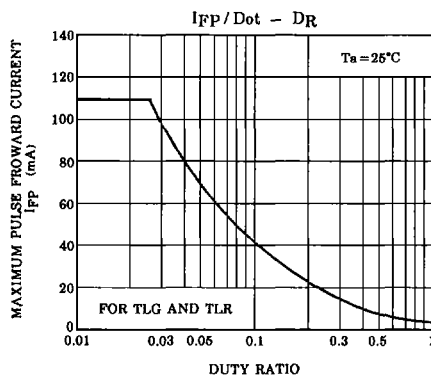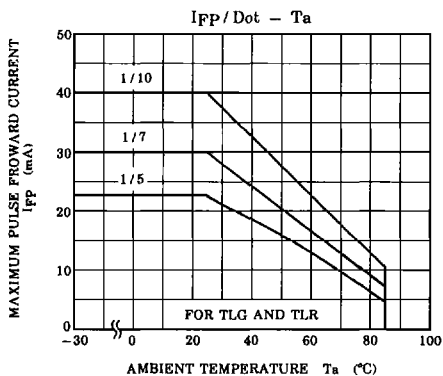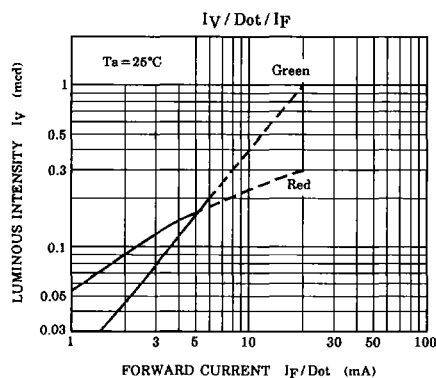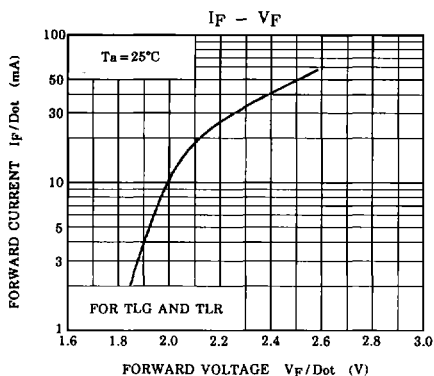


961001EAA2'

- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.


OUTLINE DIMENSIONS

Unit in mm
Tolerance is ± 0.25
Unless otherwise noted

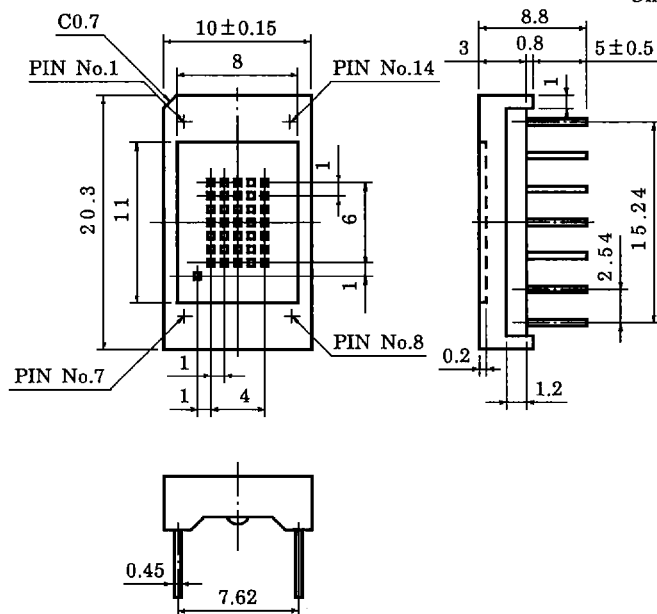


PIN CONNECTION

PIN No.	CONNECTION		PIN No.	CONNECTION	
	TLR372 TLG372	TLR373 TLG373		TLR372 TLG372	TLR373 TLG373
1	Column2 Cathode	Column2 Anode	8	Column3 Cathode	Column3 Anode
2	Row1 Anode	Row1 Cathode	9	Row7 Anode	Row7 Cathode
3	Row3 Anode	Row3 Cathode	10	Row6 Anode	Row6 Cathode
4	Row4 Anode	Row4 Cathode	11	Row5 Anode	Row5 Cathode
5	Column1 Cathode	Column1 Anode	12	Row2 Anode	Row2 Cathode
6	Omitted	Omitted	13	Column5 Cathode	Column5 Anode
7	Decimal Cathode	Decimal Anode	14	Column4 Cathode	Column4 Anode

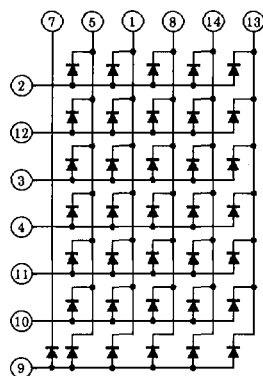

(TLR372 / TLG372)

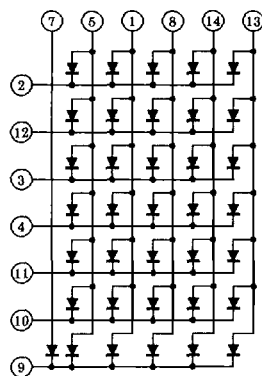

(TLR373 / TLG373)