


Price* : 87.00 GBP

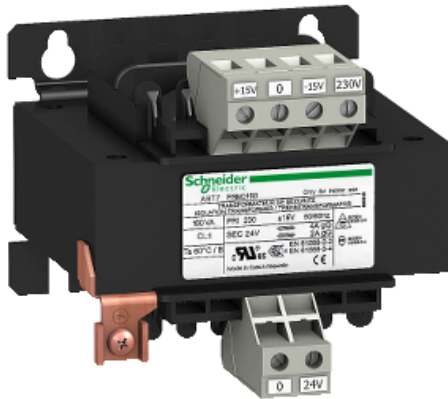

Main

Range of product	Phaseo Economic
Product or component type	Safety and isolation transformer
Rated power in VA	400 VA
Input voltage	230 V AC phase to phase, terminal(s): L1-L2 230 V AC single phase, terminal(s): N-L1
Output voltage	24 V AC
Secondary winding	Single
Protective cover	Without
Ambient air temperature for operation	-20...40 °C

Complementary

Input voltage limits	207...253 V
Network frequency limits	47...63 Hz
Input voltage tolerance	+/- 15 V
Efficiency	90 %
Power dissipation in W	44.4 W
Voltage variation at nominal load	0,0429 at 230 V
Output sustained overvoltage	5 % (no load, hot state)
Maximum voltage drop at rated load	5.75 %
No load losses	19.3 W
Short-circuit voltage	0,055
Output protection type	Against overload, protection technology: external Against overvoltage, protection technology: external Against short-circuits, protection technology: external
Connections - terminals	For input connection: screw type terminals, connection capacity: 4 x 2.5...4 x 4 mm ² AWG 14...AWG 11 For input ground connection: screw type terminals, connection capacity: 1 x 2.5...1 x 4 mm ² AWG 14...AWG 11 For output connection: screw type terminals, connection capacity: 2 x 2.5...2 x 4 mm ² AWG 14...AWG 11
Marking	CE
Fixing mode	By 4 screws diameter: 5 mm on vertical panel, operating position: horizontal By 4 screws diameter: 5 mm on vertical panel, operating position: vertical By 4 screws diameter: 5 mm on horizontal panel with derating to 90 %

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Operating altitude	3000 m
Electrical insulation class	Class B
Width	121 mm
Height	122 mm
Depth	103 mm
Net weight	5.1 kg

Environment

Product certifications	EAC
IP degree of protection	IP20
Environmental characteristic	EMC conforming to EN 62041 Safety conforming to EN 61558-1 Safety conforming to EN 61558-2-6
Ambient air temperature for storage	-40...80 °C
Relative humidity	0...95 % during operation
Overvoltage category	Class I conforming to VDE 0106-1
Dielectric strength	3200 V between input and ground 3200 V between output and ground 5100 V between input and output


Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	Download RoHS China Declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	No need of specific recycling operations

Contractual warranty

Warranty	18 months
----------	-----------

Dimensions

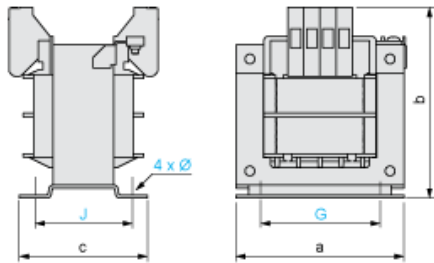


Dimensions in mm

a	b	c	G	J	Ø
121	122	103	90	86	5.8


Dimensions in in.

a	b	c	G	J	Ø
4.76	4.80	4.05	3.54	3.39	0.23

Internal Scheme



Primary Voltage Wiring



Secondary Voltage Wiring

