

LED



T3-1/4(9mm)

MINIATURE (FLANGE) FLANGE

FEATURES

DIRECTLY REPLACES STANDARD INCANDESCENTS

- LONG LIFE / 100,000 HOURS
- SOLID STATE, HIGH SHOCK/ VIBRATION RESISTANT
- BUILT-IN CURRENT LIMITING RESISTOR FOR DIRECT APPLICATIONS FOR 2V to 240VAC
- CHOICE OF 8 COLORS
- LOW CURRENT, POWER SAVINGS to 100 - 500% AND MORE
- USED IN PILOT LIGHTS, INDUSTRIAL CONTROLS, LIGHTED PUSH BUTTON SWITCHES...

REPLACES FOLLOWING INCANDESCENTS

MINIATURE FLANGE: PR20, PR18, PR16, PR15, PR13, PR8, PR7, PR6, PR4, PR3, PR2...

PART NO.:

F 3 1 2 7 C R 6 - 2 8 V / 3 0 - P


MODEL #	LENS / COLOR / BRIGHT	VOLTS / mAmps Typ	POLARITY
CLUSTERED LEDs T3-1/4(9mm) FLANGE: F3127 = 7 LEDs F3126 = 6 LEDs	CR7, CR6, CR5, CO5, CY5, CLY5, CG5, CPG5, CB5, CW5 SPECIALS: COPG5=BICOLOR O/PG CRPG5=BICOLOR R/PG	3126:6Vf =NO RES. REQ'D 8V/60, 12V/60, 14V/60 3127:14Vf= NO RES.REQ'D 24V/30, 28V/30, 36V/20, 48V/20, 60V/15, 120VAV/10 Other Voltages / mAmps Available	CENTER CONTACT: P = ANODE (+) N = CATH. (-) P/NR = ANODE/ NO RESISTOR BP = BIPOLAR AC = VAC
MULTICHIP LEDs T3-1/4(9mm) FLANGE: 6 CHIP F3306, FM326	CR3K, CR7, CR6, CO6, CY6, CLY6, CG6, CPG6, CB6, CW6 SPECIALS: CRPG6 = BICOLOR R/PG COPG6 = BICOLOR O/PG	4Vf,6Vf,12Vf=NO RES. REQ'D 5V/60, 6V/60, 12V/30, 14V/30, 24V/20, 28V/20, 36V/15, 48V/15, 60V/12, 120VAC/8 Other Voltages / mAmps Available	CENTER CONTACT: P = ANODE (+) N = CATH. (-) P/NR = ANODE/ NO RESISTOR BP = BIPOLAR AC = VAC
DUAL CHIP LED T3-1/4(9mm) FLANGE: F3302, F322	CR3K, CR5, CO5, CY5, CG5,	4Vf =NO RES. REQ'D 5V/30, 6V/30, 12V/30, 14V/30, 24V/30, 28V/20... Other Voltages / mAmps Available	CENTER CONTACT: P = ANODE (+) N = CATH. (-) P/NR = ANODE/ NO RESISTOR AC = VAC
SINGLE CHIP LED T3-1/4(9mm) FLANGE: F330, F321	CR5K, CR3K, CR900, CR6, CR5, CO5, CY5, CLY5, CG5, CPG6, CPG5, CB4, CB5	2Vf =NO RES. REQ'D 5V/30, 6V/30, 12V/30, 14V/30, 24V/20, 28V/20... Other Voltages / mAmps Available	CENTER CONTACT: P = ANODE (+) N = CATH. (-) P/NR = ANODE/ NO RESISTOR AC = VAC
10mm BULB LED 1 CHIP / LOW COST FLANGE: F300	CR3K, CR6, CR4, CY4, CG4, TR6, TR4, TY4, TG4	2Vf = NO RES. REQ'D 5V/30, 6V/30, 12V/30, 14V/30, 24V/20, 28V/20... Other Voltages / mAmps Available	CENTER CONTACT: P = ANODE (+) N = CATH. (-) P/NR = ANODE/ NO RESISTOR

SPECIALS: BICOLORS, BLINKING, INFRAREDS, RIGHT-ANGLE ILLUMINATORS...


LENS TYPE: C=CLEAR, T=TRANSLUCENT (DIFFUSED),
COLOR CODES: R=RED, O=ORANGE, Y=AMBER YELLOW, LY=LIME YELLOW, G=GREEN,
PG=PURE GREEN, B=BLUE, W=WHITE (RED/GREEN)

BRIGHTNESS CODES: 900 = 900mcd WIDE RED, 3K = 3Kmcd NARROW RED, 7 = HI ULTRA RED ONLY,
6 = ULTRA, 5 = SUPER BRIGHT, 3/4 = HI EFFICIENCY


NOTE: WHEN PLACING ORDERS OR REQUESTING SAMPLES, PLEASE INDICATE INCANDESCENT LAMP NUMBER BEING REPLACED. WHEN SELECTING THE LED COLOR, MATCH EXISTING LENS COLOR TO LED COLOR.

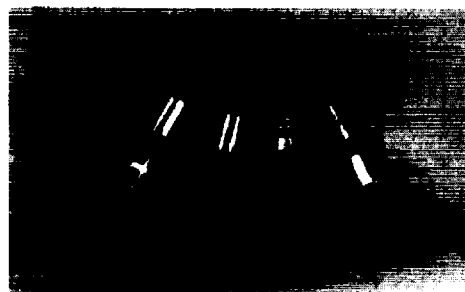


F3126, F3127

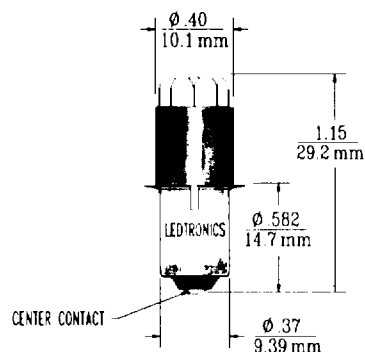


F330, F3302, F3306



F326



F300



F321, F322,

